


MOTOR COIL TABULATION										
CATALOG NUMBER	MATERIAL MASTER	L	A	B	C	D	HOLE QTY	FLATNESS -A-	WEIGHT kg / (lbs)	POWER CABLE (SEE BELOW)
A	LDC-C075200-DHT20 LDC-C075200-EHT20	PN-40191 PN-40192	234.0 [9.21]	100.00 [3.937]	166.67 [6.562]	----- -----	8	0.25 [.010]	4.55 [10.0]	18 18
	LDC-C075300-DHT20 LDC-C075300-EHT20	PN-40193 PN-40194	334.0 [13.15]	133.33 [5.249]	200.00 [7.874]	266.67 [10.499]	10	0.38 [.015]	6.36 [14.0]	18 18
	LDC-C075400-DHT20 LDC-C075400-EHT20	PN-40196 PN-40197	434.0 [17.09]	133.33 [5.249]	233.33 [9.186]	300.00 [11.811]	366.67 [14.436]	12	0.64 [.025]	8.18 [14]

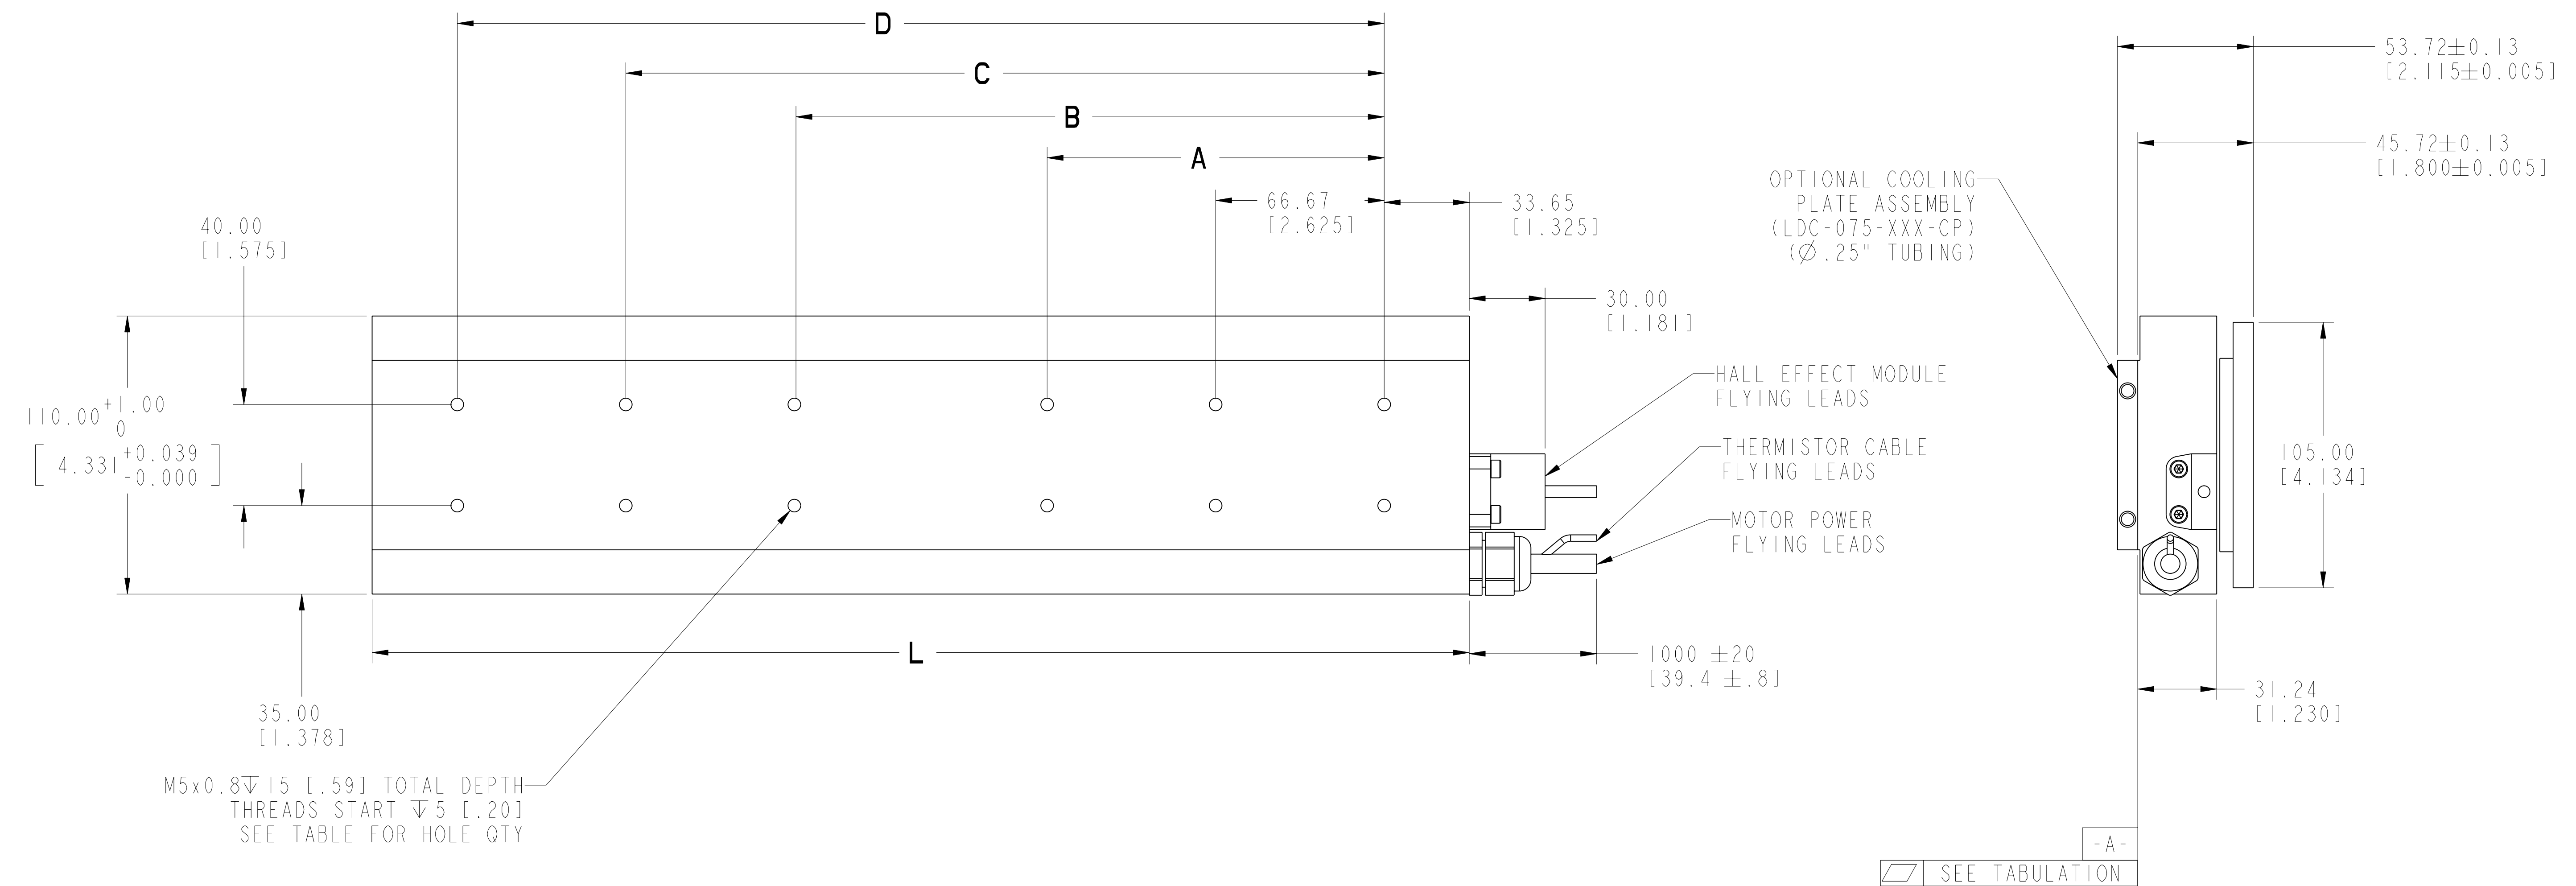

CABLE CODING		
	COLOR	FUNCTION
MOTOR POWER LEADS	RED	ØA [U]
	WHT	ØB [V]
	BLK	ØC [W]
	GRN/YEL	GND

THERMISTOR (PTC)	BLK	THERM
	BLK	THERM

HALL EFFECT (TRAP)	COLOR	FUNCTION	CABLE INFORMATION (ALL CABLES ARE NON-FLEX)					
			CABLE	# COND	GA	SHLD TYPE	DIAMETER	STATIC BEND RADIUS
	RED	V+	POWER	4	18	BRAID	Ø7.0 [.28]	18.0 [.70]
	WHT	S1	THERM	2	26	NONE	Ø4.0 [.16]	10.0 [.40]
	BLU	S2	HALL MOD	6	24	FOIL	Ø5.0 [.20]	15.0 [.59]
	ORN	S3						
	BLK	VRTN						
	GRN	NC						

REFERENCES		LDC-C075xxx-xHT20 MOTOR COIL		CONFIDENTIAL AND PROPRIETARY INFORMATION	
REVISION AUTHORIZATION	DIMENSIONS APPLY BEFORE SURFACE TREATMENT DIMENSIONS IN MILLIMETERS TOLERANCES UNLESS OTHERWISE SPECIFIED	DR. FS DATE 02-05-09		THIS DOCUMENT CONTAINS CONFIDENTIAL AND PROPRIETARY INFORMATION OF ROCKWELL AUTOMATION, INC. AND MAY NOT BE USED, COPIED OR DISCLOSED TO OTHERS, EXCEPT WITH THE AUTHORIZED WRITTEN PERMISSION OF ROCKWELL AUTOMATION, INC.	
	0 TO 6mm ±0.1	DATE		SHEET 1 OF 1	
	>6 TO 30mm ±0.2	CHKD. DATE		DWG. SIZE D 1000043825	
	>30mm ±0.3	APPD. DATE			
	ALL RADII ±0.2				
	ANGLES ±1°				