


MOTOR COIL TABULATION												
CATALOG NUMBER	MATERIAL MASTER	L	A	B	C	D	E	F	HOLE QTY	FLATNESS -A-	WEIGHT kg / [lbs]	POWER CABLE (SEE BELOW)
LDC-C100300-DHT20 LDC-C100300-EHT20	PN-40198 PN-40199	334.0 [13.15]	133.33 [5.249]	200.00 [7.874]	266.67 [10.499]	----	----	----	10	0.38 [.015]	7.71 [17]	18
LDC-C100400-DHT20 LDC-C100400-EHT20	PN-40200 PN-40201	434.0 [17.09]	133.33 [5.249]	233.33 [9.186]	300.00 [11.811]	366.67 [14.436]	----	----	12	0.64 [.025]	10.0 [22]	18
LDC-C100600-DHT20 LDC-C100600-EHT20	PN-40202 PN-40203	634.0 [25.31]	133.33 [5.249]	233.33 [9.186]	333.33 [13.123]	433.33 [17.060]	500.00 [19.686]	566.66 [22.310]	16	0.89 [.035]	15.45 [34]	16

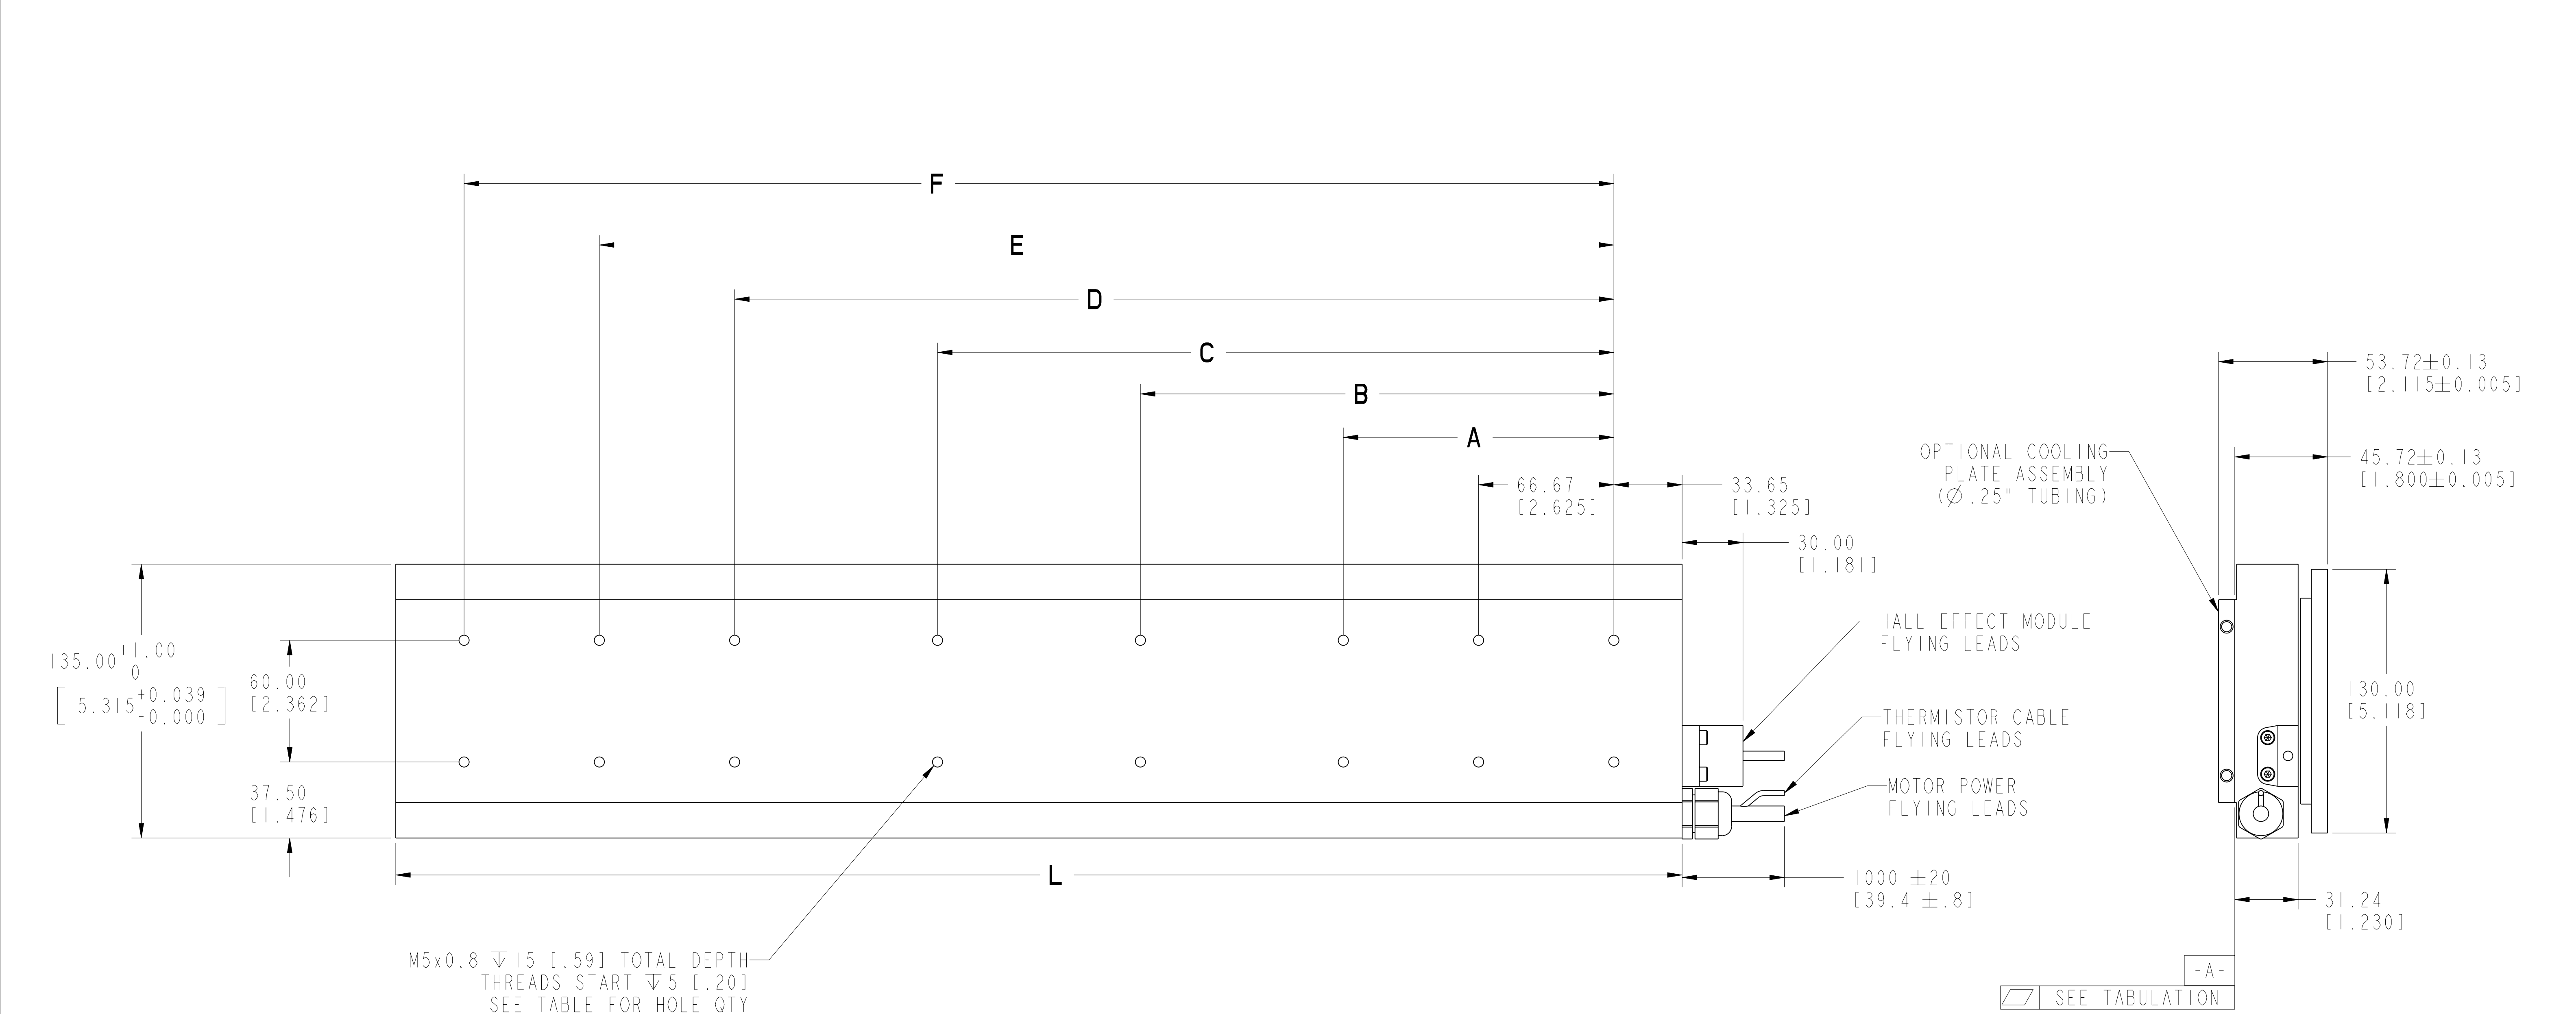

CABLE CODING		
MOTOR POWER LEADS	COLOR	FUNCTION
	RED	∅A [U]
	WHT	∅B [V]
	BLK	∅C [W]
	GRN/YEL	GND

THERMISTOR (PTC)	COLOR	FUNCTION
	BLK	THERM
	BLK	THERM

CABLE INFORMATION (ALL CABLES ARE NON-FLEX)									
HALL EFFECT (TRAP)	COLOR	FUNCTION	CABLE	# COND	WINDING	GA	SHLD TYPE	DIAMETER	STATIC BEND RADIUS
	RED	V+							
	WHT	S1							
	BLU	S2	POWER	4	600D D,E	16	BRAID	∅8.0 [.32]	22.0 [.87]
	ORN	S3				18		∅7.0 [.28]	18.0 [.70]
	BLK	VRTN	THERM	2		26	NONE	∅4.0 [.16]	10.0 [.40]
	GRN	NC	HALL MOD	6		24	FOIL	∅5.0 [.20]	15.0 [.59]

REFERENCES		LDC-C100xxx-xHT20 MOTOR COIL		CONFIDENTIAL AND PROPRIETARY INFORMATION	
REVISION AUTHORIZATION	DIMENSIONS APPLY BEFORE SURFACE TREATMENT. DIMENSIONS IN MILLIMETERS. TOLERANCES UNLESS OTHERWISE SPECIFIED.	Rockwell Automation		THIS DOCUMENT CONTAINS CONFIDENTIAL AND PROPRIETARY INFORMATION OF ROCKWELL AUTOMATION, INC. AND MAY NOT BE USED, COPIED OR DISCLOSED TO OTHERS, EXCEPT WITH THE AUTHORIZED WRITTEN PERMISSION OF ROCKWELL AUTOMATION, INC.	
	0 TO 6mm ±0.1	DR.	FS	DATE	02-05-09
	>6 TO 30mm ±0.2	CHKD.		DATE	
	>30mm ±0.3	APPD.		DATE	
	ALL RADII ±0.2			SHEET	1 OF 1
	ANGLES ±1°			DWG. SIZE	D
				10000043826	