


1	2	3	4	5	6	7	8					
CATALOG NUMBER	MATERIAL MASTER	L	A	B	C	D	E	F	HOLE QTY	FLATNESS -A-	WEIGHT kg / [lbs]	POWER CABLE (SEE BELOW)
LDC-C150400-DHT20 LDC-C150400-EHT20	PN-40204 PN-40205	434.0 [17.09]	133.33 [5.249]	233.33 [9.186]	300.00 [11.811]	366.67 [14.436]	----	----	18	0.64 [.025]	14.06 [31]	18
LDC-C150600-DHT20 LDC-C150600-EHT20	PN-40206 PN-40207	634.0 [25.31]	133.33 [5.249]	233.33 [9.186]	333.33 [13.123]	433.33 [17.060]	500.00 [19.686]	566.66 [22.310]	24	0.89 [.035]	20.63 [45.4]	18 16

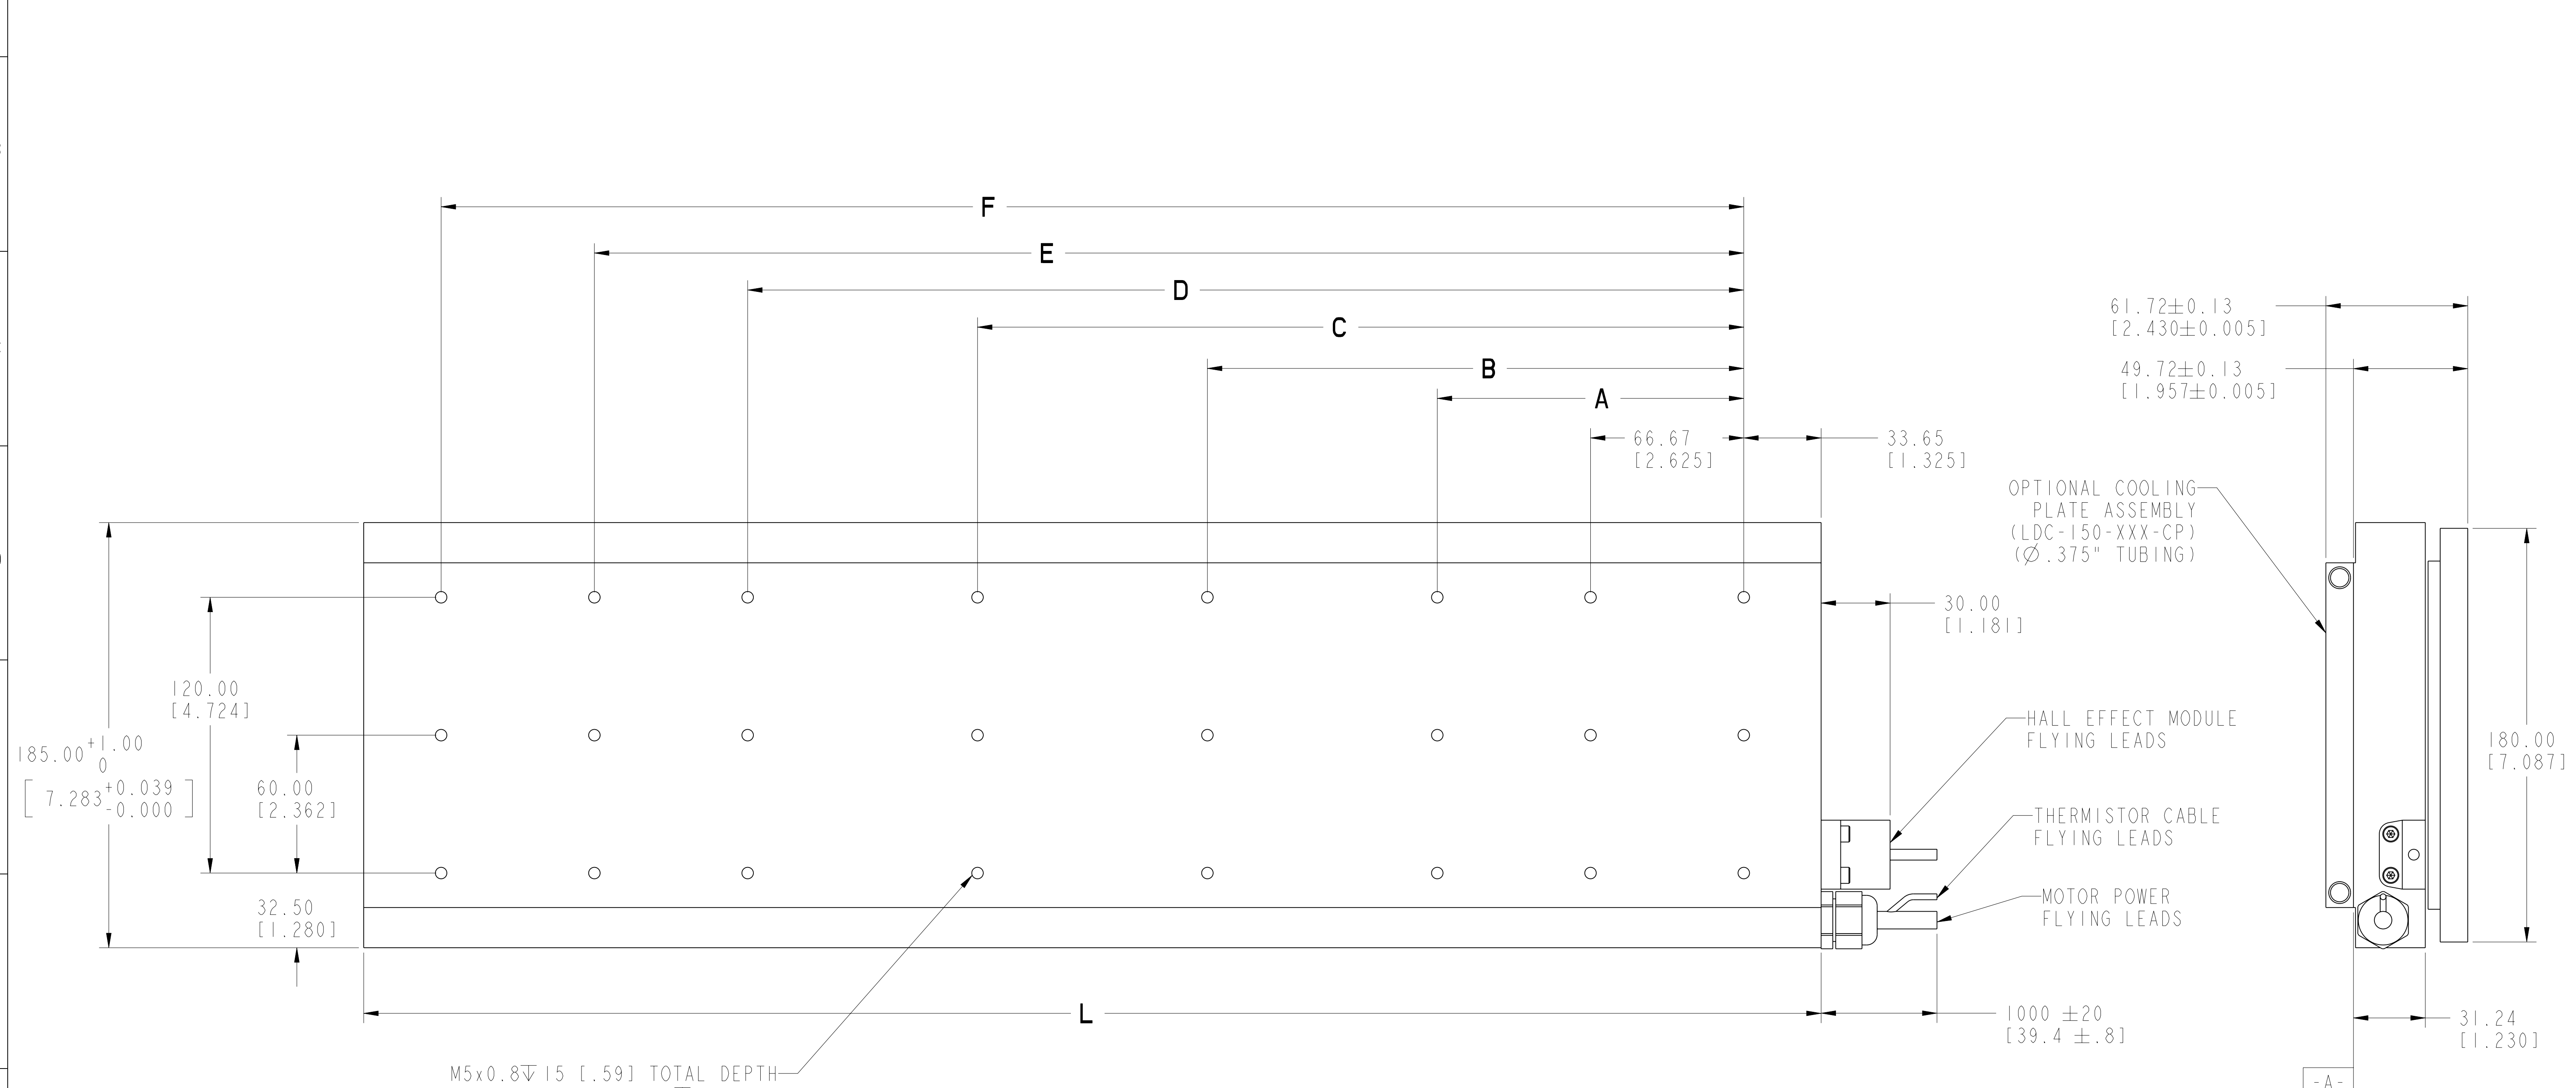

CABLE CODING		
	COLOR	FUNCTION
MOTOR POWER LEADS	RED	Ø A [U]
	WHT	Ø B [V]
	BLK	Ø C [W]
	GRN/YEL	GND

THERMISTOR (PTC)		
	COLOR	FUNCTION
THERMISTOR (PTC)	BLK	THERM
	BLK	THERM

CABLE INFORMATION (ALL CABLES ARE NON-FLEX)									
	CABLE	# COND	WINDING	GA	SHL TYPE	DIAMETER	STATIC BEND RADIUS		
HALL EFFECT (TRAP)	RED		V+						
	WHT		S1						
	BLU		S2	POWER	4	600D D,E	16	BRAID	Ø8.0 [.32] 22.0 [.87]
	ORN		S3	THERM	2		26	NONE	Ø7.0 [.28] 18.0 [.70]
	BLK		VRTN	HALL MOD	6		24	FOIL	Ø4.0 [.16] 10.0 [.40]
	GRN		NC						Ø5.0 [.20] 15.0 [.59]

REFERENCES		LDC-C150xxx-xHT20, ESM MOTOR COIL		CONFIDENTIAL AND PROPRIETARY INFORMATION	
REVISION AUTHORIZATION	DIMENSIONS APPLY BEFORE SURFACE TREATMENT. DIMENSIONS IN MILLIMETERS UNLESS OTHERWISE SPECIFIED.	DR.	FS	DATE	02-05-09
	0 TO 6mm ±0.1	CHKD.		DATE	
	>6 TO 30mm ±0.2	APPD.		DATE	
	>30mm ±0.3				
	ALL RADII ±0.2				
	ANGLES ±1°				
Rockwell Automation				SHEET	1 OF 1
				DWG. SIZE	D 10000043827