
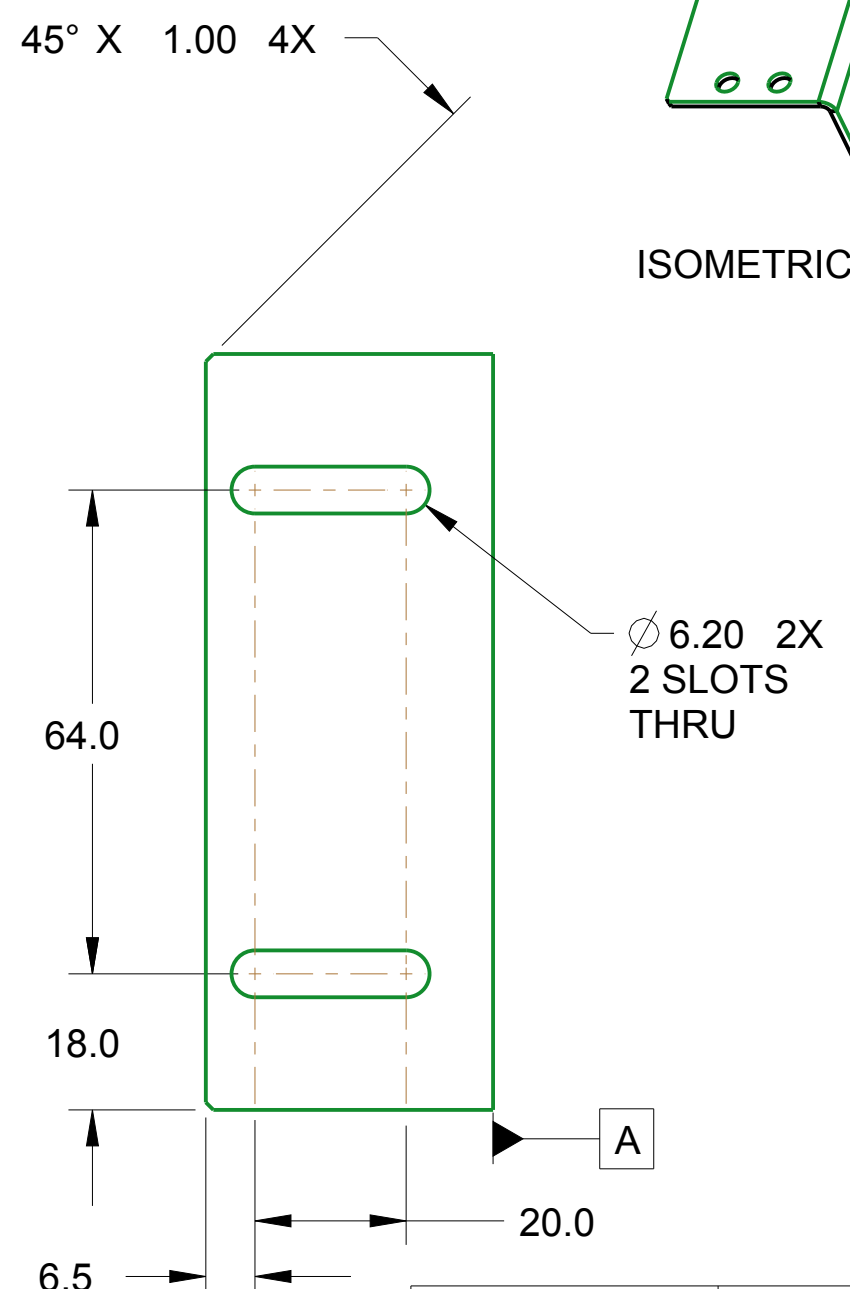
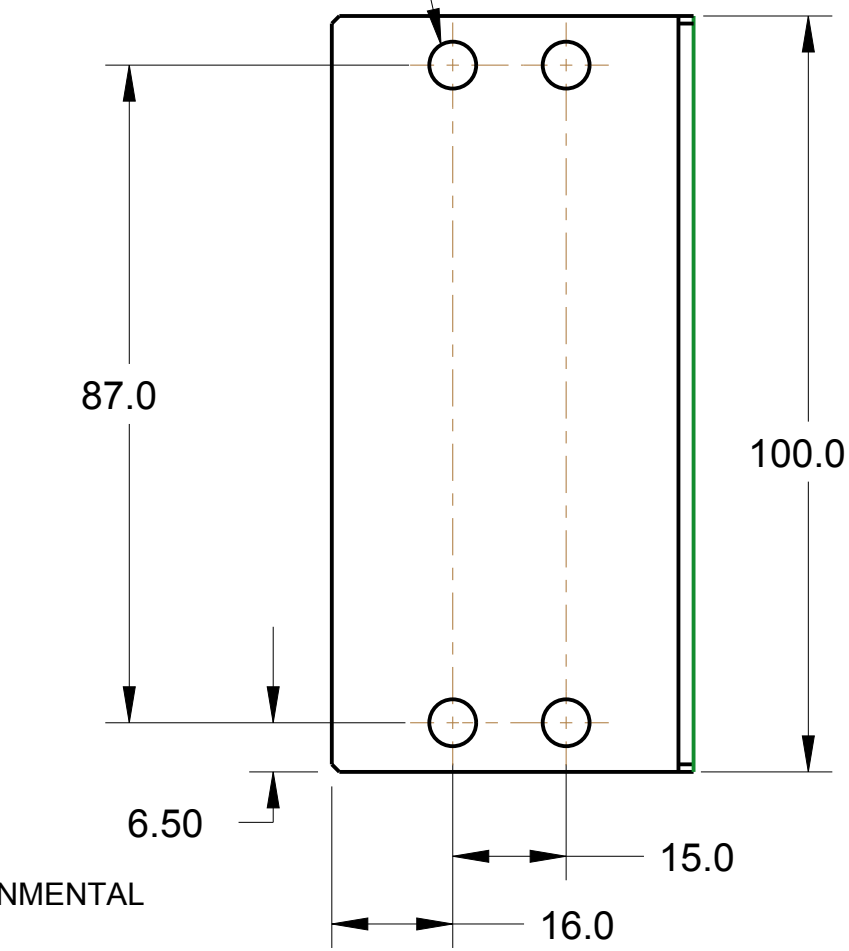
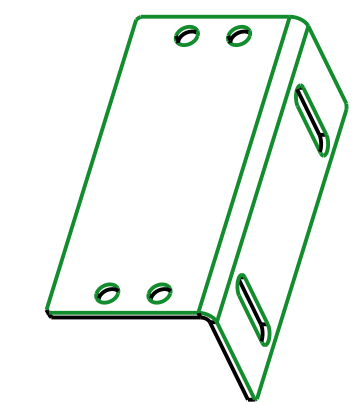


CLASSIFICATION TABLE

P=PERFORMANCE, F=FIT, A=ASSEMBLY (USE ONLY WITH \diamond SYMBOL)
 X=IDENTIFIES APPLICABLE CLASSIFICATION(S)
 \diamond =REQUIRED BY ENGINEERING AND/OR MANUFACTURING
 \textcircled{R} =STRICT CONFORMANCE TO SPECIFICATION REQUIRED AND IS NOT NEGOTIABLE (MAY BE REQUIRED BY REGULATORY AGENCY)

CHARACTERISTIC -OR- DIMENSION	COMMENT	DRAWING LOCATION (ZONE)	\diamond P	\diamond F	\diamond A	\textcircled{R}
SEE NOTE 3						X

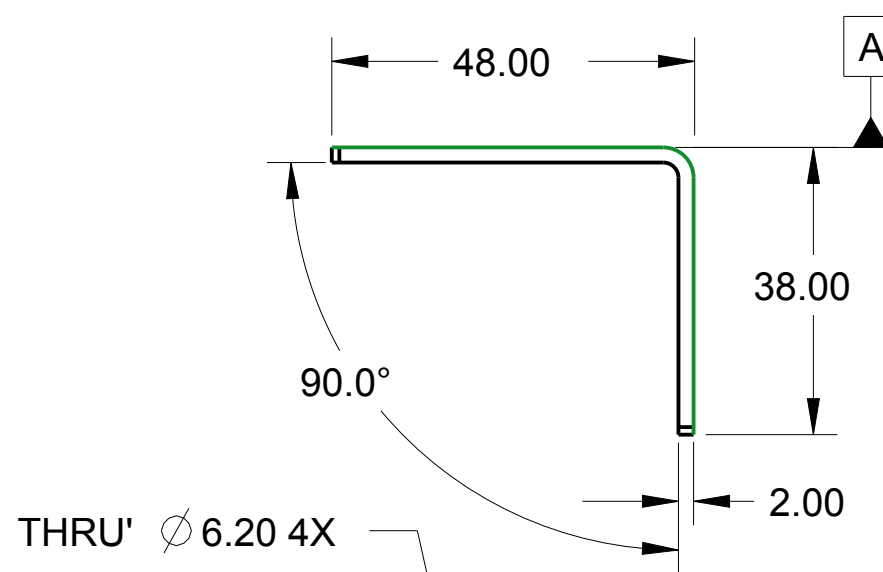

NOTES:

1. SURFACE FINISH TO BE EQUIVALENT TO N7 (1.6um Ra) TO N6 (0.8um Ra).
2. ALL BURRS AND SHARP EDGES TO BE REMOVED AND CLEANED AND DEGREASED BEFORE PLATING
- \textcircled{R} 3. PARTS MUST CONFORM WITH ROCKWELL AUTOMATION ENVIRONMENTAL SPECIFICATION 970-20-01.
4. ALL DIMENSIONS ARE IN MILLIMETERS.
5. BEND RASDIUS R2.

ANGULAR & LINEAR TOLERANCES - UNLESS OTHERWISE SPECIFIED	
X = \pm 2°	X = \pm 0.5mm
X.X = \pm 1°	X.X = \pm 0.2mm
X.XX = \pm 0.5°	X.XX = \pm 0.1mm
X.XXX = \pm 0.25°	X.XXX = \pm 0.05mm

MATERIAL	ALUMINIUM 5052 H32
FINISH	HARD ANODIZED GREY

Rockwell Automation

BRACKET, LIGHT LATCH ACTUATOR

Drawn by: AJMANCUS Date: 02-03-12

MATERIAL MASTER PN-76520	
CONFIDENTIAL AND PROPRIETARY INFORMATION. THIS DOCUMENT CONTAINS CONFIDENTIAL AND PROPRIETARY INFORMATION OF ROCKWELL AUTOMATION, INC. AND MAY NOT BE USED, COPIED OR DISCLOSED TO OTHERS, EXCEPT WITH THE AUTHORIZED WRITTEN PERMISSION OF ROCKWELL AUTOMATION, INC.	
Sheet 1 Of 1	
Size	Ver
B	10000109450
	02