



Model Number


UB500-30GM-H3
Single head system

Features

- Separate evaluation
- Direct detection mode

Diagrams

Characteristic response curves

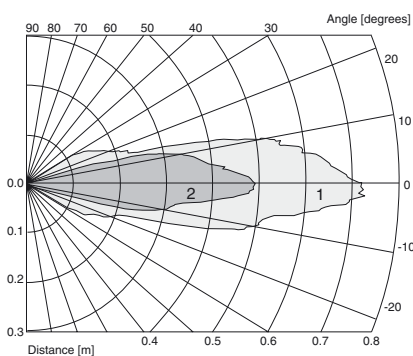


Curve 1: flat plate 100 mm x 100 mm
Curve 2: round bar, Ø 25 mm

Technical data

General specifications	
Sensing range	60 ... 500 mm
Unusable area	0 ... 60 mm
Standard target plate	100 mm x 100 mm
Transducer frequency	approx. 380 kHz
Electrical specifications	
Operating voltage U_B	10 ... 30 V DC , ripple 10 % _{SS}
No-load supply current I_0	≤ 30 mA
Input	
Input type	1 pulse input for transmitter pulse, activation through open collector npn < 1 V: emitter active, > 4 V: emitter inactive
Pulse length	10 ... 100 μs
Pause length	≥ 50 x pulse length
Output	
Output type	1 pulse output for echo propagation time, high-active, short-circuit proof
Signal level	1-level: ≥ $U_B - 3 V$; ≤ 10 mA level 0: ≤ 1 V ; ≤ 0,1 mA
Temperature influence	the echo propagation time: 0.17 % / K
Ambient conditions	
Ambient temperature	-25 ... 70 °C (-13 ... 158 °F)
Storage temperature	-40 ... 85 °C (-40 ... 185 °F)
Mechanical specifications	
Protection degree	IP65
Connection	2 m PVC cable 0.75 mm ²
Material	
Housing	nickel plated brass; plastic components: PBT
Transducer	epoxy resin/hollow glass sphere mixture; polyurethane foam
Mass	300 g
Compliance with standards and directives	
Standard conformity	
Standards	EN 60947-5-2:2007 IEC 60947-5-2:2007


Approvals and certificates	
UL approval	cULus Listed, General Purpose
CSA approval	cCSAus Listed, General Purpose

Dimensions

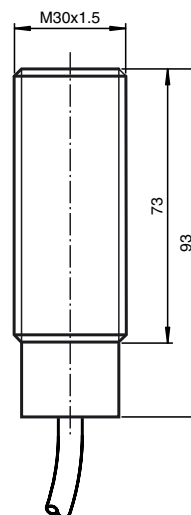

Release date: 2013-02-26 15:31 Date of issue: 2013-02-26 032867_eng.xml

Electrical Connection




Accessories


- BF 30**
Mounting flange, 30 mm
- BF 30-F**
Mounting flange with dead stop, 30 mm
- BF 5-30**
Universal mounting bracket for cylindrical sensors with a diameter of 5 ... 30 mm
- UVW90-M30**
Ultrasonic -deflector
- UVW90-K30**
Ultrasonic -deflector
- UH3-KHD2-4E5**
- UH3-KHD2-4I**
- UH3-T1-KT**

Function

The sensing range is determined in the downstream evaluation electronics such as PLC modules or other existing evaluation units.
 The object distance in pulse-echo mode is obtained from the echo time Δt . The emission of an ultrasonic pulse starts simultaneously with the falling slope of the clock input signal.



We recommend the usage of a npn-transistor to trigger the sensors clock input. The sensors clock input is connected to the +U_B potential internally by means of a pull up resistor.

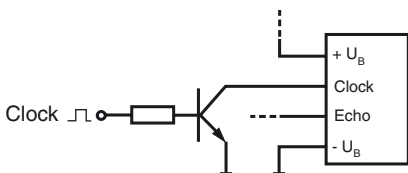

- 1) The unusable area (blind range) BR depends on the pulse duration T_i .
The unusable area reaches a minimum with the shortest pulse duration.
- 2) The sensors detection range depends on the pulse duration T_i .
With pulse duration < typical pulse duration, the sensors detection range may be reduced.

Release date: 2013-02-26 15:31 Date of issue: 2013-02-26 032867_eng.xml