
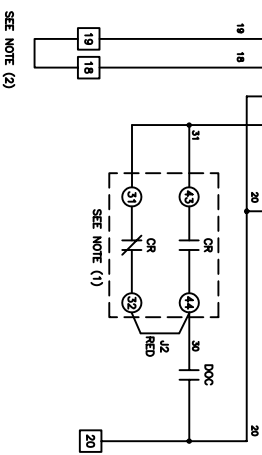


(1) IF THE "DRIVE/BYPASS ENABLE" RELAY (CR) IS USED, RED JUMPERS "J1" AND "J2" MUST BE REMOVED FROM RELAY (CR).  
 (2) IF HUMAN INTERFACE MODULE OR COMMUNICATION MODULE WILL BE USED FOR START/STOP LOGIC, JUMPER BETWEEN TERMINALS 18 AND 19 MUST BE MOVED TO 19 AND 20.

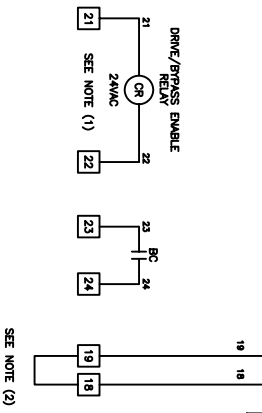

DATE	BY	APPROVAL
		DESIGN REVIEW
		FOR MANUFACTURING
		AS COMMISSIONED

REV.	DATE	BY	ECN/CR. NO.
B	6/19/07	REH	
C	12/7/07	AVR	
D	2/28/08	JFH	

DR. BY RELIANT	CHK. BY PARAG	ENG.
DATE 2/19/07	DATE 2/19/07	DATE

**Rockwell Automation**

THIS DRAWING IS THE PROPERTY OF ROCKWELL AUTOMATION, INC. OR ITS SUBSIDIARIES AND MAY NOT BE COPIED, USED OR DISCLOSED FOR ANY PURPOSES EXCEPT AS AUTHORIZED IN WRITING BY ROCKWELL AUTOMATION, INC.  
 SCHEMATIC DRAWING, PF70, STYLE C  
 1-25HP @ 480VAC

DOC	NO	98D01216-	NEGT	1	REV	1
-----	----	-----------	------	---	-----	---