# Safety thru-beam sensor





#### **Model Number**

### SLA29/73c

Safety thru-beam sensor with 4-pin, M12 connector

#### **Features**

- ٠ Detection range up to 30 m
- Self-monitoring (type 4 according to ٠ IEC/EN 61496-1)
- ٠ Red transmission light
- Integrated alignment aid •
- ٠ Clearly visible LED functional display and pre-fault indicator on the receiver
- Sturdy housing ٠
- Waterproof, protection class IP67
- Operation on control units of series • SB4 (SafeBox) and SC4-2

### Accessories

**OMH-05** 

Mounting aid

Mounting aid

Mounting aid

OMH-MLV11-K Mounting aid

**BA SLA28** Mounting aid Safety

MS SLP/SLA28 Mounting aid Safety

**MS SLPCM** Mounting aid Safety

SLA-1-M Additional accessories can be found in the Internet.

Subject to modifications without notice USA: +1 330 486 0001 Pepperl+Fuchs Group www.pepperl-fuchs.com fa-info@us.pepperl-fuchs.com


Germany: +49 621 776-4411 fa-info@pepperl-fuchs.com


Copyright Pepperl+Fuchs Singapore: +65 6779 9091 fa-info@sg.pepperl-fuchs.com




**OMH-21** 

**OMH-22** 



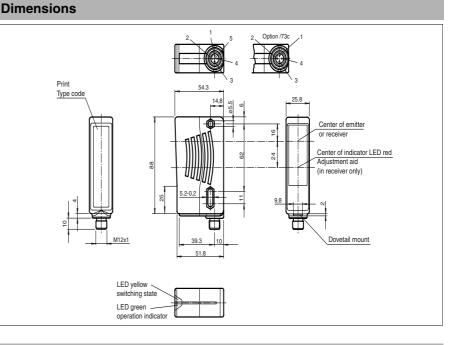

# **Electrical connection**

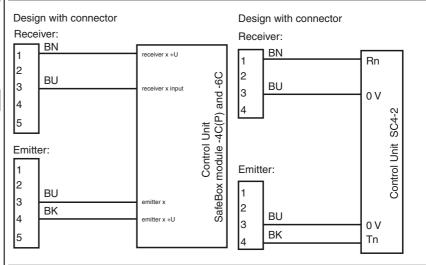

# **Pinout**







# **Technical data**


0.2 30 m
40 m
LED
red, modulated light
TÜV
IEC/EN 61496
4
CE
static: 30 mm dynamic: 40 mm (at v = 1.6 m/s of the obstacle)
LED red in receiver
<5 °
SIL 3
PLe
Cat. 4
20 a
4.4 E-10
LED green
LED yellow: 1. LED lits constantly: signal > 2 x switching point (function reserve) 2. LED flashes: signal between 1 x switching point and 2 x switching point 3. LED off: signal < switching point
Power supply via control unit
-20 60 °C (253 333 K)
-20 70 °C (253 343 K)
max. 95 %, not condensing
IP67 according to EN 60529
M12 connector, 4-pin
ABS plastic, RLA 1021 (yellow) painted
Plastic pane
per device 70 g
SLA29-T/73c

## **Curves/Diagrams**

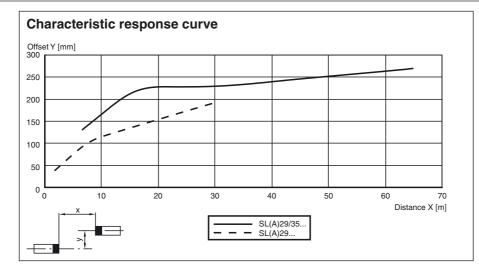



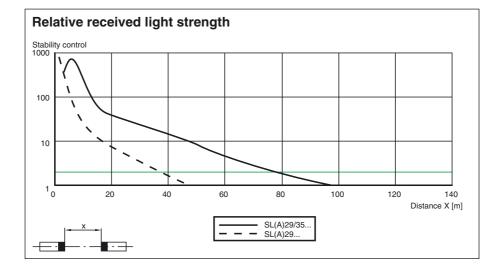

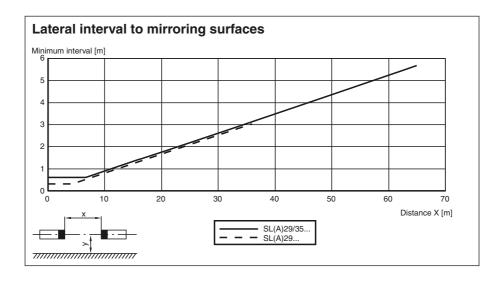

### Additional information

For much easier alignment even for lond distance applications, an additional red LED is located in the receivers optics:

- LED constantly illuminated: signal strength < switching level</li>
- LED flashes: signal strength is between 1-fold switching level and 2-fold switching level
- LED off:
  - signal strength  $\geq$  2-fold switching level (function reserve)

## System accessories

#### **Control units**

SC4-2

SB4 (SafeBox)

# Cable sockets

Option /73c:

straight:	V1-G-2M-PVC
	V1-G-5M-PVC
	V1-G-10M-PVC
angled:	V1-W-2M-PVC
	V1-W-5M-PVC
	V1-W-10M-PVC

Option /105:

118439 ENG.xml



#### Option /116: no

#### Mounting aids

OMH-21 OMH-22 OMH-05 OMH-MLV11-K

### **Further accessories**

Laser alignment aid BA SLA28

Muting Set MS SLP/SLA28

Redirection mirror SLA-1-M

SLA29/73c