




**Model Number**

NCB50-FP-E2-P1-V1-3G-3D


**Features**

- 50 mm flush
- 3-wire DC

**Connection**



**Pinout**




Wire colors in accordance with EN 60947-5-2

|   |    |         |
|---|----|---------|
| 1 | BN | (brown) |
| 2 | WH | (white) |
| 3 | BU | (blue)  |
| 4 | BK | (black) |

**Accessories**

- V1-G**  
4-pin, M12 female field-attachable connector
- V1-W**  
4-pin, M12 female field-attachable connector
- V1-G-2M-PUR**  
Cable socket, M12, 4-pin, PUR cable
- V1-W-2M-PUR**  
Cable socket, M12, 4-pin, PUR cable

**Dimensions**

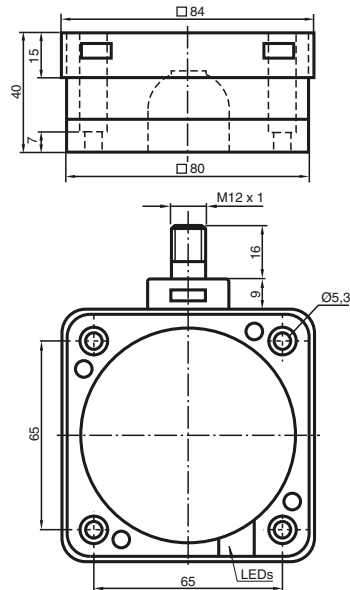

**Technical Data**

**General specifications**

|                            |                     |
|----------------------------|---------------------|
| Switching element function | PNP NO              |
| Rated operating distance   | $s_n$ 50 mm         |
| Installation               | flush               |
| Output polarity            | DC                  |
| Assured operating distance | $s_a$ 0 ... 40.5 mm |
| Reduction factor $r_{Al}$  | 0.38                |
| Reduction factor $r_{Cu}$  | 0.35                |
| Reduction factor $r_{304}$ | 0.83                |

**Nominal ratings**

|                                   |       |                            |
|-----------------------------------|-------|----------------------------|
| Operating voltage                 | $U_B$ | 10 ... 60 V DC             |
| Switching frequency               | $f$   | 0 ... 80 Hz                |
| Hysteresis                        | $H$   | typ. 3 %                   |
| Reverse polarity protected        |       | reverse polarity protected |
| Voltage drop                      | $U_d$ | $\leq 3$ V                 |
| Operating current                 | $I_L$ | 0 ... 200 mA               |
| Off-state current                 | $I_r$ | 0 ... 0.5 mA               |
| No-load supply current            | $I_0$ | $\leq 20$ mA               |
| Operating voltage display         |       | LED, green                 |
| Indication of the switching state |       | LED, yellow                |

**Functional safety related parameters**

|                          |       |
|--------------------------|-------|
| MTTF <sub>d</sub>        | 960 a |
| Mission Time ( $T_M$ )   | 20 a  |
| Diagnostic Coverage (DC) | 0 %   |

**Ambient conditions**

|                     |                                |
|---------------------|--------------------------------|
| Ambient temperature | -25 ... 70 °C (-13 ... 158 °F) |
|---------------------|--------------------------------|

**Mechanical specifications**

|                   |                                 |
|-------------------|---------------------------------|
| Connection type   | Device connector M12 x 1, 4-pin |
| Housing material  | PBT                             |
| Sensing face      | PBT                             |
| Housing base      | PBT                             |
| Protection degree | IP67                            |

**General information**

|                           |                         |
|---------------------------|-------------------------|
| Use in the hazardous area | see instruction manuals |
| Category                  | 3G; 3D                  |

**Compliance with standards and directives**

|                     |   |
|---------------------|---|
| Standard conformity |   |
| Standards           | EN 60947-5-2:2007<br>IEC 60947-5-2:2007 |

**Approvals and certificates**


|              |   |
|--------------|---|
| UL approval  | cULus Listed, General Purpose                     |
| CSA approval | cCSAus Listed, General Purpose                    |
| CCC approval | Certified by China Compulsory Certification (CCC) |

Release date: 2012-05-30 13:47 Date of issue: 2012-05-30 129867\_eng.xml

**Installation hint**



These sensors are especially designed for embeddable mounting in conveyor floors. Due to its precise location in metal base plates the sensor is afforded a high degree of mechanical protection. No clearance is required between the sensor and the base plate, avoiding the need for protective guarding to prevent possible foot injury.

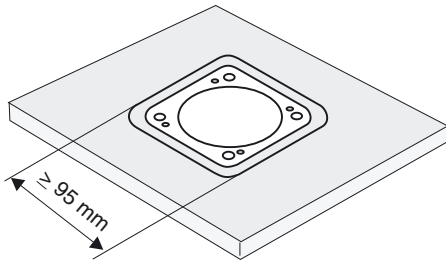The large sensing range ensures positive detection, and thus provides consistent control and monitoring of the conveyor.





**Warning!**  
Once the metal screening has been removed, the sensor can no longer be embeddable mounted.

**ATEX 3G (nA)**

|  |   |
|--|---|
| Instruction  | <b>Manual electrical apparatus for hazardous areas</b>  |
| <b>Device category 3G (nA)</b>                     | for use in hazardous areas with gas, vapour and mist  |
| Directive conformity                               | 94/9/EG   |
| Standard conformity                                | EN 60079-0:2006, EN 60079-15:2005   |
| CE symbol  | Ignition protection category "n"<br>Use is restricted to the following stated conditions<br>   |
| Ex-identification                                  |  II 3G Ex nA IIC T6 X  |
| General  | The apparatus has to be operated according to the appropriate data in the data sheet and in this instruction manual. The data stated in the data sheet are restricted by this operating instruction! The special conditions must be observed!   |
| Installation, Commissioning                        | Laws and/or regulations and standards governing the use or intended usage goal must be observed.  |
| Maintenance  | No changes can be made to apparatus, which are operated in hazardous areas.<br>Repairs to these apparatus are not possible.   |
| <b>Special conditions</b>                          |   |
| Maximum operating current $I_L$                    | The maximum permissible load current must be restricted to the values given in the following list. High load currents and load short-circuits are not permitted.  |
| Maximum operating voltage $U_{Bmax}$               | The maximum permissible operating voltage $U_B$ max is restricted to the values in the following list. Tolerances are not permissible.  |
| Maximum permissible ambient temperature $T_{Umax}$ | dependant of the load current $I_L$ and the max. operating voltage $U_{Bmax}$ .<br>Information can be taken from the following list.  |
| at $U_{Bmax}=60$ V, $I_L=200$ mA                   | 44 °C (111.2 °F)  |
| at $U_{Bmax}=60$ V, $I_L=100$ mA                   | 45 °C (113 °F)  |
| at $U_{Bmax}=60$ V, $I_L=25$ mA                    | 47 °C (116.6 °F)  |
| at $U_{Bmax}=30$ V, $I_L=200$ mA                   | 50 °C (122 °F)  |
| at $U_{Bmax}=30$ V, $I_L=100$ mA                   | 53 °C (127.4 °F)  |
| at $U_{Bmax}=30$ V, $I_L=50$ mA                    | 56 °C (132.8 °F)  |
| Plug connector                                     | The plug connector must not be disconnected under voltage. The proximity switch is marked as follows: "DO NOT DISCONNECT UNDER VOLTAGE!" When the plug connector is disconnected the ingress of dirt into the inner areas (i.e. the areas, which are not accessible in the plugged-in condition) must be prevented.   |
| Protection from mechanical danger                  | The sensor must not be exposed to <b>ANY FORM</b> of mechanical danger.   |
| Protection from UV light                           | The sensor and the connection cable must be protected from damaging UV-radiation. This can be achieved when the sensor is used in internal areas.   |
| Electrostatic charging                             | When used in group IIC non-permissible electrostatic charges should be avoided on the plastic housing parts. Electrostatic charges must be avoided on the mechanical housing components. Dangerous electrostatic charges on the mechanical housing components can be avoided by incorporating these in the equipotential bonding. The apparatus is provided with an outer lacquered metallic screen, which must be protected from electrostatic charging. |

## ATEX 3D

|                                      |  |
|--------------------------------------|--|
| Note                                 | <b>This instruction is only valid for products according to EN 50281-1-1, valid until 30-September-2008</b><br>Note the ex-marking on the sensor or on the enclosed adhesive label   |
| <b>Instruction</b>                   | <b>Manual electrical apparatus for hazardous areas</b>   |
| <b>Device category 3D</b>            | for use in hazardous areas with non-conducting combustible dust  |
| Directive conformity                 | 94/9/EG  |
| Standard conformity                  | EN 50281-1-1   |
|                                      | Protection via housing   |
|                                      | Use is restricted to the following stated conditions   |
| CE symbol                            |   |
| Ex-identification                    |  II 3D IP67 T 95 °C (203 °F) X  |
| General                              | The apparatus has to be operated according to the appropriate data in the data sheet and in this instruction manual.<br>The data stated in the data sheet are restricted by this operating instruction! The special conditions must be adhered to!<br>Laws and/or regulations and standards governing the use or intended usage goal must be observed.   |
| Installation, Commissioning          |  |
| Maintenance                          | No changes can be made to apparatus, which are operated in hazardous areas.<br>Repairs to these apparatus are not possible.  |
| <b>Special conditions</b>            |  |
| Maximum operating current $I_L$      | The maximum permissible load current must be restricted to the values given in the following list.<br>High load currents and load short-circuits are not permitted.  |
| Maximum operating voltage $U_{Bmax}$ | The maximum permissible operating voltage $U_{Bmax}$ must be restricted to the values given in the following list. Tolerances are not permitted.   |
| Maximum heating (Temperature rise)   | dependant of the load current $I_L$ and the max. operating voltage $U_{Bmax}$ .<br>Information can be taken from the following list. The maximum surface temperature at maximum ambient temperature is given in the Ex identification of the apparatus.  |
| at $U_{Bmax}=60$ V, $I_L=200$ mA     | 25 K   |
| at $U_{Bmax}=60$ V, $I_L=100$ mA     | 24 K   |
| at $U_{Bmax}=60$ V, $I_L=25$ mA      | 22 K   |
| at $U_{Bmax}=30$ V, $I_L=200$ mA     | 19 K   |
| at $U_{Bmax}=30$ V, $I_L=100$ mA     | 16 K   |
| at $U_{Bmax}=30$ V, $I_L=50$ mA      | 14 K   |
| Plug connector                       | The plug connector must not be disconnected under voltage. The proximity switch is marked as follows: "DO NOT DISCONNECT UNDER VOLTAGE!" When the plug connector is disconnected the ingress of dirt into the inner areas (i.e. the areas, which are not accessible in the plugged-in condition) must be prevented.<br>The plug connection can only be separated using a tool. This is achieved by using the locking protection V1-Clip (Mounting accessory from Pepperl + Fuchs). |
| Protection from mechanical danger    | The sensor must not be mechanically damaged.   |
| Electrostatic charging               | Sliding contact discharges must be avoided. The apparatus is provided with an outer lacquered metallic screen, which must be protected from electrostatic charging.  |

**ATEX 3D (tD)**

Note

**This instruction is only valid for products according to EN 61241-0:2006 and EN 61241-1:2004**  
Note the ex-marking on the sensor or on the enclosed adhesive label

**Instruction****Manual electrical apparatus for hazardous areas****Device category 3D**

for use in hazardous areas with combustible dust

Directive conformity

94/9/EG

Standard conformity

EN 61241-0:2006, EN 61241-1:2004


Protection via housing "tD"

Use is restricted to the following stated conditions

CE symbol



Ex-identification

 II 3D Ex tD A22 IP67 T80°C X

General

The apparatus has to be operated according to the appropriate data in the data sheet and in this instruction manual.  
The maximum surface temperature has been determined in accordance with method A without a dust layer on the equipment.

The data stated in the data sheet are restricted by this operating instruction!

The special conditions must be adhered to!

Installation, Commissioning

Laws and/or regulations and standards governing the use or intended usage goal must be observed.

Maintenance

No changes can be made to apparatus, which are operated in hazardous areas.

Repairs to these apparatus are not possible.

**Special conditions**Maximum operating current  $I_L$ 

The maximum permissible load current must be restricted to the values given in the following list.

High load currents and load short-circuits are not permitted.

Maximum operating voltage  $U_{Bmax}$ The maximum permissible operating voltage  $U_{Bmax}$  must be restricted to the values given in the following list. Tolerances

are not permitted.

Maximum permissible ambient temperature  $T_{Umax}$ dependant of the load current  $I_L$  and the max. operating voltage  $U_{Bmax}$ .

Information can be taken from the following list.

at  $U_{Bmax}=60$  V,  $I_L=200$  mA

44 °C (111.2 °F)

at  $U_{Bmax}=60$  V,  $I_L=100$  mA

45 °C (113 °F)

at  $U_{Bmax}=60$  V,  $I_L=25$  mA

47 °C (116.6 °F)

at  $U_{Bmax}=30$  V,  $I_L=200$  mA

50 °C (122 °F)

at  $U_{Bmax}=30$  V,  $I_L=100$  mA

53 °C (127.4 °F)

at  $U_{Bmax}=30$  V,  $I_L=50$  mA

56 °C (132.8 °F)

Plug connector

The plug connector must not be withdrawn under voltage. The proximity switch is identified as follows: "WARNING - DO NOT SEPARATE WHEN ENERGIZED". With the plug connector disconnected, soiling of the internal area must be prevented. (i.e. the area that is inaccessible when the connector is inserted) The plug connection can only be separated using a tool. This is achieved by using the locking protection V1-Clip (Mounting accessory from Pepperl + Fuchs).

Protection from mechanical danger

The sensor must not be exposed to **ANY FORM** of mechanical danger.

Protection from UV light

The sensor and the connection cable must be protected from damaging UV-radiation. This can be achieved when the sensor is used in internal areas.

Electrostatic charging

Sliding contact discharges must be avoided. The apparatus is provided with an outer lacquered metallic screen, which must be protected from electrostatic charging.