




### Model Number

NJ30+U1+A2-3D

### Features

- Comfort series
- 30 mm not embeddable

### Connection




### Accessories

#### MHW 01

Mounting aid

## Dimensions

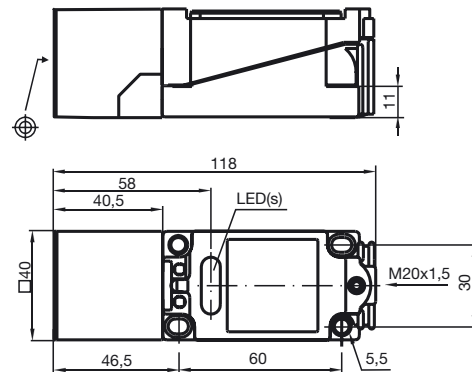

## Technical Data

### General specifications

Switching element function	PNP	Antivalent
Rated operating distance	$s_n$	30 mm
Installation	not embeddable	
Output polarity	DC	
Assured operating distance	$s_a$	0 ... 24.3 mm
Reduction factor $r_{AI}$	0.45	
Reduction factor $r_{Cu}$	0.4	
Reduction factor $r_{V2A}$	0.8	

### Nominal ratings

Operating voltage	$U_B$	10 ... 60 V
Switching frequency	$f$	0 ... 100 Hz
Hysteresis	$H$	1 ... 10 typ. 5 %
Reverse polarity protection	protected against reverse polarity	
Short-circuit protection	pulsing	
Voltage drop	$U_d$	$\leq 2.8$ V
Operating current	$I_L$	0 ... 200 mA
No-load supply current	$I_0$	$\leq 10$ mA
Operating voltage display	LED, green	
Indication of the switching state	LED, yellow	

### Standard conformity

Standards	IEC / EN 60947-5-2:2004
-----------	-------------------------

### Ambient conditions

Ambient temperature	-25 ... 70 °C (248 ... 343 K)
---------------------	-------------------------------

### Mechanical specifications

Connection type	terminal compartment
Core cross-section	up to 2.5 mm <sup>2</sup>
Housing material	PBT
Sensing face	PBT
Protection degree	IP67

### General information

Use in the hazardous area	see instruction manuals
Category	3D

**ATEX 3D**

Instruction

**Manual electrical apparatus for hazardous areas****Device category 3D**

Directive conformity

Standard conformity

for use in hazardous areas with non-conducting combustible dust

94/9/EG

EN 50281-1-1


Protection via housing

Use is restricted to the following stated conditions

CE symbol



Ex-identification

 II 3D IP67 T 113 °C X

General

The apparatus has to be operated according to the appropriate data in the data sheet and in this instruction manual.

The data stated in the data sheet are restricted by this operating instruction! The special conditions must be adhered to!

Installation, Commissioning

Laws and/or regulations and standards governing the use or intended usage goal must be observed.

Maintenance

No changes can be made to apparatus, which are operated in hazardous areas.

Repairs to these apparatus are not possible.

[Fett]Special conditions

Maximum operating current  $I_L$ 

The maximum permissible load current must be restricted to the values given in the following list.

High load currents and load short-circuits are not permitted.

Maximum operating voltage  $U_{Bmax}$ The maximum permissible operating voltage  $U_{Bmax}$  must be restricted to the values given in the following list. Tolerances are not permitted.

Maximum heating (Temperature rise)

dependant of the load current  $I_L$  and the max. operating voltage  $U_{Bmax}$ .

Information can be taken from the following list. The maximum surface temperature at maximum ambient temperature is given in the Ex identification of the apparatus.

at  $U_{Bmax}=60\text{ V}$ ,  $I_L=200\text{ mA}$ 

43 °C

at  $U_{Bmax}=60\text{ V}$ ,  $I_L=100\text{ mA}$ 

40 °C

at  $U_{Bmax}=60\text{ V}$ ,  $I_L=50\text{ mA}$ 

38 °C

at  $U_{Bmax}=30\text{ V}$ ,  $I_L=200\text{ mA}$ 

27 °C

at  $U_{Bmax}=30\text{ V}$ ,  $I_L=100\text{ mA}$ 

23 °C

Plug connector

The plug connector must not be disconnected under voltage. The proximity switch is marked as follows: "DO NOT DISCONNECT UNDER VOLTAGE!" When the plug connector is disconnected the ingress of dirt into the inner areas (i.e. the areas, which are not accessible in the plugged-in condition) must be prevented.

Protection from mechanical danger

The sensor must not be mechanically damaged.

Connections for external wire

Terminal connection: Minimum conductor cross-section: 0.5 mm<sup>2</sup>, maximum conductor cross-section: 2.5 mm<sup>2</sup>. The ends of the conductor must be provided with cable sleeves.

Lead insertion

The cable entry must be such, that no tension load or twist is applied to the cable

The protection category must be in accordance with EN 60529 and as stated in the data sheet. The cable entry must be designed so that there are no sharp edges to damage the cable and impair the level of protection of the sensor. The cable entry must be in accordance with the relevant European standard for industrial cable and lead entries.. In addition, in the case of flexible leads, the points of entry of the cable must be rounded off over an angle of at least 75°, with a radius (R), which is at least one quarter of the maximum permissible cable diameter for the entry, but not greater than 3 mm.