



Direct mounting on standard actuators
 Compact and stable housing
 Fixed setting
 Satisfies machinery directive

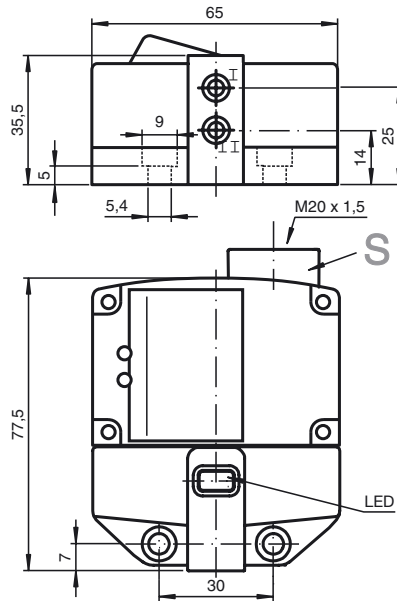

General specifications	
Switching element function	PNP Dual Make function
Rated operating distance s_n	3 mm
Installation	embeddable
Output polarity	DC
Assured operating distance s_a	0 ... 2.43 mm
Reduction factor r_{AI}	0.5
Reduction factor r_{Cu}	0.4
Reduction factor r_{V2A}	1
Reduction factor r_{SI37}	1.2
Reduction factor r_{Ms}	
Nominal ratings	
Operating voltage U_B	10 ... 30 V
Switching frequency f	0 ... 500 Hz
Hysteresis H	typ. 5 %
Reverse polarity protection	all connections
Short-circuit protection	pulsing
Voltage drop U_d	≤ 3 V
Operating current I_L	0 ... 100 mA
Off-state current I_r	0 ... 0.5 mA typ. 0.1 μ A
No-load supply current I_0	≤ 25 mA
Operating voltage display	LED, green
Indication of the switching state	LED, yellow
Standard conformity	
EMC in accordance with	IEC / EN 60947-5-2:2004
Standards	IEC / EN 60947-5-2:2004
Ambient conditions	
Ambient temperature	-25 ... 70 °C (248 ... 343 K)
Storage temperature	
Mechanical specifications	
Connection (system side)	Cage clamp terminals
Core cross-section (system side)	1.5/2.5 mm ² flexible/rigid
Housing material	PBT
Sensing face	PBT
Protection degree	IP65
General information	
Use in the hazardous area	see instruction manuals
Category	3G; 3D

Connection type:



2006-06-27 - 186051_ENG.xml

ATEX 3G (nA)

Instruction

Device category 3G (nA)

Directive conformity

Standard conformity

CE symbol

Ex-identification

General

Installation, Commissioning

Maintenance

Special conditions

Maximum operating current I_L

Maximum operating voltage U_{Bmax}

Maximum permissible ambient temperature T_{Umax}

at $U_{Bmax}=30\text{ V}$, $I_L=100\text{ mA}$

at $U_{Bmax}=30\text{ V}$, $I_L=50\text{ mA}$

at $U_{Bmax}=30\text{ V}$, $I_L=25\text{ mA}$

Protection from mechanical danger

Protection from UV light

Connections for external wire

Lead insertion

Manual electrical apparatus for hazardous areas

for use in hazardous areas with gas, vapour and mist

94/9/EG

EN 60079-15:2003

Ignition protection category "n"

Use is restricted to the following stated conditions

CE

II 3G EEx nA IIC T6 X

The apparatus has to be operated according to the appropriate data in the data sheet and in this instruction manual.

The data stated in the data sheet are restricted by this operating instruction! The special conditions must be observed!

Laws and/or regulations and standards governing the use or intended usage goal must be observed.

No changes can be made to apparatus, which are operated in hazardous areas. Repairs to these apparatus are not possible.

The maximum permissible load current must be restricted to the values given in the following list. High load currents and load short-circuits are not permitted.

The maximum permissible operating voltage U_{Bmax} is restricted to the values in the following list. Tolerances are not permissible.

dependant of the load current I_L and the max. operating voltage U_{Bmax} . Information can be taken from the following list.

42 °C

46 °C

47 °C

The sensor must not be exposed to **ANY FORM** of mechanical danger.

The sensor and the connection cable must be protected from damaging UV-radiation. This can be achieved when the sensor is used in internal areas.

The connecting cable must not be disconnected under voltage!

Terminal connection: minimum conductor cross-section: 0.5 mm², maximum conductor cross-section: 2.5 mm².

The cable entry must be such, that no tension load or twist is applied to the cable

The protection category must be in accordance with EN 60529 and as stated in the data sheet. The cable entry must be designed so that there are no sharp edges to damage the cable and impair the level of protection of the sensor. The cable entry must be in accordance with the relevant European standard for industrial cable and lead entries.. In addition, in the case of flexible leads, the points of entry of the cable must be rounded off over an angle of at least 75°, with a radius (R), which is at least one quarter of the maximum permissible cable diameter for the entry, but not greater than 3 mm.

ATEX 3D

Instruction

Device category 3D

Directive conformity
Standard conformity

CE symbol

Ex-identification

General

Installation, Commissioning

Maintenance

[Fett]Special conditions

Maximum operating current I_L

Maximum operating voltage U_{Bmax}

Maximum heating (Temperature rise)

at $U_{Bmax}=30\text{ V}$, $I_L=100\text{ mA}$

at $U_{Bmax}=30\text{ V}$, $I_L=50\text{ mA}$

at $U_{Bmax}=30\text{ V}$, $I_L=25\text{ mA}$

Protection from mechanical danger

Connections for external wire

Lead insertion

Manual electrical apparatus for hazardous areas

for use in hazardous areas with non-conducting combustible dust
94/9/EG

EN 50281-1-1

Protection via housing

Use is restricted to the following stated conditions

CE

Ex II 3D IP65 T 98 °C X

The apparatus has to be operated according to the appropriate data in the data sheet and in this instruction manual.

The data stated in the data sheet are restricted by this operating instruction! The special conditions must be adhered to!

Laws and/or regulations and standards governing the use or intended usage goal must be observed.

No changes can be made to apparatus, which are operated in hazardous areas. Repairs to these apparatus are not possible.

The maximum permissible load current must be restricted to the values given in the following list.

High load currents and load short-circuits are not permitted.

The maximum permissible operating voltage U_{Bmax} must be restricted to the values given in the following list. Tolerances are not permitted.

dependant of the load current I_L and the max. operating voltage U_{Bmax} .

Information can be taken from the following list. The maximum surface temperature at maximum ambient temperature is given in the Ex identification of the apparatus.

28 °C

24 °C

23 °C

The sensor must not be mechanically damaged.

The connecting cable must not be disconnected under voltage!

Terminal connection: minimum conductor cross-section: 0.5 mm^2 , maximum conductor cross-section: 2.5 mm^2 .

The cable entry must be such, that no tension load or twist is applied to the cable

The protection category must be in accordance with EN 60529 and as stated in the data sheet. The cable entry must be designed so that there are no sharp edges to damage the cable and impair the level of protection of the sensor. The cable entry must be in accordance with the relevant European standard for industrial cable and lead entries. In addition, in the case of flexible leads, the points of entry of the cable must be rounded off over an angle of at least 75° , with a radius (R), which is at least one quarter of the maximum permissible cable diameter for the entry, but not greater than 3 mm.