




Model Number
UC500-F65-E8R2-V15

- Features**
- Level indication
 - 2 switch outputs
 - Program input
 - Programmable by means of Interface (see accessories) and SON-PROG
 - Synchronization options
 - Temperature compensation

Diagrams

Characteristic response curve

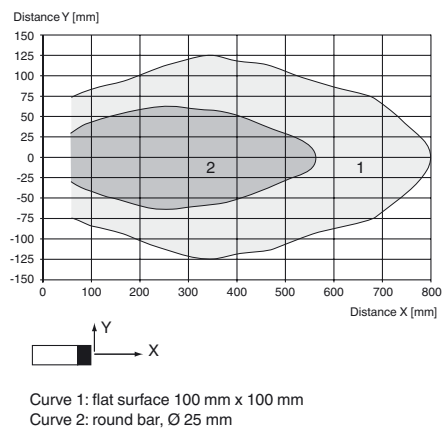

Release date: 2012-07-12 14:43 Date of issue: 2012-07-12 235136_eng.xml

Technical data

General specifications	
Sensing range	60 ... 500 mm
Adjustment range	60 ... 500 mm
Unusable area	0 ... 60 mm
Standard target plate	10 mm x 10 mm
Transducer frequency	approx. 300 kHz
Nominal ratings	
Time delay before availability t_v	250 ms
Limit data	
Permissible cable length	max. 300 m
Indicators/operating means	
LED green	Power on
LED yellow 1	solid: switching state switch output 1 flashing: misadjustment
LED yellow 2	solid: switching state switch output 2 flashing: misadjustment
Electrical specifications	
Rated operational voltage U_e	24 V DC
Operating voltage U_B	12 ... 30 V (including ripple) In supply voltage interval 12 ... 20 V reduced sensitivity by 20% ... 0%
Ripple	≤ 10 %
No-load supply current I_0	≤ 60 mA
Input	
Input type	1 program input Teach-In of S_{min}
Input voltage	≤ Operating voltage
Level	low level : 0 ... 3 V (Teach-IN active) high level : ≥ 15 V (Teach-IN inactive)
Pulse length	≥ 150 ms
Output	
Output type	2 switch outputs PNP, NO
Rated operational current I_e	150 mA , short-circuit/overload protected
Default setting	Switching distance "full", S_{max} : 80 mm Switching distance "empty", S_{min} : 450 mm Switching hysteresis "full", H_{Smax} : 20 mm Switching hysteresis "empty", H_{Smin} : 100 mm average value "full", M_{Smax} : 20 average value "empty", M_{Smin} : 110
Voltage drop U_d	≤ 3 V
Switch-on delay t_{on}	80 ms
Repeat accuracy	± 0.45 mm
Off-state current I_f	0.01 mA
Temperature influence	≤ ± 1.5 %
Ambient conditions	
Ambient temperature	-25 ... 70 °C (-13 ... 158 °F)
Storage temperature	-40 ... 85 °C (-40 ... 185 °F)
Shock resistance	30 g , 11 ms period
Vibration resistance	10 ... 55 Hz , Amplitude ± 1 mm
Mechanical specifications	
Connection type	Device connector M12 x 1 , 5-pin
Protection degree	IP65
Material	
Housing	PBT
Transducer	epoxy resin/hollow glass sphere mixture; polyurethane foam
Installation position	any position
Mass	500 g
Compliance with standards and directives	
Standard conformity	
Standards	EN 60947-5-2:2007 IEC 60947-5-2:2007

Approvals and certificates	
UL approval	cULus Listed, General Purpose
CSA approval	cCSAus Listed, General Purpose

Accessories

V15-G-2M-PUR

Cable socket, M12, 5-pin, PUR cable

V15-G-2M-PVC

Cable socket, M12, 5-pin, PVC cable

V15-W-2M-PUR

Cable socket, M12, 5-pin, PUR cable

V15-W-2M-PVC

Cable socket, M12, 5-pin, PVC cable

3RX4000-PF

PC interface

Applications

The design and functionality makes this sensor best suitable for level detection applications in small containers or tanks. The device provides 2 switching outputs Q1 (S_{min}) and Q2 (S_{max}). Special distances can be assigned to each of them - e. g. the minimum and maximum levels in a tank can be evaluated and displayed. The parameters can be programmed with SONPROG or with an automatic setup (Teach-In).

Mounting and Connection

All parts are accommodated in a fully enclosed housing. The ultrasonic transducer is set back in the housing, so it is protected. Because of the built-in sealing the sensor can be used as a closure with integrated level detection. The opening of the tank must have a diameter of 26 mm. The sensor is fixed by means of two M5 screws. The sensor has a 5 pin M12 x 1 connector. The BERO has built-in polarity reversal as well as short-circuit and overload protection. Where there is electrical interference, shielded cables are recommended.

Setup

The two ranges, the associated hysteresis and the average value are preset at the factory (see technical data). The parameters can be programmed with SONPROG or with an automatic setup (teach-in). Teach-in can be done by means of the keys of the interface (accessories) or the function input XI.

Automatic Setup (Teach-in)

With this function the minimum level S_{min} can be set. The following steps must be performed in the correct order:

1. Fill the tank up to the required minimum level or place an object at the required distance.
2. Apply "low" signal (0 to 3 V) to the function input XI - e.g. connect XI via a key to 0 V, or connect it via a PLC to "LOW". The LED " S_{min} " flashes, then. The sensor is disabled; it's learning the distance. The signal duration must be at least 150 ms.
3. Remove signal from XI - e.g. disconnect it from the function input XI, connect it to $+U_B$ or connect it via a PLC to "HIGH").

Important! As long as the function input XI is connected to "low", the sensor is disabled.

SONPROG

With SONPROG the following parameters can be programmed:

- Start or end of both switching ranges S_{min} and S_{max}
- Hysteresis (HS_{max} , HS_{min})
- Blind zone
- Sensing range
- Average value
- Switching output S_{min} NC / NO

Customer specific programming is available on request.

Operation

The level of liquid inside a tank is detected within the sensing range. If the level reaches one of the two switching levels (S_{min} , S_{max}), then the corresponding output will be set active. Both switching levels are equipped with a switching hysteresis (HS_{min} , HS_{max}). The switching status of each output is indicated by the corresponding yellow LED. If the filling level is in between the 2 switching levels, both of the outputs are in off state.

Objects inside the blind zone will cause error signals. Therefore the user has to mount the sensor that way that the level cannot be inside the blind zone.