


1756-OB16D with 1492-IFM40F-F24D-2

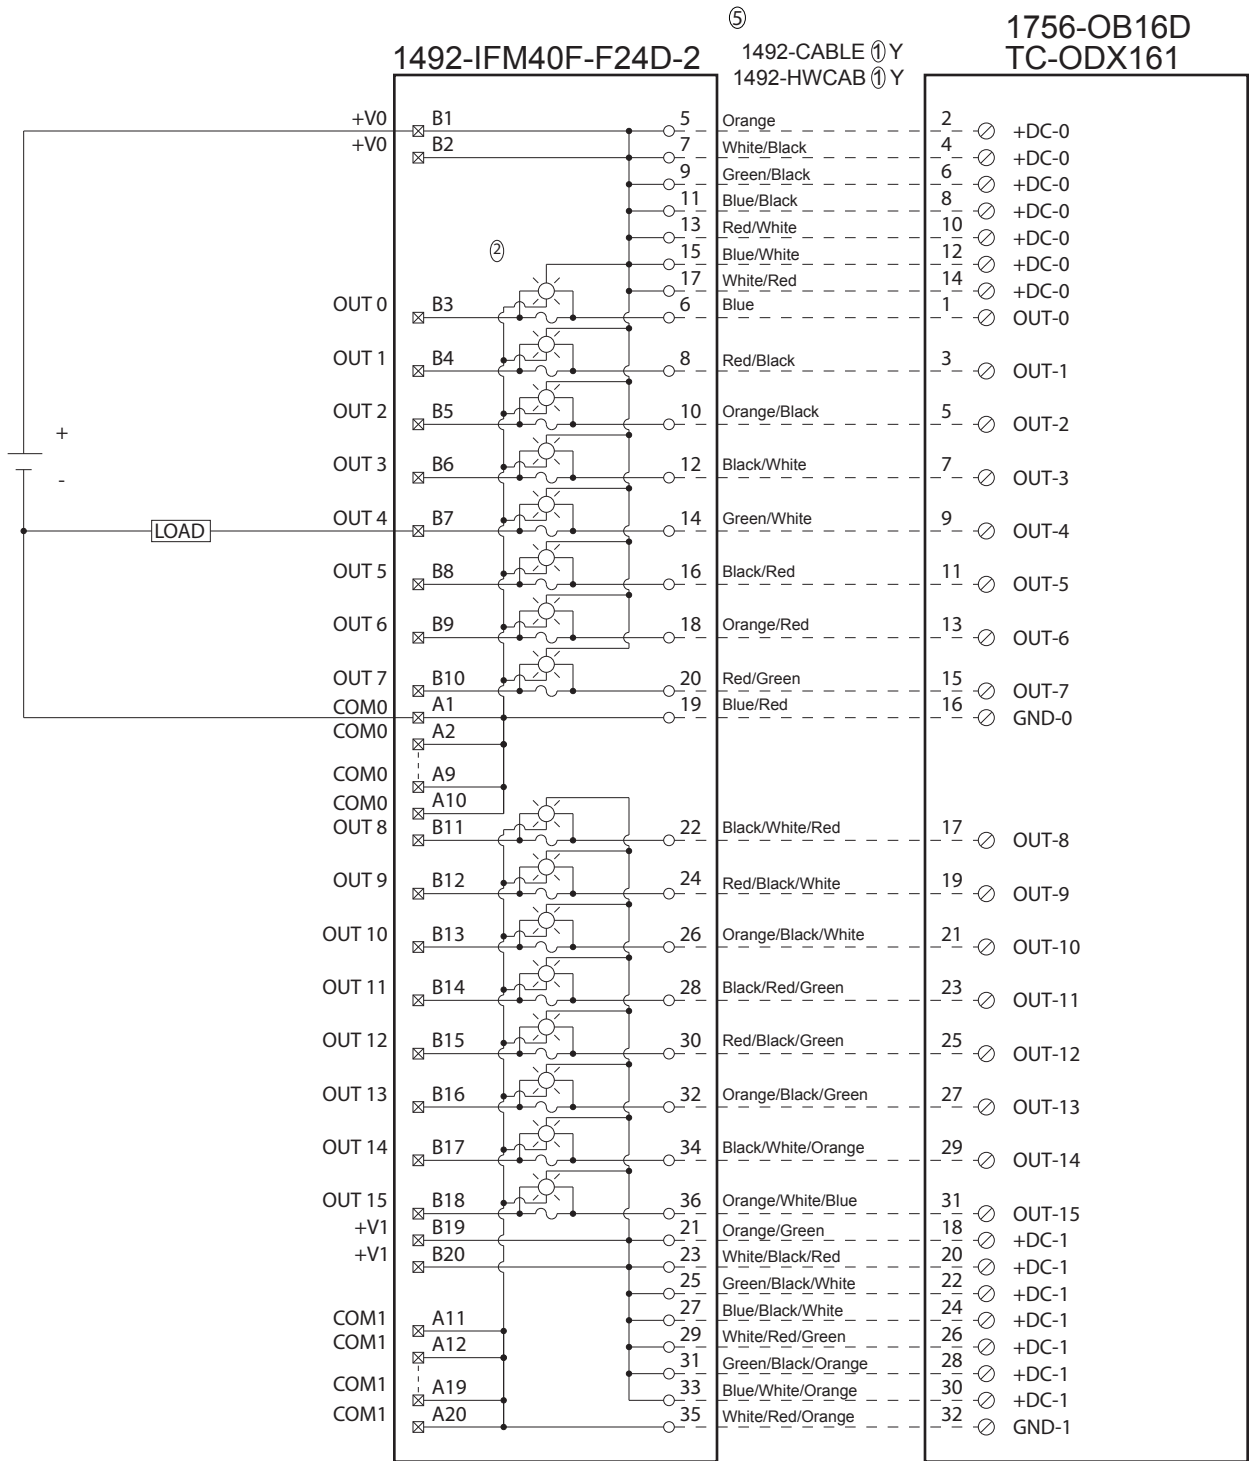

① Cables are available in 0.5m, 1.0m, 2.5m, and 5.0m standard lengths (005=0.5m, 010=1.0m, 025=2.5m, 050=5.0m). Custom length cables are also available.

② LED provides blown fuse indication.

③ Terminals starting with A are the lower row of terminals, B terminals are the upper row.

④ For operation from a single power source, connect +V0 and +V1 terminals together and connect COM0 and COM1 terminals together.

⑤ With this module & cable combination maximum IFM current ratings are as follows:

- 2 Amps per circuit
- 8 Amps per group (COM0, COM1)
- 8 Amps per module