


1756-IM16I with
1492-IFM40F-FS240A-4

1492-IFM40F-FS240A-4

1492-CABLE ① Y
1492-HWCAB ① Y

1756-IM16I
TC-IDW16I

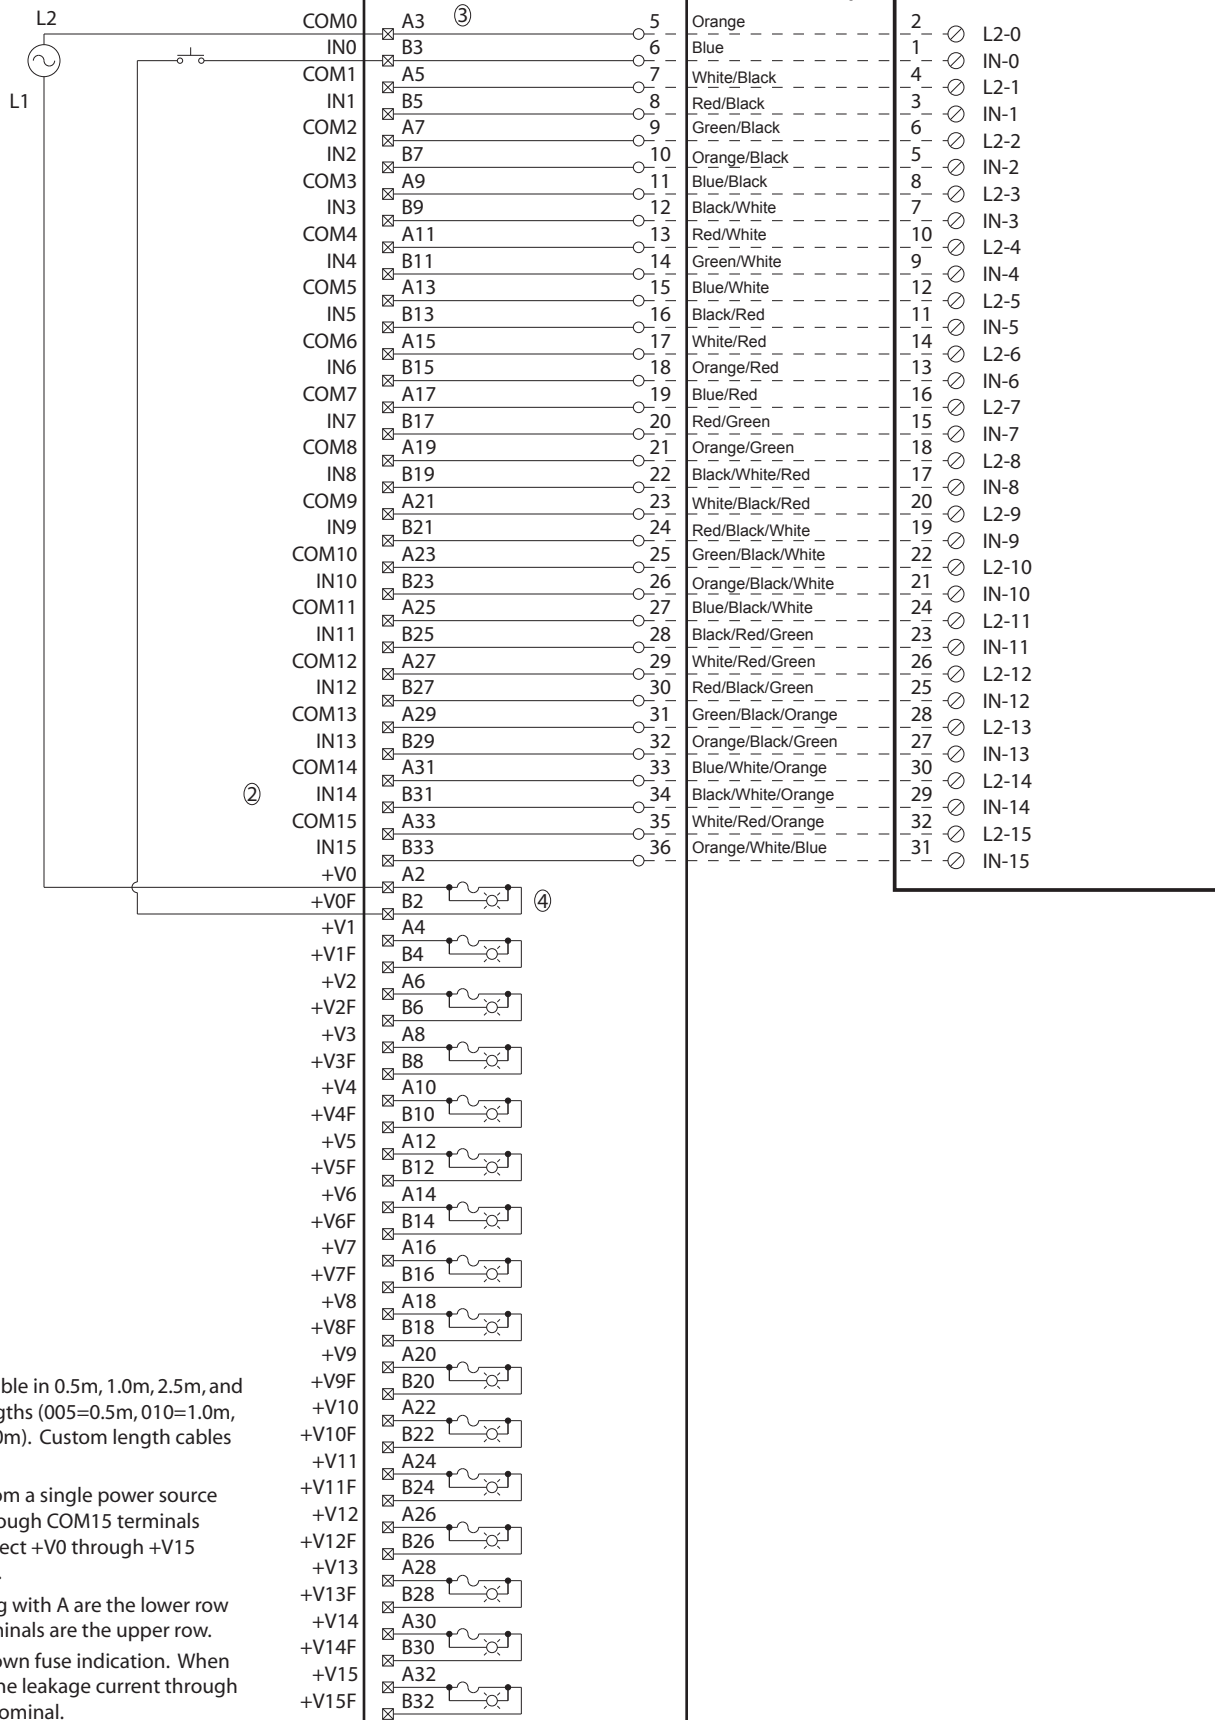

- ① Cables are available in 0.5m, 1.0m, 2.5m, and 5.0m standard lengths (005=0.5m, 010=1.0m, 025=2.5m, 050=5.0m). Custom length cables are also available.
- ② For operation from a single power source connect COM0 through COM15 terminals together and connect +V0 through +V15 terminals together.
- ③ Terminals starting with A are the lower row of terminals, B terminals are the upper row.
- ④ LED provides blown fuse indication. When the fuse is blown the leakage current through the LED is 1.4mA nominal.