



PHASE - NEUTRAL BACK EMF, ENCODER ABSOLUTE POSITION

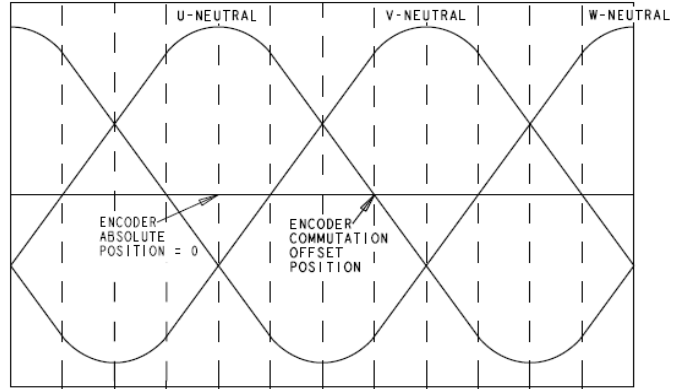

-30° 0° 30° 60° 90° 120° 150° 180° 210° 240° 270° 300° 330° ELECTRICAL DEGREES

SIN+, SIN-, COS+, COS- ENCODER OUTPUT WAVEFORMS

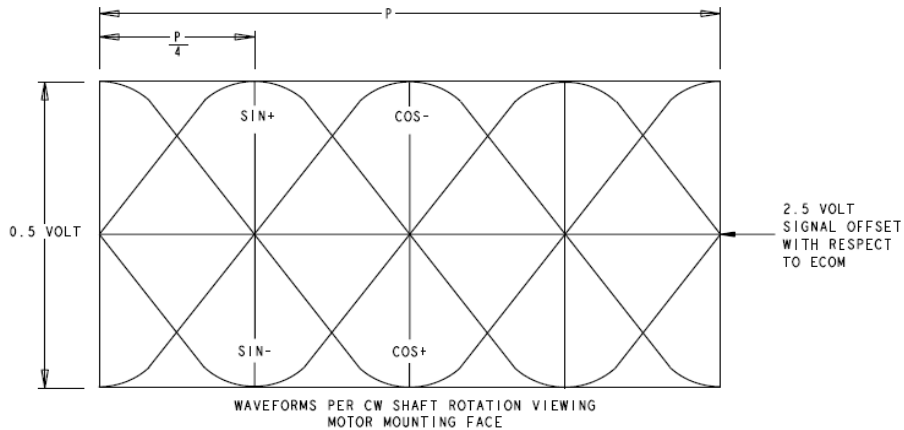

NOTES:



CONFIDENTIAL AND PROPRIETARY INFORMATION
 THIS DOCUMENT CONTAINS CONFIDENTIAL AND PROPRIETARY INFORMATION OF ROCKWELL AUTOMATION, INC. AND MAY NOT BE USED, COPIED OR DISCLOSED TO OTHERS, EXCEPT WITH THE AUTHORIZED WRITTEN PERMISSION OF ROCKWELL AUTOMATION, INC.

Engineering Specification Electrical

RDB-B29039-7B72AA

Dr. S. Johnson Date 10-13-09


| | | | |
|----------|------------|----|-----------|
| Sheet | 1 | of | 4 |
| Size | 1000065580 | | Ver |
| A | | | 00 |

General Specifications:

| | |
|---|--|
| 1. Motor type: 3 phase, wye winding, permanent magnet rotor, totally enclosed, non-ventilated. | |
| 2. Motor poles: | 38 |
| 3. Operating Speed, max: | 1000 RPM |
| 4. Base speed (max speed at peak torque), Ref, at 440 VAC RMS operating voltage: | 865 RPM |
| 5. Continuous stall torque, max, at max winding temperature in a 40C ambient: | 122 Nm (1080 lb-in) |
| 6. Winding temperature, max, in a 40C ambient: | 150 degrees C |
| 7. Continuous stall current, max: | 50.9 Amps 0 to peak |
| 8. Heatsink size, aluminum, attached to front mounting flange for continuous torque specifications: | 407 x 407 x 19.1mm (16 x 16 x 0.75 inch) |
| 9. Peak stall torque, max: | 318 Nm (2815 lb-in) |
| 10. Peak stall current, max: | 190 Amps 0 to peak |
| 11. Rated Speed (UL file and motor nameplate Rated RPM): | 800 RPM |
| 12. Continuous power rating, max: | 4.41 kW (5.91 hp) |
| 13. Speed at continuous power rating: | 578 RPM |
| 14. Continuous torque, max, at continuous power rating: | 73.0 Nm (646 lb-in) |
| 15. Continuous current, Ref, at continuous power rating: | 32.5 Amps 0 to peak |
| 16. Operating voltage, Ref (Not for direct connection to AC line): | 480 VAC RMS |
| 17. Insulation class: | 155C (Class F) |
| 18. Housing temperature, max: | 125C (257F) |
| 19. Ke, +/-10%, phase to phase at 25C +/- 5C: | 321 V/kRPM 0 to peak |
| 20. Kt (sine), Ref, at 25C +/- 5C: | 2.65 Nm/Amp (23.45 lb-in/Amp) 0 to peak |
| 21. Winding resistance, +/- 10%, phase to phase at 25C +/- 5C: | 0.171 ohms |
| 22. Winding inductance, Ref, phase to phase: | 1.76 mH |
| 23. Dielectric rating of motor power connections (U,V,W), to ground for 1 second: | 2352 VAC RMS 50/60 Hz |
| 24. Audible noise, Ref, at 1 meter distance: | 66 dbA |
| 25. Rotor inertia, +/- 10%: | 0.066 kg-m ² (0.58 lb-in-sec ²) |
| 26. Friction torque, Ref: | 4.1 Nm (36.3 lb-in) |
| 27. Cogging torque, Ref: | 2.37 Nm (21.0 lb-in) peak to peak |
| 28. Thermal resistance, Ref, winding to ambient: | 0.190 degrees C/watt |
| 29. Thermal time constant, Ref, winding to ambient: | 96 minutes |
| 30. Product weight, Ref: | 55.4 kg (122 lb) |
| 31. Shipping weight, Ref: | 62.6 kg (138 lb) |
| 32. Operating ambient temperature: | 0C to 40C (32F to 104F) |
| 33. Storage ambient temperature: | -30C to 70C (-22F to 158F) |

Notes:

- "Ref" denotes untoleranced specifications, provided for reference only.
- Speed, torque and current specifications are for operation with Allen Bradley drives.

| | | | | | |
|---|---|--------------------------------------|----------|----------------------------|------------------|
|  | CONFIDENTIAL AND PROPRIETARY INFORMATION | Engineering Specification Electrical | | Sheet 2 of 4 | |
| | THIS DOCUMENT CONTAINS CONFIDENTIAL AND PROPRIETARY INFORMATION OF ROCKWELL AUTOMATION, INC. AND MAY NOT BE USED, COPIED OR DISCLOSED TO OTHERS, EXCEPT WITH THE AUTHORIZED WRITTEN PERMISSION OF ROCKWELL AUTOMATION, INC. | RDB-B29039-7B72AA | | Size | 10000065580 |
| | Dr. S. Johnson | Date | 10-13-09 | A | Ver 00 |

General Specifications, continued:

- 34. Relative humidity, non-condensing: 5% to 95%
- 35. Liquid / dust protection: IP65
- 36. Shock, max, 6 msec duration: 20 g peak
- 37. Vibration, max, 30 to 2000 Hz: 2.5 g peak
- 38. Bearing arrangement: None internal to motor. Shaft is supported by customer's shaft / bearing system.
- 39. Shaft material: Steel
- 40. Paint color, gloss level, except rear cover: Black, 20 to 35 gloss units
- 41. Rear cover color (Pantone color code), painted or exposed material color: Cool gray # 5, 0 to 20 gloss units
- 42. Shaft, key (if provided), front mounting surface, and connectors are not painted.

Feedback Specifications:

- 1. Feedback interface type (encoder supplier proprietary), order designation: Endat, 2.2/01
- 2. SIN, COS waveform output signals/rev: 2048 sinusoids/rev
- 3. SIN, COS waveform amplitude, measured differentially from SIN+ to SIN-, or COS+ to COS-: 0.75 to 1.2 VAC peak to peak
- 4. SIN, COS voltage offset with respect to ECOM, +/- 0.5 VDC: 2.5 VDC
- 5. DATA+, DATA-, CLK+, CLK- signals applicable standard, signals type: RS 485, Synchronous
- 6. CLK+, CLK- clock frequency, Ref, when operating with Kinetix Endat adapter kit: 468.75 kHz
- 7. Communication hierarchy: Encoder is slave, communication is externally initiated.
- 8. Single turn absolute position value range: 0 to 8191 (13 bit)
- 9. Multiturn absolute shaft revolution value range: 0 to 4095 revolutions (12 bit)
- 10. Absolute position data: Binary, value increases with CW shaft rotation viewing motor mounting face.
- 11. Memory storage capacity available for Rockwell parameters, EEPROM, min: 64 words, 16 bits/word
- 12. EPWR 5V (encoder power) input voltage: 3.6 to 14 VDC
- 13. EPWR 5V continuous input current,max, at 5.0 VDC: TBD mADC
- 14. EPWR 5V inrush input current, max, when connected to Kinetix6000 drive: TBD ADC
- 15. TS+, TS- PTC Thermistor transition temperature, +/-5C: 160 degrees C
- 16. TS+, TS- PTC thermistor circuit resistance, Ref, at thermistor transition temperature: 1100 ohms
- 17. TS+, TS- PTC thermistor circuit resistance, Ref, at 25 C +/- 5C: 160 ohms
- 18. TS+, TS- PTC thermistor resistance vs temperature curves applicable standards: DIN 44081 / 44082
- 19. TS+, TS- PTC thermistor circuit configuration (number of thermistors): 2 in series

Notes:


- 1. "Ref" denotes untoleranced specifications, provided for reference only.

| | | | | | |
|---|---|--------------------------------------|----------|----------------------------|-------------|
|  | CONFIDENTIAL AND PROPRIETARY INFORMATION | Engineering Specification Electrical | | Sheet 3 of 4 | |
| | THIS DOCUMENT CONTAINS CONFIDENTIAL AND PROPRIETARY INFORMATION OF ROCKWELL AUTOMATION, INC. AND MAY NOT BE USED, COPIED OR DISCLOSED TO OTHERS, EXCEPT WITH THE AUTHORIZED WRITTEN PERMISSION OF ROCKWELL AUTOMATION, INC. | RDB-B29039-7B72AA | | Size | 10000065580 |
| | Dr. S. Johnson | Date | 10-13-09 | A | Ver 00 |

**RDB-B29039-7B72AA Performance with 2099-BM09S
at 480 and 400 VAC 3 phase Drive Input, 40C Motor Ambient**

| SPEED RPM | TORQUE | | | |
|--------------|--------|------------|------------|------------|
| | Tcont | Tpeak 480V | Tpeak 400V | Tpeak 150% |
| | Nm | Nm | Nm | Nm |
| 0 | 122 | 318 | 318 | #N/A |
| 175 | 119 | 318 | 318 | #N/A |
| 500 | 82.8 | 318 | 318 | #N/A |
| 783 | 47.1 | 318 | 318 | #N/A |
| 800 | 45 | 318 | 312 | #N/A |
| 946 | 12.2 | 318 | 259 | #N/A |
| 1000 | 0 | 302 | 240 | #N/A |
| 1000 | #N/A | 0 | #N/A | #N/A |
| #N/A | #N/A | #N/A | #N/A | #N/A |
| #N/A | #N/A | #N/A | #N/A | #N/A |
| #N/A | #N/A | #N/A | #N/A | #N/A |
| #N/A | #N/A | #N/A | #N/A | #N/A |

| SPEED RPM | TORQUE | | | |
|--------------|--------|------------|------------|------------|
| | Tcont | Tpeak 480V | Tpeak 400V | Tpeak 150% |
| | lb-in | lb-in | lb-in | lb-in |
| 0 | 1080 | 2815 | 2815 | #N/A |
| 175 | 1053 | 2815 | 2815 | #N/A |
| 500 | 733 | 2815 | 2815 | #N/A |
| 783 | 417 | 2815 | 2815 | #N/A |
| 800 | 398 | 2815 | 2761 | #N/A |
| 946 | 108 | 2815 | 2293 | #N/A |
| 1000 | 0 | 2673 | 2124 | #N/A |
| 1000 | #N/A | 0 | #N/A | #N/A |
| #N/A | #N/A | #N/A | #N/A | #N/A |
| #N/A | #N/A | #N/A | #N/A | #N/A |
| #N/A | #N/A | #N/A | #N/A | #N/A |
| #N/A | #N/A | #N/A | #N/A | #N/A |

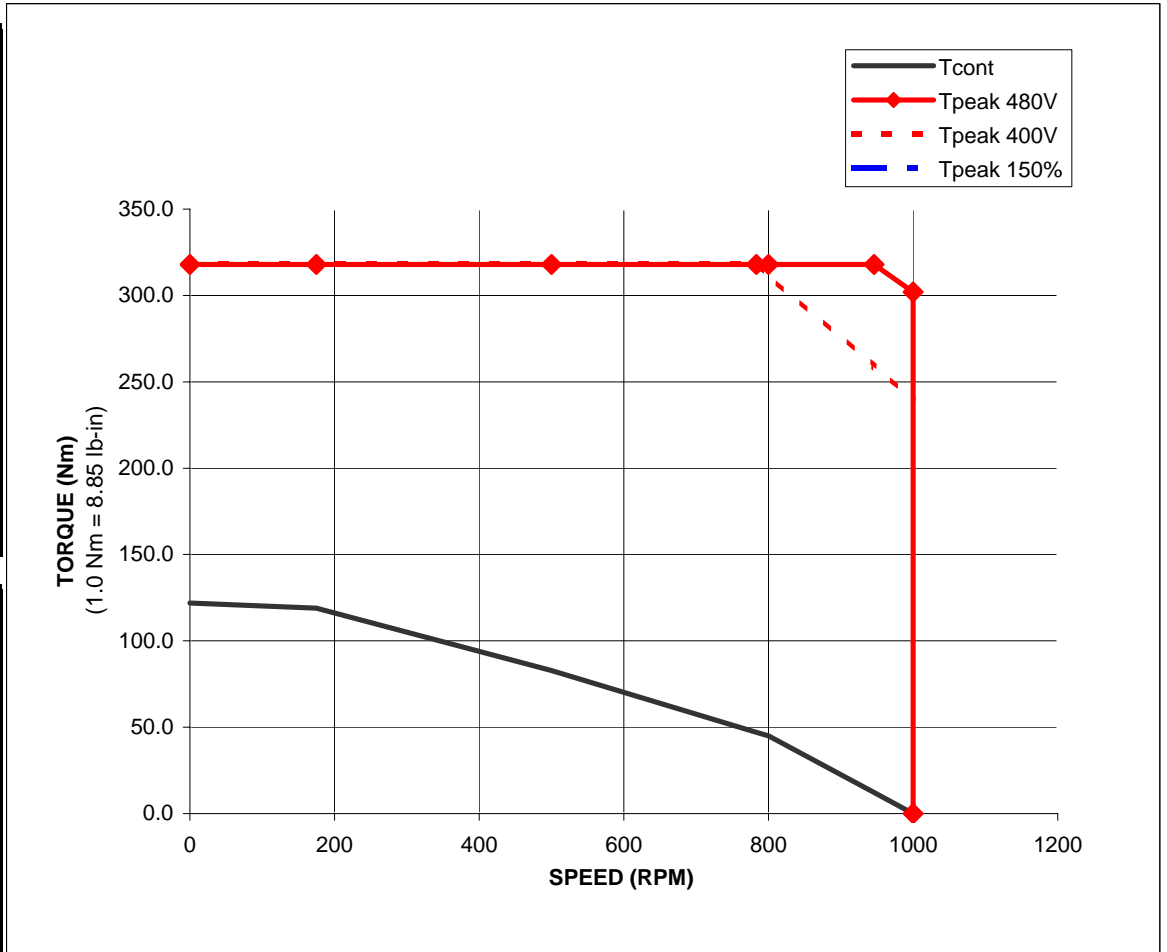

Notes:

1. Nm torque values shown are converted from tested lb-in data.
2. "Tpeak 150%" line shown applies when the drive peak current limit is set to 150% of the drive continuous current rating.