

Pressure gauge cock


male / female (swivel nut) female / female (swivel nut)

9.36

01/09

Туре	Connection thread	PN	Material	Part no.	Remarks
hex. 27	G 1/2	25	brass	N003.19.000	
hex. 27	G 1/2	25	brass	N003.14.000	with test flange 60 x 25 x 10 mm
hex. 27	G 1/2	25	brass	S003.22.000	
82 hex. 27	G 1/2	25	brass	S003.18.000	with test flange 60 x 25 x 10 mm

The operating positions are engraved on the plug:

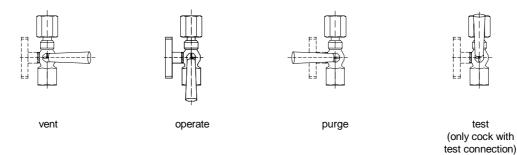

- Range of application:

For liquids, gas or steam, from - 10°C up to + 50°C For pressure gauges with sealing washer according to DIN EN 837-1

- Plastic handle