

## Pressure gauge cock with gland


## female / female and male / female

9.38

01/09

| Туре    | Connection thread | PN | Material | Part no.       | Remarks                             |
|---------|-------------------|----|----------|----------------|-------------------------------------|
| hex. 27 | G 1/2             | 25 | brass    | N003.09.000    |                                     |
| hex. 27 | G 1/2             | 25 | brass    | N003.09.070.01 | with test flange<br>60 x 25 x 10 mm |
| hex. 27 | G 1/2             | 25 | brass    | N003.10.000    |                                     |

The operating positions are engraved on the plug:

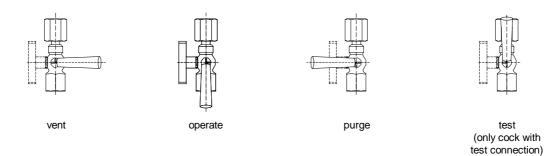

## - Range of application:

For liquids, gas or steam, from  $\,$  -  $10^{\circ}\text{C}$  up to +  $50^{\circ}\text{C}$  For pressure gauges with sealing washer according to DIN EN 837-1

- Plastic handle