


## Low-pressure multi-way cock PN 25 DN 5

## for direct mounting according to DIN EN 61518<sup>1)</sup> test connections with quick couplings

5.25

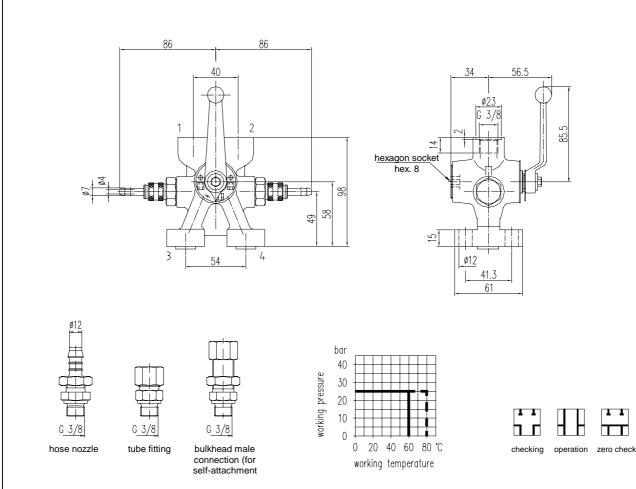

## MOUNTING ACCESSORIES see section 8

Connections			
Inlet 1 - 2	Test 3 - 4	Outlet	Part no.
G 3/8 female thread according to DIN 3852	quick coupling with hose nozzle connection	DIN EN 61518 Type A	S345.06.070.04
tube fitting O. D. 12 mm, line L			S345.06.071.04
bulkhead male connector O. D. 12 mm, line L			S345.06.072.04
hose nozzle for tube I. D. 12 mm, line L			\$345.06.074.04

Components	DIN - Material Number	
Body	brass	
Plug	1.4301	
Indicating dial	1.4301	
Pressure srew	brass	
Insert ring	stainless steel	
Hose nozzle and automatic- locking quick coupling	brass	
Tube fitting and bulkhead male connection	steel (can also be delivered in stainless steel)	
Plug seal	PTFE	
Ball handle	black anodized aluminium	

- Body: pressed part
- Special types are available
- 1) Dimensions acc. to DIN EN 61518 see order instruction B 4