



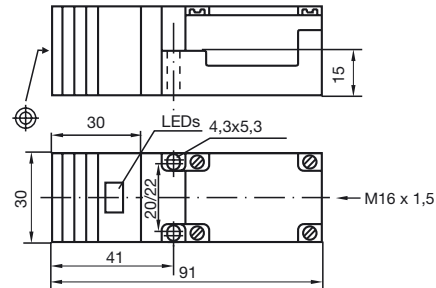

CE

**Model Number**

NCN15-M1K-Z0

**Connection****Dimensions****Technical Data****General specifications**

Switching element function	DC	Make function
Rated operating distance	$s_n$	15 mm
Installation		not embeddable
Assured operating distance	$s_a$	0 ... 12.15 mm
Reduction factor $r_{Al}$		0.38
Reduction factor $r_{Cu}$		0.36
Reduction factor $r_{V2A}$		0.7

**Nominal ratings**

Operating voltage	$U_B$	5 ... 60 V
Switching frequency	$f$	0 ... 150 Hz
Hysteresis	$H$	1 ... 10 typ. 4 %
Reverse polarity protection		tolerant
Short-circuit protection		pulsing
Voltage drop	$U_d$	$\leq 5$ V
Operating current	$I_L$	2 ... 200 mA
Off-state current	$I_r$	0 ... 1 mA typ. 0.7 mA
Indication of the switching state		LED, yellow
Pre-fault indication		LED, red

**Standard conformity**

Standards	IEC / EN 60947-5-2:2004
-----------	-------------------------

**Ambient conditions**

Ambient temperature	-25 ... 70 °C (248 ... 343 K)
Storage temperature	-40 ... 90 °C (233 ... 363 K)

**Mechanical specifications**

Connection type	terminal compartment
Core cross-section	up to 2.5 mm <sup>2</sup>
Housing material	PBT
Sensing face	PBT
Protection degree	IP67