



### Model Number

**LCE 18-1,1-2,0-K14**

Glass fiber optic - thru-beam with PVC covering

### Features

- M8 x 1 thread

### Description

#### Attention:

Fiber optics must not be twisted or kinked. Excessive tensile loads will lead to destruction. Contact with petrol or organic solvents must be prevented.



### Technical data

#### General specifications

Fiber optic length	l	2000 mm
Fiber optic diameter	d	3 mm
Adapter form		18
End piece		Bendable tip
Bending radius		min. 10 mm
Fiber bundle diameter		1.1 mm
Approvals		CE


#### Ambient conditions

Ambient temperature		-20 ... 85 °C (-4 ... 185 °F) [Adapter]
		-20 ... 85 °C (-4 ... 185 °F) [End head and Covering]
Storage temperature		-20 ... 85 °C (-4 ... 185 °F)

#### Mechanical specifications

Protection degree		IP65
Material		
Optical face		glass
Sheathing		PVC
Core		Glass fiber
End piece		stainless steel 1.4301
Adapter		PBT
Extraction force		100 N

### Dimensions

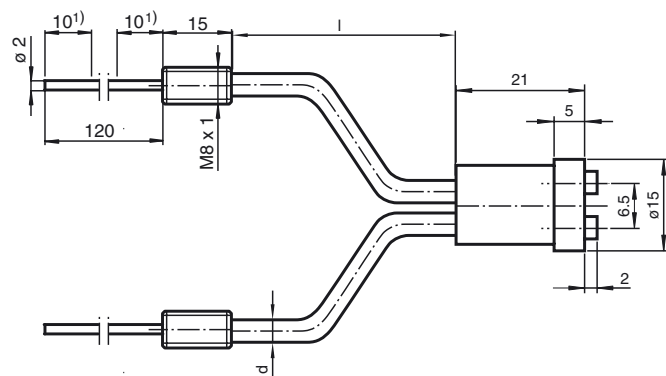

1) Bend-free zone, bending radius > 10 mm