




### Model Number

NJ2-6,5-50-E

### Features

- Comfort series
- 2 mm not embeddable


### Connection



### Accessories

**BF 6,5**  
Mounting flange

### Dimensions

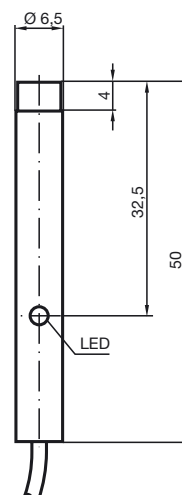

### Technical Data

#### General specifications

Switching element function		NPN Make function
Rated operating distance	$s_n$	2 mm
Installation		not embeddable
Output polarity		DC
Assured operating distance	$s_a$	0 ... 1.62 mm
Reduction factor $r_{Al}$		0.42
Reduction factor $r_{Cu}$		0.4
Reduction factor $r_{V2A}$		0.77

#### Nominal ratings

Operating voltage	$U_B$	10 ... 60 V
Switching frequency	$f$	0 ... 3000 Hz
Hysteresis	$H$	1 ... 15 typ. 5 %
Reverse polarity protection		protected against reverse polarity
Short-circuit protection		pulsing
Voltage drop	$U_d$	$\leq 2.6$ V
Operating current	$I_L$	0 ... 100 mA
Off-state current	$I_r$	0 ... 0.5 mA typ. 0.01 mA
No-load supply current	$I_0$	$\leq 10$ mA
Indication of the switching state		LED, yellow

#### Standard conformity

Standards	IEC / EN 60947-5-2:2004
-----------	-------------------------

#### Ambient conditions

Ambient temperature	-25 ... 70 °C (248 ... 343 K)
Storage temperature	-40 ... 85 °C (233 ... 358 K)

#### Mechanical specifications

Connection type	2 m, PUR cable
Core cross-section	0.14 mm <sup>2</sup>
Housing material	Stainless steel
Sensing face	PBT
Protection degree	IP67

#### Approvals and certificates

CCC approval	Certified by China Compulsory Certification (CCC)
--------------	---