




**Model Number**

NJ2-6,5-40-E2-V3

**Features**

- Comfort series
- 2 mm not embeddable

**Connection**




**Pinout**



Wire colors in accordance with EN 60947-5-2

1	BN
3	BU
4	BK

**Dimensions**

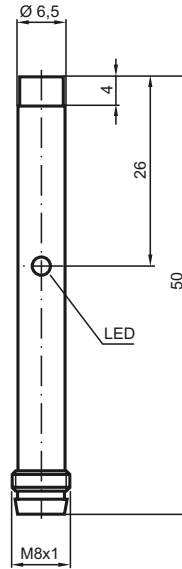

**Technical Data**

**General specifications**

Switching element function	PNP	Make function
Rated operating distance	$s_n$	2 mm
Installation		not embeddable
Output polarity		DC
Assured operating distance	$s_a$	0 ... 1.62 mm
Reduction factor $r_{Al}$		0.4
Reduction factor $r_{Cu}$		0.35
Reduction factor $r_{V2A}$		0.7

**Nominal ratings**

Operating voltage	$U_B$	10 ... 60 V
Switching frequency	$f$	0 ... 400 Hz
Reverse polarity protection		protected against reverse polarity
Short-circuit protection		pulsing
Voltage drop	$U_d$	$\leq 3$ V
Operating current	$I_L$	0 ... 100 mA
No-load supply current	$I_0$	$\leq 15$ mA
Indication of the switching state		-

**Standard conformity**

Standards	IEC / EN 60947-5-2:2004
-----------	-------------------------

**Ambient conditions**

Ambient temperature	-25 ... 70 °C (248 ... 343 K)
---------------------	-------------------------------

**Mechanical specifications**

Connection type	V3-connector
Core cross-section	-
Housing material	Stainless steel
Sensing face	PBT
Protection degree	IP67

Release date: 2009-12-03 15:41 Date of issue: 2009-12-03 035605\_ENG.xml