




Dimensions

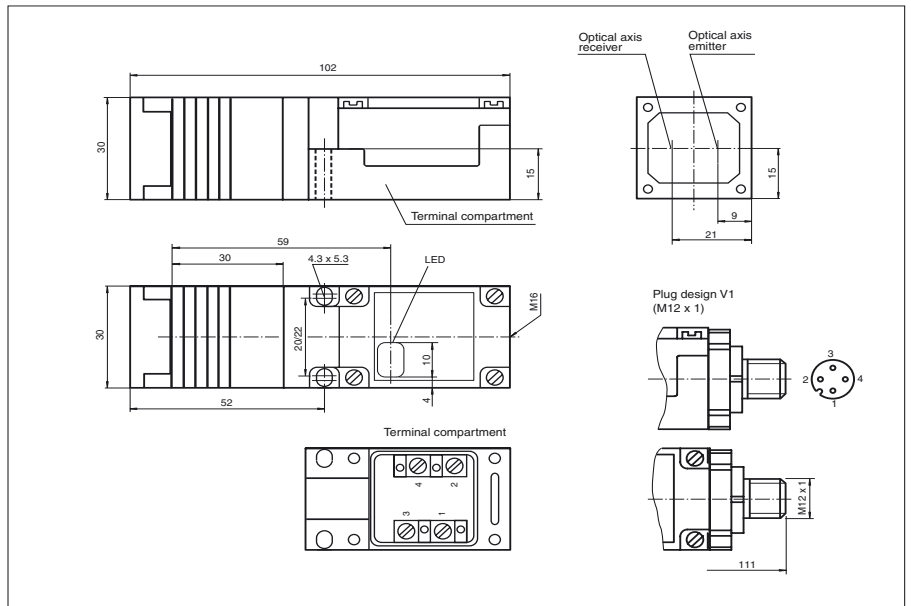

Model Number


OCS3000-M1A-B3

with terminal compartment

Features

- Light/dark ON parameterisable
- AS-Interface certificate
- Visible red light
- Glare protected with polarisation filter
- Pre-fault indication (dynamic, static)
- Protected against mutual interference
- Position of the sensor head adjustable

Electrical connection



- = Light on
- = Dark on

Release date: 2007-08-15 16:30 Date of issue: 2007-08-15 036959_ENG.xml

Technical data**General specifications**

Effective detection range	0 ... 3000 mm
Reflector distance	200 ... 3000 mm
Threshold detection range	6 m
Light source	LED
Approvals	CE
Reference target	reflector C110-2
Light type	red, modulated light
Ambient light limit	10000 Lux

Indicators/operating means

Operating display	LED green
Function display	LED yellow: switching state LED red: stability control (flashing)

Electrical specifications

Operating voltage	via AS-Interface network
Ripple	10 %
No-load supply current	$I_0 \leq 40 \text{ mA}$
Time delay before availability	$t_v \leq 20 \text{ ms}$

Output

Output of the pre-fault indication	data bit D1 (not at 1.5 kHz)
Switching type	Light/dark ON, switchable
Signal output	AS-Interface
Switching frequency	$f \leq 1.5 \text{ kHz} / 200 \text{ Hz}$ parameterisable with ULTRA 2001
Response time	$\leq 0.3 \text{ ms}$ at 1.5 kHz, $\leq 2.5 \text{ ms}$ at 200 Hz
Timer function	pulse extension 20 ms, configurable

Standard conformity

Standards	EN 60947-5-2
-----------	--------------

Ambient conditions

Ambient temperature	-25 ... 70 °C (248 ... 343 K)
Storage temperature	-40 ... 80 °C (233 ... 353 K)

Mechanical specifications

Protection degree	IP67
Connection	terminal compartment M16, core cross-section $\leq 2,5 \text{ mm}^2$
Material	
Housing	PBT
Optical face	Scratch resistant mineral glass lens
Mass	100 g

