




Model Number

NBN3-F25F-E8-Y41365


Features

- Satisfies machinery directive
- For installation in housing

Connection



Dimensions

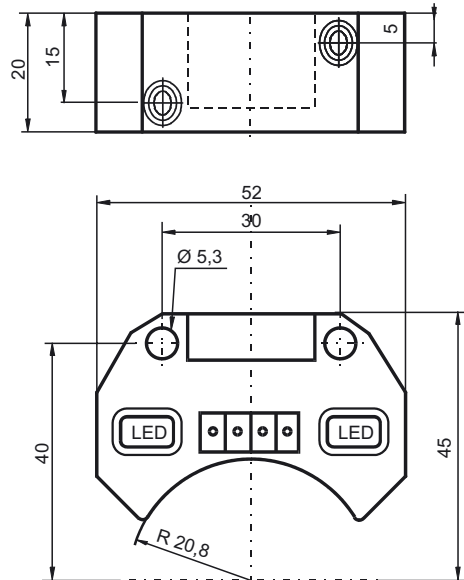

Technical Data

General specifications

Switching element function	PNP	Dual NO
Rated operating distance	s_n	3 mm
Installation	not embeddable	
Output polarity	switched high	
Assured operating distance	s_a	0 ... 2.43 mm
Reduction factor r_{Al}	0.5	
Reduction factor r_{Cu}	0.4	
Reduction factor r_{V2A}	1	

Nominal ratings

Operating voltage	U_B	10 ... 30 V
Switching frequency	f	0 ... 500 Hz
Hysteresis	H	typ. 5 %
Reverse polarity protected	reverse polarity protected	
Short-circuit protection	pulsing	
Voltage drop	U_d	≤ 3 V
Operating current	I_L	0 ... 200 mA
Off-state current	I_r	0 ... 0.5 mA typ. 0.1 μ A at 25 °C
No-load supply current	I_0	≤ 25 mA
Operating voltage display	LED, green	
Indication of the switching state	LED, yellow	

Ambient conditions

Ambient temperature	-25 ... 70 °C (-13 ... 158 °F)
Storage temperature	-40 ... 85 °C (-40 ... 185 °F)

Mechanical specifications

Connection type	MINI-COMBICON
Housing material	PBT
Sensing face	PBT
Protection degree	IP20
Note	Please use Phoenix FK-MCP 1,5/4-ST-3,81 connector

Compliance with standards and directives

Standard conformity	
Standards	EN 60947-5-2:2007 IEC 60947-5-2:2007

Approvals and certificates

UL approval	cULus Listed, General Purpose
CSA approval	cCSAus Listed, General Purpose