


Dimensions

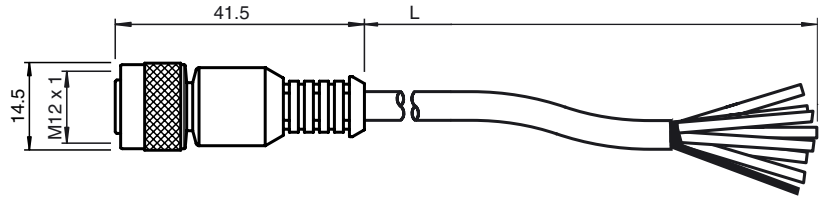

Model number

V17-G-2M-PUR

Cable socket, M12, 8-pin, shielded, PUR cable

Features

- Immunity to vibration, with mechanical latching
- Shield applied to Pin 8
- Gold plated contacts
- Halogen-free

Technical data

General specifications

Number of poles	7 + 1 x screen
Connection 1	Connector, female
Construction type 1	straight
Threading 1	M12
Connection 2	free cable end

Electrical specifications

Operating voltage	max. 300 V DC
Test voltage	> 800 V <sub>eff</sub> AC
Operating current	max. 2 A
Volume resistance	< 3 mΩ, Contact resistance 53 Ω/km


Ambient conditions

Ambient temperature	Cable, moving: -5 to 70 °C (268 to 343 K), Cable, fixed: -25 to 70 °C (248 to 343 K)
Degree of soiling	3

Mechanical specifications

Protection degree	IP67
Material	
Contacts	CuSn
Contact surface	Au
Handle	PUR
Cable	PUR
Slotted nut	CuZn, nickel-plated
Core isolation	PP
Cable	fine-strand, flexible
Sheath diameter	Ø 6 mm
Bend radius	Cable, moving: 60 mm, Cable, fixed: 30 mm
Colour	black
Cores	7 x 0.25 mm <sup>2</sup>
Conductor construction	19 x 0.13 mm Ø
Shield	Braid
Length	L 2 m

Electrical connection 1



Electrical connection 2

