


Comfort series
10 mm slot width



Switching element function	PNP	Make function
Slot width	5 mm	
Depth of immersion (lateral)	8 ... 10 typ.	
Installation		
Operating voltage U_B	10 ... 30 V	
Switching frequency f	0 ... 1500 Hz	
Reverse polarity protection	yes	
Short circuit protection	pulsing	
Voltage drop U_d	≤ 3 V	
Operating current I_L	0 ... 100 mA	
No-load supply current I_0	≤ 15 mA	
Indication of the switching state	LED, yellow	
EMC in accordance with	EN 60947-5-2	
Ambient temperature	-25 ... 70 °C (248 ... 343 K)	
Connection type	2 m, PVC cable	
Core cross-section	3 x 0.34	
Housing material	PBT	
Protection degree	IP67	

Connection_type:

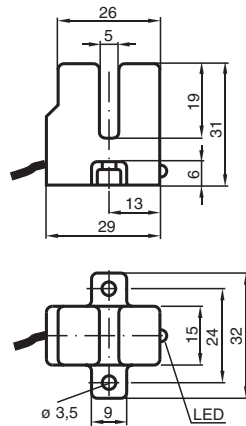