




**Model Number**

NBB3-V3-Z4


**Features**

- 3 mm flush
- 2-wire DC

**Connection**



**Dimensions**

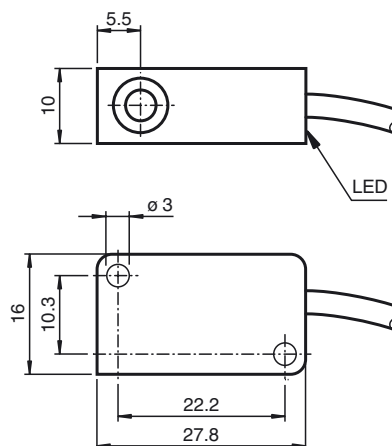

**Technical Data**

**General specifications**

Switching element function		DC	NO
Rated operating distance	$s_n$	3 mm	
Installation		flush	
Output polarity		DC	
Assured operating distance	$s_a$	0 ... 2.4 mm	
Reduction factor $r_{AI}$		0.4	
Reduction factor $r_{Cu}$		0.3	
Reduction factor $r_{304}$		0.8	

**Nominal ratings**

Operating voltage	$U_B$	5 ... 60 V DC
Switching frequency	$f$	0 ... 2000 Hz
Hysteresis	$H$	typ. 0.2 mm
Reverse polarity protected		reverse polarity protected
Voltage drop	$U_d$	$\leq 5$ V
Operating current	$I_L$	4 ... 100 mA
Lowest operating current	$I_m$	4 mA
Off-state current	$I_r$	0 ... 1 mA typ. 0.7 mA
Indication of the switching state		LED, yellow

**Limit data**

Tightening torque, fastening screws	0.4 Nm
-------------------------------------	--------

**Functional safety related parameters**

MTTF <sub>d</sub>	1780 a
Mission Time (T <sub>M</sub> )	20 a
Diagnostic Coverage (DC)	0 %

**Ambient conditions**

Ambient temperature	-25 ... 85 °C (-13 ... 185 °F)
---------------------	--------------------------------

**Mechanical specifications**

Connection type	cable PVC , 130 mm
Core cross-section	0.14 mm <sup>2</sup>
Housing material	PBT
Sensing face	PBT
Protection degree	IP67

**Compliance with standards and directives**

Standard conformity	
Standards	EN 60947-5-2:2007 IEC 60947-5-2:2007

**Approvals and certificates**

UL approval	cULus Listed, General Purpose
CSA approval	cCSAus Listed, General Purpose
CCC approval	Certified by China Compulsory Certification (CCC)

Release date: 2012-05-31 11:58 Date of issue: 2012-05-31 087484\_eng.xml