



**Model Number**


**OBT500-18GM60-E5**

Diffuse mode sensor  
with 2 m fixed cable


**Features**

- Dual color indication LED
- High switching frequency
- Light/dark ON, programmable
- Protection degree IP67
- Strong metallic housing in cylindrical shape M18 x 1

**Dimensions**



**Electrical connection**

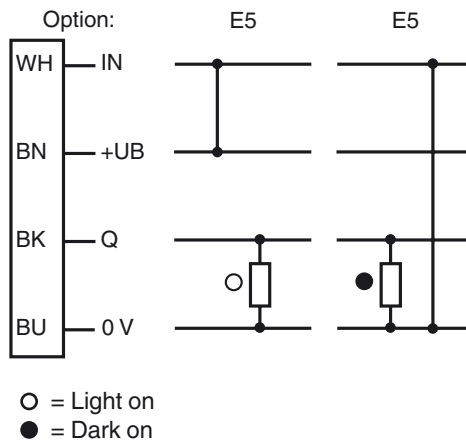

Release date: 2011-08-25 10:11 Date of issue: 2011-08-25 087796\_eng.xml

## Technical data

### General specifications

Detection range	0 ... 500 mm
Reference target	standard white 200 mm x 200 mm
Light source	IRET , 880 nm
Light type	infrared
Approvals	CE, cULus Listed 57M3 (Only in association with UL Class 2 power supply; Type 1 enclosure)
Diameter of the light spot	approx. 80 mm at 500 mm
Ambient light limit	10000 Lux

### Indicators/operating means

Operating display	LED green
Function display	Dual color-LED, yellow/green yellow: switching state green: power on flashing: stability control
Controls	Detection range adjuster

### Electrical specifications

Operating voltage	$U_B$	10 ... 30 V DC , class 2
Ripple		10 %
No-load supply current	$I_0$	≤ 25 mA
Time delay before availability	$t_v$	≤ 25 ms

### Output

Switching type	light/dark on electrically switchable	
Signal output	1 PNP output, short-circuit protected, protected from reverse polarity, open collector	
Switching voltage	max. 30 V DC	
Switching current	max. 100 mA	
Voltage drop	$U_d$	≤ 2.5 V
Switching frequency	$f$	≤ 500 Hz
Response time		≤ 1 ms

### Standard conformity

Standards	EN 60947-5-2
Standards 2	UL 508

### Ambient conditions

Ambient temperature	-25 ... 55 °C (-13 ... 131 °F)
Storage temperature	-40 ... 70 °C (-40 ... 158 °F)


### Mechanical specifications



Protection degree	IP67
Connection	2 m fixed cable
Material	
Housing	brass, nickel-plated
Optical face	PC
Mass	110 g

### Approvals and certificates

CCC approval	Products with a maximum operating voltage of ≤36 V do not bear a CCC marking because they do not require approval.
--------------	--

## Curves/Diagrams

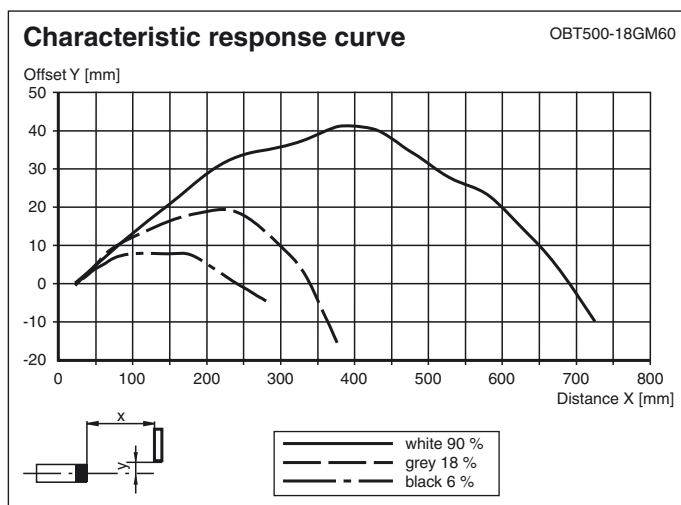

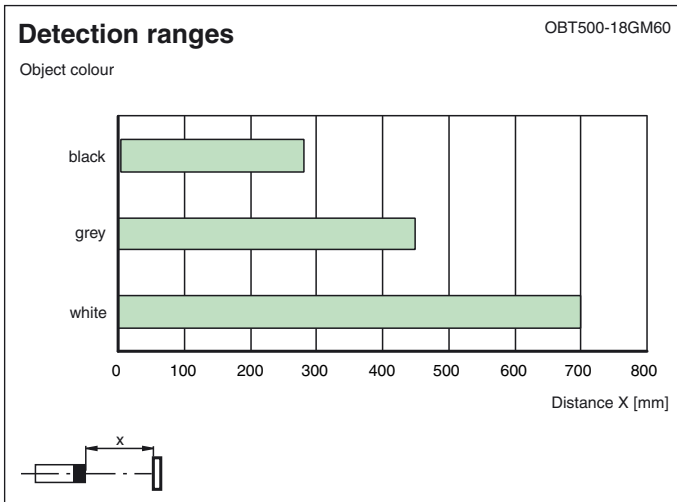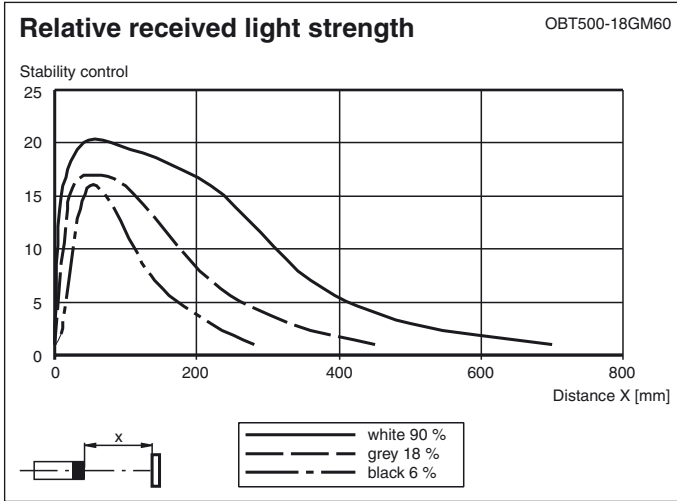

Release date: 2011-08-25 10:11 Date of issue: 2011-08-25 08:7796\_eng.xml