



Model Number

MVI-F57-2HB12

Evaluation unit with ethernet interface

Features

- TCP/IP protocol over ethernet
- 2 read/write heads connectable
- LEDs as function indicators
- Four line display


Function

The control interface unit MVI-F57-2HB12 with TCP/IP protocol connects the IDENT-M System V directly to the Ethernet. The device consists of a control interface unit MVI-D2-2HRX and a IPC.

2 read/write heads are connectable to the MVI-D2-2HRX.


The IPC is connected to the Ethernet. So the identification system is operated as a TCP/IP participant in the Ethernet and provides the full read/write functionality.

Dimensions

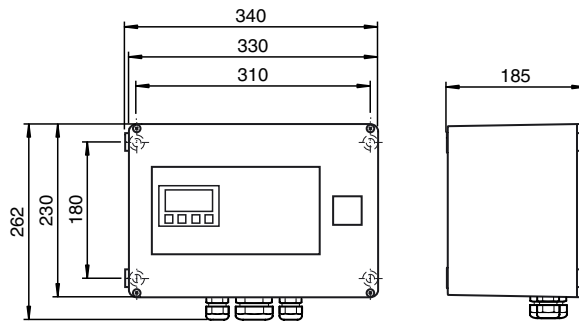

Electrical connection

Terminal configuration see manual

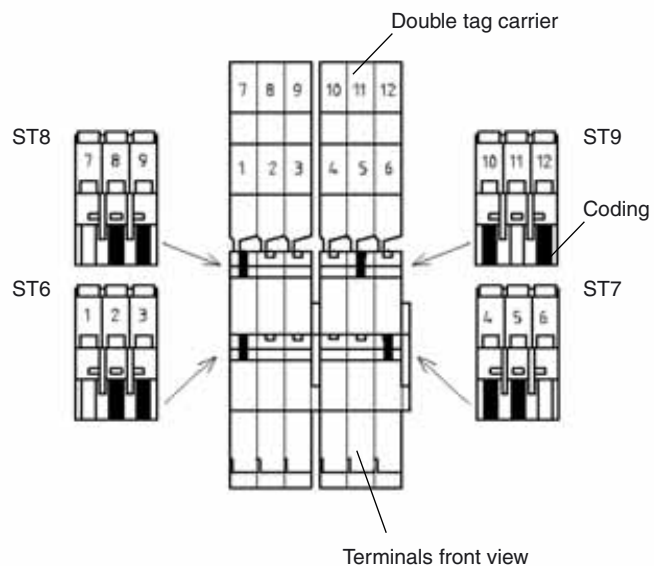

Technical data

General specifications

Number of read/Write heads max. 2

Indicators/operating means

Display 4 line LC display with 4 function keys for adjusting the ip address

Electrical specifications

Rated operational voltage U_e 24 V DC \pm 10 % or 100 V ... 250 V AC
Current consumption 1 A at 24 V DC, 200 mA at 230 V AC

Interface

Physical Ethernet
Protocol TCP/IP

Input

Input type 1 trigger input per read/write head, electrically isolated

Ambient conditions

Ambient temperature 0 ... 45 °C (273 ... 318 K)
Storage temperature -20 ... 70 °C (253 ... 343 K)
Climatic conditions max. 90 % Humidity

Mechanical specifications

Protection degree IP65



Connection	2 units MVH500-F15 or MVH2000-F15 via special PG cable gland
Material	aluminium; makrolon window
Mass	approx. 6900 g

Release date: 2009-05-14 11:21 Date of issue: 2009-05-14 108068_ENG.xml