


Dimensions

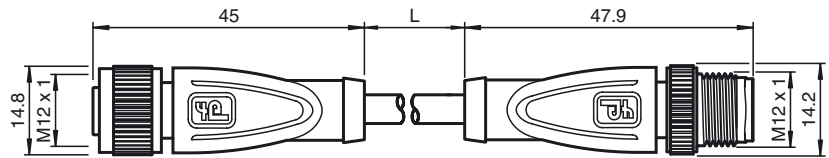

Model Number

V15-G-1,5M-PUR S/PE-V15-G

Connection cable, M12, 4-pin+PE, irradiated PUR cable

Features

- Knurled nut suitable for tool assembly
- Immunity to vibration, with mechanical latching
- Gold-plated and machined contacts
- Halogen-free
- Flexible sheathing
- Processing unit on pin 5
- Protection degree IP67 / IP68 / IP69K
- Suitable for 2-, 3- and 4-wire technology

Technical data

General specifications

Number of pins	4 + PE
Connection 1	female connector
Construction type 1	straight
Threading 1	M12
Connection 2	Male connector
Construction type 2	straight
Threading 2	M12

Electrical specifications

Operating voltage	U _B	max. 60 V DC
Test voltage		> 1500 V _{eff} AC
Operating current		max. 4 A
Volume resistance		< 5 mΩ


Ambient conditions

Ambient temperature	-40 ... 105 °C (-40 ... 221 °F)
Pollution Degree	3

Mechanical specifications

Contact elements	spring-loaded contact socket
Pin diameter	1 mm
Protection degree	IP67 / IP68 / IP69k
Material	
Contacts	CuSn / Au
Contact surface	Au
Body	TPU, green
Cable	PUR, irradiated
Slotted nut	Diecast zinc
Sleeve connector	Diecast zinc
Core insulation	PVC
Cable	
Sheath diameter	Ø4.8 mm
Bending radius	> 35 mm
Color	orange
Cores	4 x 0.34 mm ² and 1 x 0.5 mm ²
Conductor construction	19 x 0.15 mm Ø and 28 x 0.15 mm Ø
Length	L 1.5 m
Flammability	
Contact material	94 V-2
Housing	94 V-2

Electrical connection

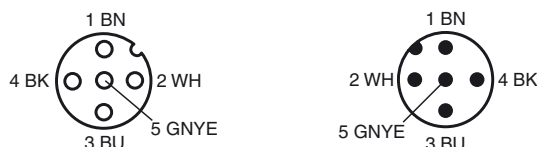

Release date: 2012-01-18 18:30 Date of issue: 2012-01-18 112660_eng.xml

Subject to modifications without notice

Pepperl+Fuchs Group
www.pepperl-fuchs.com

USA: +1 330 486 0001
fa-info@us.pepperl-fuchs.com

Germany: +49 621 776-4411
fa-info@pepperl-fuchs.com

Copyright Pepperl+Fuchs
Singapore: +65 6779 9091
fa-info@sg.pepperl-fuchs.com