





Dimensions



62
Spec 2.1

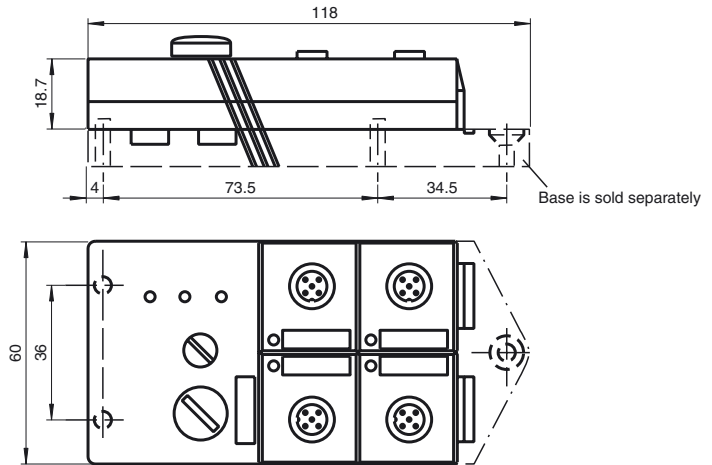

Electrical connection

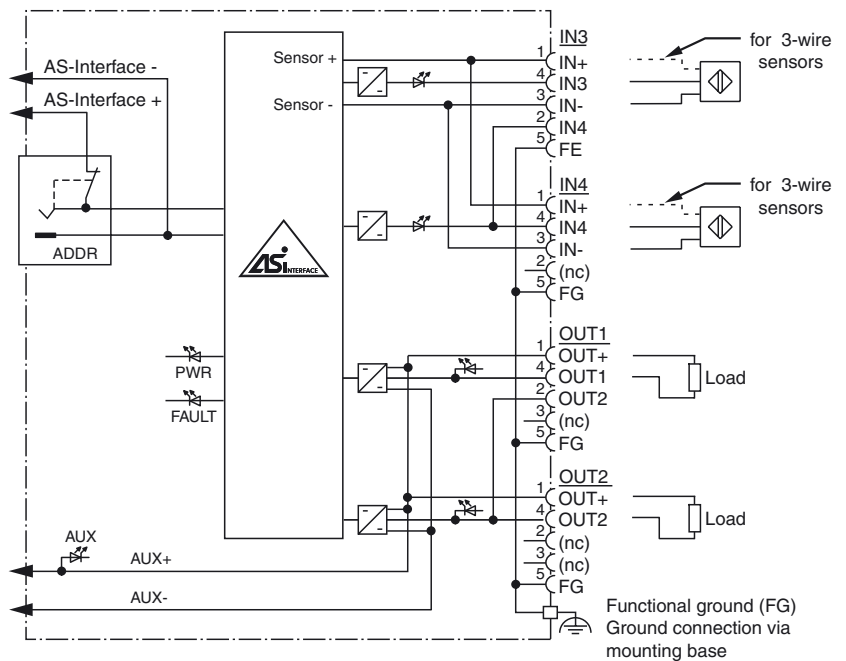

Model Number


VBA-2E2A-G2-ZA0/EA0

G2 flat module
2 inputs (NPN) and 2 electronic outputs

Features

- AS-Interface certificate
- Protection degree IP67
- A/B slave with extended addressing possibility for up to 62 slaves
- Addressing jack
- Flat cable connection with cable piercing technique, variable flat cable guide
- Communication monitoring
- Inputs for 2-, 3-, and 4-wire sensors
- Power supply of outputs from the external auxiliary voltage
- Supply for inputs from AS-Interface
- Ground connection (FE) possible
- Function display for bus, ext. auxiliary voltage, inputs and outputs
- Detection of overload on sensor supply
- Detection of output overload

Indicating / Operating means

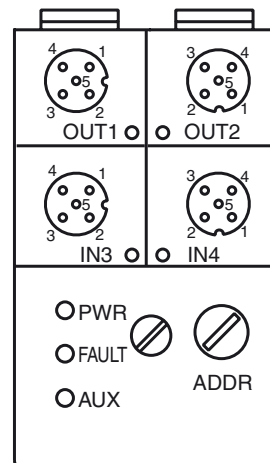

Release date: 2007-03-27 15:31 Date of issue: 2007-03-27 122967_ENG.xml

Technical data

General specifications

Slave type	A/B slave
------------	-----------

Indicators/operating means

LED FAULT	error display; LED red red: communication error or address is 0 red flashing: overload of sensor power supply or outputs
LED PWR	AS-Interface voltage; LED green
LED AUX	ext. auxiliary voltage U_{AUX} ; LED green
LED IN	switching state (input); 2 LED yellow
LED OUT	switching state (output); 2 LED yellow

Electrical specifications

Auxiliary voltage (output)	U_{AUX}	20 ... 30 V DC PELV (protection class 3 according to VDE 0106/IEC 364-4-41)
Protection class		III
Rated operational voltage	U_e	26.5 ... 31.6 V from AS-Interface
Rated operational current	I_e	≤ 40 mA (without sensors) / max. 140 mA

Input

Number/Type	2 inputs for 2- or 3-wire sensors (NPN), DC alternative 1 input for 4-wire sensor (NPN), DC
Supply	from AS-Interface
Voltage	21 ... 31 V
Current loading capacity	≤ 100 mA ($T_B \leq 40 \text{ }^\circ\text{C}$), ≤ 75 mA ($T_B \leq 60 \text{ }^\circ\text{C}$), overload-proof and short-circuit proof
Input current	≤ 8 mA (limited internally)
Switching point	according to DIN EN 61131-2 (Type 2)
0 (unattenuated)	≤ 2 mA
1 (attenuated)	≥ 4 mA

Output

Number/Type	≤ 200 mA, PNP, overload and short-circuit proof
Supply	from external auxiliary voltage U_{AUX}
Current	1 A per output
Voltage	≥ ($U_{AUX} - 0.5 \text{ V}$)

Programming instructions

Profile	S-B.A.2
IO code	B
ID code	A
ID1 code	7
ID2 code	2

Data bits (function via AS-Interface)	input	output
D0	-	OUT1
D1	-	OUT2
D2	IN3	-
D3	IN4	-

Parameter bits (programmable via AS-i)	function
P0	not used
P1	not used
P2	not used
P3	not used

Ambient conditions

Ambient temperature	-25 ... 60 °C (248 ... 333 K)
Storage temperature	-25 ... 85 °C (248 ... 358 K)

Mechanical specifications

Protection degree	IP67 according to EN 60529
Connection	cable piercing method flat cable yellow/flat cable black inputs/outputs: M12 round connector
Material	
Housing	PBT
Mass	100 g
Mounting	Mounting base

Notes

In the case of 4-wire sensors, you must use slot IN3 for the inputs (internally bridged).

Function

The VBA-2E2A-G2-ZA0/EA0 is an AS-Interface interface module with 2 Inputs and 2 outputs. Mechanical contacts (e. g. push buttons) as well as 2-, 3- and 4-wire sensors can be connected to the inputs. The outputs are electronic outputs, which can be loaded to 24 V DC and 1 A per output.

The IP67 flat module is ideal for applications in the field. An addressing jack is integrated in the module.

Connection to the sensors/actuators is provided via M12 x 1 screw connections. An LED is provided for each channel, on the top of the module, to indicate the current switching status. Similarly, an LED is provided to monitor the AS-Interface communication and to indicate that the module has the address 0. LEDs are also provided to indicate the AS-Interface voltage and the external power supply.

The U-G3FF mounting base is normally used for the connection of the AS-Interface flat cable and the external 24 V DC power supply. The specially designed base enables the user to connect flat cable from both sides.

The device is equipped with communication monitoring, which switches off power to the inputs if no communication has taken place for longer than 40 ms.

An overloading of the internal power supply or of the outputs is signalled to the AS-Interface master via the "Peripheral fault" function. Communication via the AS-Interface remains intact.

Note:

The mounting base for the module is sold separately.

Accessories

VBP-HH1

AS-Interface handheld

VAZ-PK-1,5M-V1-G

Connection cable module/hand-held programming device

VAZ-FK-ED-G2

AS-Interface end seal

Matching system components

U-G3FF

AS-Interface module mounting base