



Model number

SACB-4/3-L-V17

Splitter box M8 quadruple with M12 connector

Features


- Flat housing
- Flexible plug-in
- metal inserts
- LED indicator for module supply and I/O status
- Protection degree IP67
- Oil resistant

Accessories

VAZ-V3-B

Blind plug

Dimensions

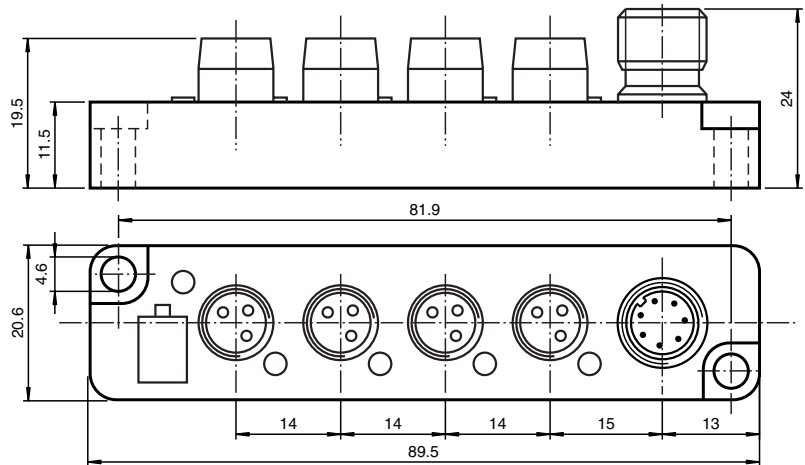

Technical data

General specifications

Number of poles 3

Indicators/operating means

LED green supply voltage each module
 LED yellow I/O status indication

Electrical specifications

Operating voltage 10 ... 30 V DC
 Operating current ≤ 5 mA per channel indication element
 Volume resistance ≤ 5 mΩ
 Current loading capacity ≤ 2 A per plug-in station,
 ≤ 4 A Total current per separator


Ambient conditions

Ambient temperature -15 ... 90 °C (258 ... 363 K)
 Degree of soiling 2

Mechanical specifications


Protection degree IP67 according to EN 60529 (only in screwed state with appropriate counterpart)
 Connection M12 round connector , 8-pin
 Sockets M8 , 3-pin
 Material
 Contacts CuZn , nickelous undercoating and 0,8 μm gold-plated
 Housing TPU (self-extinguishing)
 Threaded bushes CuZn, nickel-plated
 Mass approx. 60 g

Electrical connection

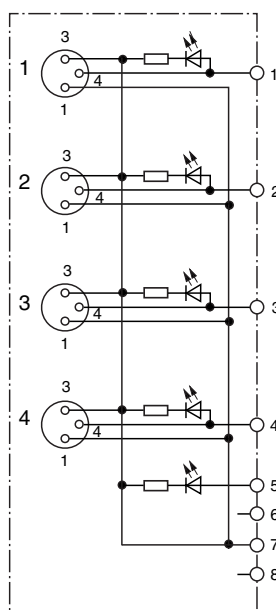


M12-connector	M8-socket/pole
1	1/4
2	2/4
3	3/4
4	4/4
5	1 ... 4/1
6	(free)
7	1 ... 4/3
8	(free)

Displays



M12-connector



M8-socket