




Features

- Installation box for outdoor mounting and moist rooms
- Transparent lid which can be locked
- Built-in DIN rail

Function

The installation box NVO5-KV is used, if the warning device LAL-SRW, NVO5-11 or NVO5-111 is to be attached outside of a switch cabinet or in a damp area. The status of the LEDs can be read through the transparent lid which can be opened if the alarm is going to be reset.

Dimensions

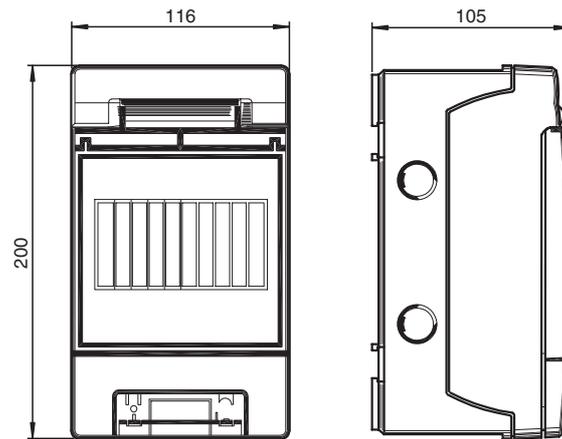

Technical data

Conformity	
Protection degree	EN 60529
Ambient conditions	
Ambient temperature	-40 ... 60 °C (-40 ... 140 °F)
Mechanical specifications	
Protection degree	IP65
Material	Polycarbonate
Mass	approx. 600 g
Dimensions	105 x 116 x 200 mm (4.1 x 4.6 x 7.8 in)