



Model Number

ICC-30GKA-T1

Code carrier

Features

- Battery-free code carrier
- 28 bit fixcode
- Readable from the printed side
- Embeddable mountable in metal
- Mounting with thread M30 x 1.5
- Protection degree IP67
- With extended temperature range up to 130 °C
- Protective cap ICS-30GK available

Accessories


IVZ-30G-EW

Screw-in tool

ICS-30GK

Protective cover

Dimensions

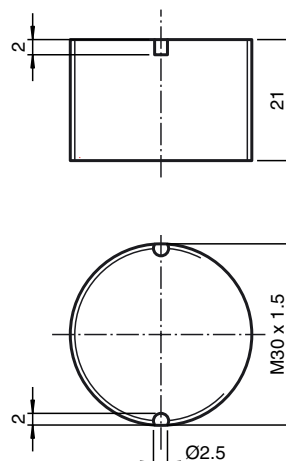

Technical data

General specifications

Operating frequency	250 kHz
Transfer rate	7.8 kBit/s
Life at high temperatures	operating (130 °C): 5000 h during storage (150 °C): 2500 h

Memory

Chip Type	P+F
Type/Size	ROM 64 bit (28 bit code, 36 bit data security)
Read cycles	unlimited

Ambient conditions

Ambient temperature	-25 ... 130 °C (248 ... 403 K)
Storage temperature	-40 ... 150 °C (233 ... 423 K)

Mechanical specifications

Protection degree	IP67
Material	
Housing	PA
Encapsulation compound	CY 221/HY 2966

Compliance with standards and directives

Standard conformity	
Protection degree	EN 60529

Notes

The surface containing the text must face the read/write head.