

Model Number


PL1-F25-B3-K

Valve positioner and valve control module


Features

- For installation in housing
- Pluggable cage clamp terminals
- PL1... with valve connection
- 4-way LED indicator
- Satisfies machinery directive
- Lead breakage and short-circuit monitoring of the valve
- After an AS-interface communication error the valve voltage falls

Connection



Dimensions

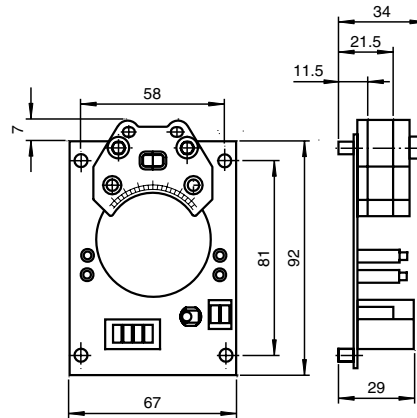

Technical Data

General specifications

Switching element function		programmable
Rated operating distance	s_n	3 mm
Installation		flush mountable
Output polarity		AS-Interface
Assured operating distance	s_a	0 ... 2.43 mm
Reduction factor r_{AI}		0.5
Reduction factor r_{303}		1
Reduction factor r_{S137}		1.1
Slave type		Standard slave
AS-Interface specification		V2.1
Required master specification		\geq V2.1

Nominal ratings

Operating voltage	U_B	26.5 ... 31.9 V via AS-Interface network
Switching frequency	f	0 ... 100 Hz
Reverse polarity protected		reverse polarity protected
Operating current	I_L	100 mA

Indicators/operating means

LED POWER	AS-Interface voltage; LED green
LED IN	switching state (input); LED yellow
LED OUT	binary LED yellow/red yellow: switching state red: lead breakage/short-circuit

Ambient conditions

Ambient temperature	-25 ... 70 °C (-13 ... 158 °F)
Storage temperature	-25 ... 85 °C (-13 ... 185 °F)

Mechanical specifications


Connection (system side)	4-pin CombiCon connector
Connection (valve side)	2-pin CombiCon connector
Housing material	PBT
Sensing face	PBT
Protection degree	IP00
Note	The valve voltage is limited of max. 26.4 V; valve power max. 2.1 W

Compliance with standards and directives

Standard conformity	
Standards	EN 60947-5-2:2007 IEC 60947-5-2:2007 EN 50295:1999

Release date: 2011-04-26 13:29 Date of issue: 2011-04-26 190761_ENG.xml

Supplementary information

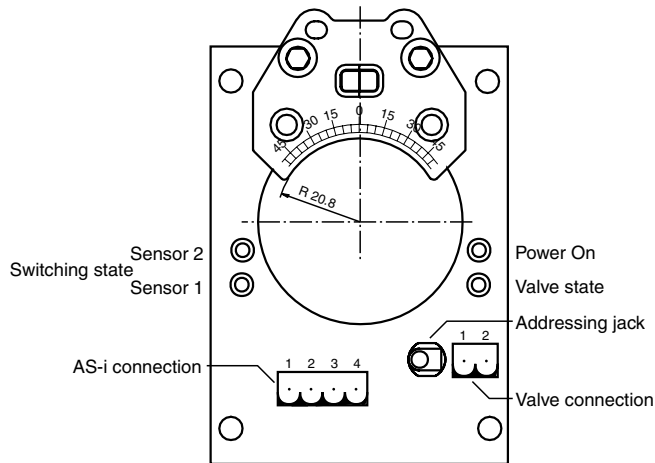

Programming instructions

Address 00 preset, alterable via Busmaster or
 IO-code D
 ID-code F
 ID1-code F
 ID2-code F

Data bit

Bit	Function
D0	valve status (0 = valve OFF; 1 = valve ON)
D1	valve fault ¹⁾ (0 = lead breakage/short circuit; 1 = no fault)
D2	switch output sensor 1 (0 = damped; 1 = undamped)
D3	switch output sensor 2 (0 = damped; 1 = undamped)

Parameterbit

Bit	Function
P0	not used
P1	not used
P2	not used
P3	not used

¹⁾ Verification only with actuated valve
(D0 = 1)

Programming instructions

Address	00 preset, alterable via Busmaster or
IO-code	D
ID-code	F
ID1-code	F
ID2-code	F

Data bit

Bit	Function
D0	valve status (0 = valve OFF; 1 = valve ON)
D1	valve fault ¹⁾ (0 = lead breakage/short circuit; 1 = no fault)
D2	switch output sensor 1 (0 = damped; 1 = undamped)
D3	switch output sensor 2 (0 = damped; 1 = undamped)

Parameterbit

Bit	Function
P0	not used
P1	not used
P2	not used
P3	not used

¹⁾ Verification only with actuated valve
(D0 = 1)

Fixing devices are being used everywhere in great number for product flow monitoring. In the majority of applications, these fixing devices are controlled pneumatically through a shaft rotation of 90° whose end position is typically reported back to the control system.

Standard housings as described in VDI/VDE 3845 (connection points, actuator, drive mechanism-actuator accessories) containing feedback proximity switches are used in most cases. The drive mechanisms are usually controlled by a control valve.

This printed circuit board was developed for use in just such standard housings. It includes connection technology (2 x AS-i and control valve), the NCN3-F25 double sensor and AS-i switching technology.

Proximity switch states, the control command for the pilot valve and electrical power can be transferred over the AS-i lead (2 inputs, 1 output).

A socket is provided for address programming. This means it is not necessary to form a loop with the AS-i line. A break in the valve cable is detected when this valve is activated and is reported back to the control system via the AS-i.