


Reduction factor = 1
 2 mm embeddable
 Magnetic field resistant



General specifications	
Switching element function	PNP Make function
Rated operating distance s_n	2 mm
Installation	embeddable
Output polarity	DC
Assured operating distance s_a	0 ... 1.62 mm
Reduction factor r_{AI}	1
Reduction factor r_{Cu}	1
Reduction factor r_{V2A}	1
Nominal ratings	
Operating voltage U_B	10 ... 30 V
Switching frequency f	0 ... 1000 Hz
Reverse polarity protection	protected against reverse polarity
Short-circuit protection	pulsing
Voltage drop U_d	≤ 3 V
Operating current I_L	0 ... 100 mA
Off-state current I_r	0 ... 0.5 mA typ. 0.1 μ A at 25 °C
No-load supply current I_0	≤ 15 mA
Indication of the switching state	Multihole-LED, yellow
Standard conformity	
Standards	IEC / EN 60947-5-2:2004
Ambient conditions	
Ambient temperature	-25 ... 70 °C (248 ... 343 K)
Mechanical specifications	
Connection type	V3-connector
Housing material	stainless steel 1.4305
Sensing face	Crastin (PBTB)
Protection degree	IP67

Connection type:

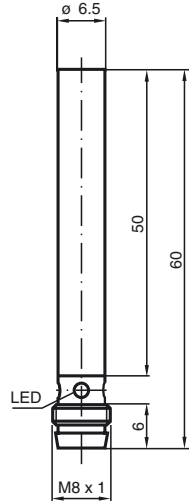