



Model Number


V19-W-5M-PUR54

Cable connector, M12, 8-pin, welding-bead resistant, PUR cable

Features

- Immunity to vibration, with mechanical latching
- Halogen-free and resistant to welding bead formation
- Knurled nut suitable for tool assembly
- Protection degree IP67 / IP68 / IP69K
- Gold-plated and machined contacts

Dimensions

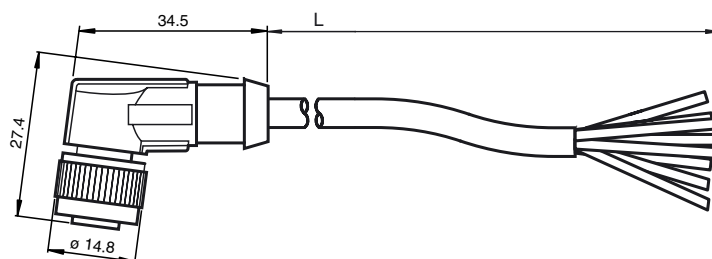

Technical data

General specifications

Number of pins	8
Connection 1	female connector
Construction type 1	right angle
Threading 1	M12
Connection 2	cable end

Electrical specifications

Operating current	max. 2 A
Volume resistance	< 5 mΩ
Nominal voltage	U_n 30 V
Insulation resistance	≥ 100 MΩ


Ambient conditions

Ambient temperature	-25 ... 90 °C (-13 ... 194 °F)
Pollution Degree	3

Mechanical specifications

Protection degree	IP65 / IP68 / IP69K
Material	
Contacts	CuZn
Contact surface	Ni/Au
Body	TPU, green
Cable	PUR
Slotted nut	CuZn, nickel-plated
Core insulation	PP
Cable	fine-strand, flexible
Sheath diameter	Ø4.8 mm
Bending radius	> 10 x cable diameter, appropriate for conveyor chains
Color	black
Cores	8 x 0.25 mm ²
Conductor construction	19 x 0.13 mm Ø
Length	L 5 m

Electrical connection



1	WH
2	BN
3	GN
4	YE
5	GY
6	PK
7	BU
8	RD