



Model Number


V19-G-BK2M-PUR

Cable socket, M12, 8-pin, PUR-cable

Features

- Knurled nut suitable for tool assembly
- Immunity to vibration, with mechanical latching
- Halogen-free
- Protection degree IP65 / IP68 / IP69K

Dimensions

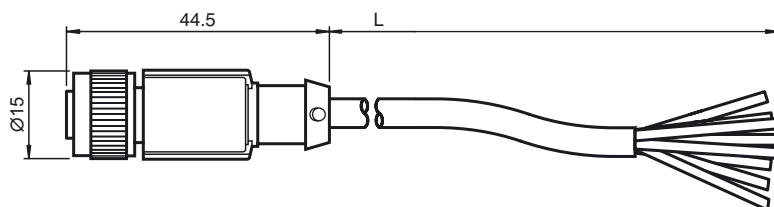

Technical data

General specifications

Number of pins	8
Connection 1	female connector
Construction type 1	straight
Threading 1	M12
Connection 2	cable end

Electrical specifications

Operating voltage	U_B	max. 30 V DC
Test voltage		> 1500 V _{eff} AC
Operating current		max. 2 A
Volume resistance		< 5 mΩ


Ambient conditions

Ambient temperature	-25 ... 90 °C (-13 ... 194 °F) cable, flexing: -5 ... 80 °C (23 ... 176 °F), cable, fixed: -40 ... 80 °C (-40 ... 176 °F)
Pollution Degree	3

Mechanical specifications

Pin diameter	1 mm
Protection degree	IP65 / IP68 / IP69K
Material	
Contacts	CuZn
Contact surface	Ni/Au
Body	TPU, black
Cable	PUR
Slotted nut	Zinc die-casting, nickel-plated
Seal	NBR
Core insulation	PP
Cable	fine-strand, flexible
Sheath diameter	Ø 5.9 mm
Bending radius	> 10 x cable diameter, appropriate for conveyor chains
Color	dark grey (RAL 7021)
Cores	8 x 0.25 mm ²
Conductor construction	32 x 0.1 mm Ø
Length	L 2 m
Flammability	
Housing	94 HB

Electrical connection



1	WH
2	BN
3	GN
4	YE
5	GY
6	PK
7	BU
8	RD