


## Dimensions

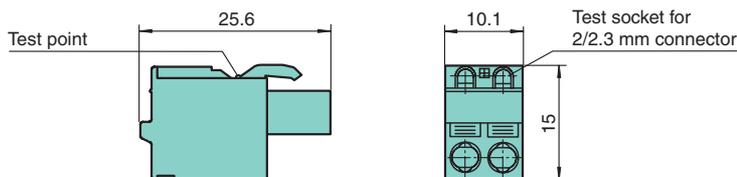

## Features

- 2-pin
- For KC modules
- Integrated test points for connection of HART communicators
- Connection safe area (green)
- Packaging unit: 5 pieces, green

## Function

The KC modules can be converted to have screwless cage spring terminals KC-FKCT-\*\*. It has integrated test points for connection of HART communicators.

## Technical data

Mechanical specifications	
Dimensions	10.1 x 15 x 25.6 mm (0.4 x 0.5 x 1 in)
Construction type	Cage clamp terminals with integrated test points

## Notes

The removable terminals guarantee protection from direct contact by means of a strengthened insulation. This applies to design insulation voltages with the occurrence of maximum overvoltages in accordance with overvoltage category III of EN 50178 (1500 V AC).

The voltage is to be switched off in the case of design insulation voltages greater than 50 V AC before connecting or disconnecting the device connectors.