



CE

Model Number


NBN3-F31-Z8-K-3G-3D

Features


- Direct mounting on standard actuators
- Compact and stable housing
- Fixed setting
- Satisfies machinery directive

Connection

Z8-K



Dimensions

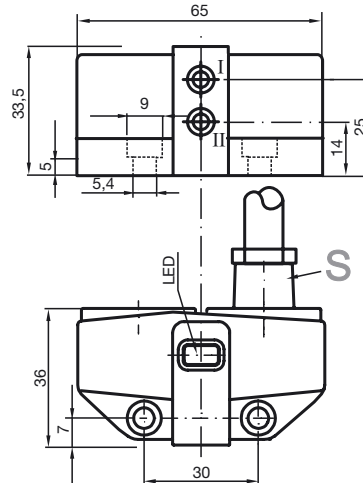

Technical Data

General specifications

Switching element function		PNPDual Make function
Rated operating distance	s_n	3 mm
Installation		flush mountable
Output polarity		DC
Assured operating distance	s_a	0 ... 2.43 mm
Reduction factor r_{AI}		0.5
Reduction factor r_{Cu}		0.4
Reduction factor r_{V2A}		1
Reduction factor r_{SI37}		1.1

Nominal ratings

Operating voltage	U_B	6 ... 60 V
Switching frequency	f	0 ... 500 Hz
Hysteresis	H	typ. 5 %
Reverse polarity protection		tolerant
Short-circuit protection		no
Voltage drop	U_d	≤ 6 V
Operating current	I_L	4 ... 100 mA
Off-state current	I_r	0 ... 1 mA typ. 0.7 mA
Indication of the switching state		LED, yellow

Limit data

Tightening torque, fixing screws	0.4 Nm
----------------------------------	--------

Ambient conditions

Ambient temperature	-25 ... 70 °C (248 ... 343 K)
---------------------	-------------------------------

Mechanical specifications

Connection (system side)	5 m, PVC cable
Core cross-section (system side)	0.75 mm ²
Housing material	PBT
Sensing face	PBT
Protection degree	IP67

General information

Use in the hazardous area	see instruction manuals
Category	3G; 3D

Compliance with standards and directives

Standard conformity	
Standards	EN 60947-5-2:2007 IEC 60947-5-2:2007

ATEX 3G (nA)

Instruction

Manual electrical apparatus for hazardous areas**Device category 3G (nA)**

Directive conformity

Standard conformity

CE symbol

Ex-identification

General

Installation, Commissioning

Maintenance

Special conditions

Maximum operating current I_L Maximum operating voltage U_{Bmax} Maximum permissible ambient temperature T_{Umax} -dependant of the load current I_L and the max. operating voltage U_{Bmax} . Information can be taken from the following list.at $U_{Bmax}=60\text{ V}$, $I_L=100\text{ mA}$ at $U_{Bmax}=60\text{ V}$, $I_L=50\text{ mA}$ at $U_{Bmax}=60\text{ V}$, $I_L=25\text{ mA}$

Protection from mechanical danger

Protection from UV light

Protection of the connection cable


for use in hazardous areas with gas, vapour and mist

94/9/EG

EN 60079-0:2006, EN 60079-15:2005

Ignition protection category "n"

Use is restricted to the following stated conditions


 II 3G Ex nA IIC T6 X

The apparatus has to be operated according to the appropriate data in the data sheet and in this instruction manual.

The data stated in the data sheet are restricted by this operating instruction! The special conditions must be observed!

Laws and/or regulations and standards governing the use or intended usage goal must be observed.

No changes can be made to apparatus, which are operated in hazardous areas.

Repairs to these apparatus are not possible.

The maximum permissible load current must be restricted to the values given in the following list. High load currents and load short-circuits are not permitted.

The maximum permissible operating voltage U_{Bmax} is restricted to the values in the following list. Tolerances are not permissible.

Information can be taken from the following list.

47 °C

55 °C

60 °C

The sensor must not be exposed to **ANY FORM** of mechanical danger.

The sensor and the connection cable must be protected from damaging UV-radiation. This can be achieved when the sensor is used in internal areas.

The connection cable must be prevented from being subjected to tension and torsional loading.

ATEX 3D (tD)

Instruction

Manual electrical apparatus for hazardous areas**Device category 3D**

Directive conformity

Standard conformity

CE symbol

Ex-identification

General

Installation, Commissioning

Maintenance

Special conditions

Maximum operating current I_L Maximum operating voltage U_{Bmax} Maximum permissible ambient temperature dependant of the load current I_L and the max. operating voltage U_{Bmax} . Information can be taken from the following list.at $U_{Bmax}=60$ V, $I_L=100$ mAat $U_{Bmax}=60$ V, $I_L=50$ mAat $U_{Bmax}=60$ V, $I_L=25$ mA

Protection from mechanical danger

Protection from UV light

Electrostatic charging

Protection of the connection cable

for use in hazardous areas with combustible dust

94/9/EG

EN 61241-0:2006, EN 61241-1:2004

Protection via housing "tD"

Use is restricted to the following stated conditions

CE

II 3D Ex tD A22 IP67 T80°C X

The apparatus has to be operated according to the appropriate data in the data sheet and in this instruction manual. The maximum surface temperature has been determined in accordance with method A without a dust layer on the equipment.

The data stated in the data sheet are restricted by this operating instruction!

The special conditions must be adhered to!

Laws and/or regulations and standards governing the use or intended usage goal must be observed.

No changes can be made to apparatus, which are operated in hazardous areas.

Repairs to these apparatus are not possible.

The maximum permissible load current must be restricted to the values given in the following list.

High load currents and load short-circuits are not permitted.

The maximum permissible operating voltage U_{Bmax} must be restricted to the values given in the following list. Tolerances are not permitted.

47 °C

55 °C

60 °C

The sensor must not be exposed to **ANY FORM** of mechanical danger.

The sensor and the connection cable must be protected from damaging UV-radiation. This can be achieved when the sensor is used in internal areas.

Sliding contact discharges must be avoided.

The connection cable must be prevented from being subjected to tension and torsional loading.