



Model Number


VMC-2+PE

Valve connector Form C, non pre-wired

Features

- Freely selectable cable outlet due to rotating insert

Dimensions

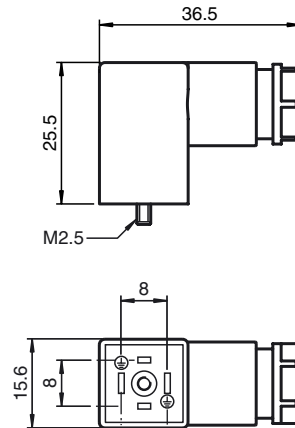

Technical data

General specifications

| | |
|---------------------|---------------------|
| Number of poles | 2 + PE |
| Connection 1 | Valve connector DIN |
| Construction type 1 | angled |

Electrical specifications

| | | |
|-------------------|-------|-----------------|
| Operating voltage | U_B | 250 V AC/DC |
| Operating current | | max. 6 A |
| Volume resistance | | < 15 m Ω |

Ambient conditions

| | |
|---------------------|--------------------------------|
| Ambient temperature | -20 ... 120 °C (253 ... 393 K) |
| Pollution Degree | 3 |

Mechanical specifications

| | |
|-------------------|--|
| Protection degree | IP65 |
| Connection | Valve connector shape C Screw terminals for max. 0.75 mm ² |
| Material | |
| Contacts | CuSn |
| Contact surface | Ni |
| Handle | PA |
| Cable | |
| Sheath diameter | 4 ... 6 mm |

Electrical connection

