




Model Number

NEB22-30GM60-E2

Features

- 22 mm quasi-embeddable
- Increased operating distance


Connection



Accessories

BF 30
Mounting flange, 30 mm

Dimensions



Technical Data

General specifications

Switching element function	PNP	NO
Rated operating distance	s_n	22 mm
Installation	quasi embedd.	
Output polarity	DC	
Assured operating distance	s_a	0 ... 17.8 mm
Reduction factor r_{AI}	0.25	
Reduction factor r_{Cu}	0.22	
Reduction factor r_{303}	0.65	

Nominal ratings

Installation conditions		
A	6 mm	
B	37 mm	
C	66 mm	
F	80 mm	
Operating voltage	U_B	10 ... 30 V
Switching frequency	f	0 ... 150 Hz
Hysteresis	H	≤ 10 %
Reverse polarity protected	reverse polarity protected	
Short-circuit protection	pulsing	
Voltage drop	U_d	≤ 5 V
Operating current	I_L	0 ... 200 mA
Off-state current	I_r	≤ 0.1 mA
No-load supply current	I_0	≤ 10 mA
Indication of the switching state	LED, yellow	

Functional safety related parameters

MTTF _d	213 a
Mission Time (T _M)	20 a
Diagnostic Coverage (DC)	0 %

Ambient conditions

Ambient temperature	-25 ... 70 °C (-13 ... 158 °F)
---------------------	--------------------------------

Mechanical specifications

Connection type	cable PVC , 2 m
Core cross-section	0.34 mm ²
Housing material	chromium plated brass
Sensing face	PBT
Protection degree	IP67


Compliance with standards and directives

Standard conformity	
Standards	EN 60947-5-2:2007 IEC 60947-5-2:2007

Approvals and certificates

CCC approval	Products with a maximum operating voltage of ≤36 V do not bear a CCC marking because they do not require approval.
--------------	--

Installation conditions

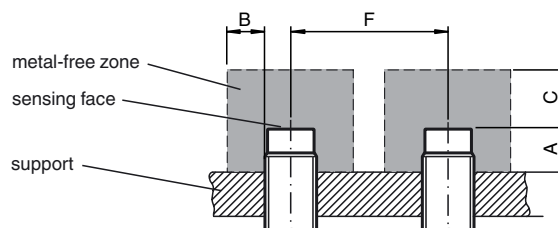

Release date: 2011-07-14 10:58 Date of issue: 2011-07-14 23:1570_eng.xml