




Model Number

NEN10-12GM50-E1

Features

- Increased operating distance
- 10 mm not embeddable


Connection



Accessories

- EXG-12**
Quick mounting bracket with dead stop
- BF 12**
Mounting flange, 12 mm

Dimensions




Technical Data

General specifications			
Switching element function		NPN	NC
Rated operating distance	s_n	10 mm	
Installation		not embeddable	
Output polarity		DC	
Assured operating distance	s_a	0 ... 8.1 mm	
Actuating element		structural steel, e. g. 1.0037, SR235JR (formerly St37-2) 30 mm x 30 mm x 1 mm	
Reduction factor r_{Al}		0.45	
Reduction factor r_{Cu}		0.4	
Reduction factor r_{304}		0.75	
Reduction factor r_{Brass}		0.45	
Nominal ratings			
Installation conditions			
A		in steel 1.0037 (St37): 10 mm	
B		16 mm	
C		30 mm	
F		42 mm	
Operating voltage	U_B	10 ... 30 V DC	
Switching frequency	f	0 ... 600 Hz	
Hysteresis	H	0.06 ... 1 mm	
Reverse polarity protected		yes	
Short-circuit protection		pulsing	
Overload resistance		yes	
Wire breakage protection		yes	
Surge suppression		yes	
Ripple		10 %	
Voltage drop	U_d	≤ 2 V	
Repeat accuracy		0.3 mm	
Operating current	I_L	0 ... 200 mA, above 70°C ≤ 150 mA	
Off-state current	I_r	≤ 10 μ A	
No-load supply current	I_0	≤ 15 mA	
Indication of the switching state		LED, yellow	
Functional safety related parameters			
MTTF _d		1740 a	
Mission Time (T _M)		20 a	
Diagnostic Coverage (DC)		0 %	
Ambient conditions			
Ambient temperature		-25 ... 85 °C (-13 ... 185 °F)	
Storage temperature		-40 ... 85 °C (-40 ... 185 °F)	
Mechanical specifications			
Connection type		cable PUR, 2 m	
Core cross-section		0.34 mm ²	
Housing material		brass, nickel-plated	
Sensing face		PBT	
Protection degree		IP67	
Mass		100 g	
Tightening torque, fastening screws		max. 10 Nm	
Compliance with standards and directives			
Standard conformity			
Standards		EN 60947-5-2:2007 IEC 60947-5-2:2007	
Approvals and certificates			
UL approval		cULus Listed, General Purpose	
CCC approval		Products with a maximum operating voltage of ≤ 36 V do not bear a CCC marking because they do not require approval.	

Release date: 2012-01-23 16:23 Date of issue: 2012-02-13 23:17:18_eng.xml

Installation conditions

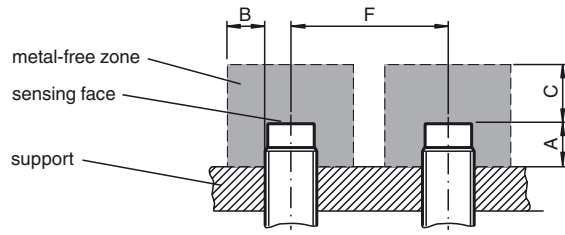

Release date: 2012-01-23 16:23 Date of issue: 2012-02-13 231718_eng.xml