



**Model Number**


**V19-G-10M-PVC-TP**

Connecting cable, M12 to open cable end, 8-pin shielded PVC cable

**Features**

- Metal housing
- Iris spring screening
- Shielded twisted pair
- Appropriate for conveyor chains

**Dimensions**

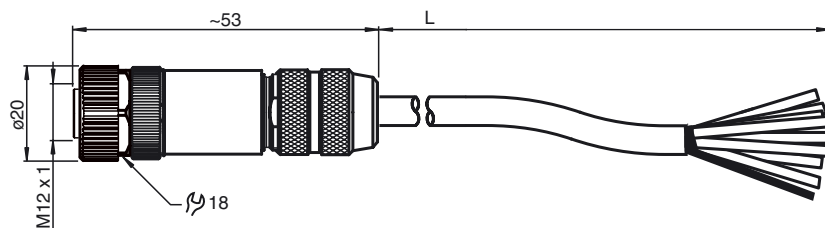

**Technical data**

**General specifications**

Number of pins	8 + shield
Connection 1	female connector
Construction type 1	straight
Threading 1	M12
Connection 2	cable end

**Electrical specifications**

Operating voltage	$U_B$	max. 30 V AC/DC
Operating current		max. 2 A
Characteristic impedance		100 $\Omega \pm 15 \Omega$ (> 1 MHz)


**Ambient conditions**

Ambient temperature	-25 ... 70 °C (-13 ... 158 °F)
---------------------	--------------------------------

**Mechanical specifications**

Protection degree	IP67
Material	
Contacts	CuZn
Contact surface	Au
Body	Zinc die-casting, nickel-plated
Cable	PVC
Core insulation	PVC
Cable	fine-strand, flexible
Sheath diameter	Ø 6.2 mm
Bending radius	> 15 x cable diameter, appropriate for conveyor chains > 6 x cable diameter, fixed
Color	grey
Cores	4 x 2 x 0.14 mm <sup>2</sup>
Shield	grid
Length	L 10 m

**Electrical connection**

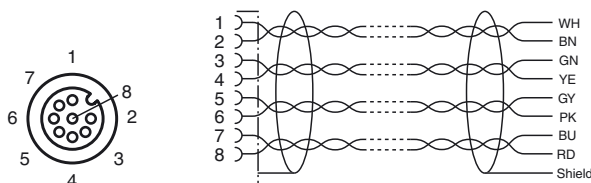

Release date: 2012-08-22 04:29 Date of issue: 2012-08-22 233955-0004\_eng.xml

Subject to modifications without notice

Pepperl+Fuchs Group  
www.pepperl-fuchs.com

USA: +1 330 486 0001  
fa-info@us.pepperl-fuchs.com

Germany: +49 621 776-4411  
fa-info@pepperl-fuchs.com

Copyright Pepperl+Fuchs  
Singapore: +65 6779 9091  
fa-info@sg.pepperl-fuchs.com

**PEPPERL+FUCHS**  
SENSING YOUR NEEDS