



CE


Model Number

NBB10-30GM50-Z0-T

Features

- Extended temperature range
- 10 mm flush
- Two wire, normally open contact

Connection



Accessories


BF 30

Mounting flange, 30 mm

EXG-30

Quick mounting bracket with dead stop

Dimensions

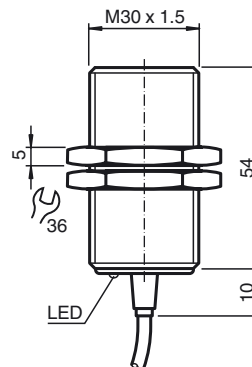

Technical Data

General specifications

Switching element function	DC	NO
Rated operating distance	s_n	10 mm
Installation		flush
Output polarity		DC
Assured operating distance	s_a	0 ... 8.1 mm
Actuating element		mild steel, e. g. 1.0037, SR235JR (formerly St37-2) 30 mm x 30 mm x 1 mm
Reduction factor r_{Al}		0.4
Reduction factor r_{Cu}		0.3
Reduction factor r_{304}		0.7
Reduction factor r_{Brass}		0.4

Nominal ratings

Installation conditions		
B		25 mm
C		16 mm
F		37 mm
Operating voltage	U_B	15 ... 30 V
Switching frequency	f	0 ... 300 Hz
Hysteresis	H	0.05 ... 2.2 mm
Reverse polarity protection		yes
Short-circuit protection		no
Overload resistance		no
Wire breakage protection		yes
Inductive overvoltage protection		yes
Surge suppression		yes
Ripple		10 %
Voltage drop	U_d	≤ 8 V
Repeat accuracy		0.3 mm
Operating current	I_L	2 ... 25 mA
Lowest operating current	I_m	2 mA
No-load supply current	I_0	≤ 1.5 mA
Time delay before availability	t_v	≤ 40 ms
Switching state indication		LED, yellow

Functional safety related parameters

Mission Time (T_M)	20 a
Diagnostic Coverage (DC)	0 %

Ambient conditions

Ambient temperature	-25 ... 100 °C (-13 ... 212 °F)
Storage temperature	-40 ... 100 °C (-40 ... 212 °F)

Mechanical specifications

Connection type	cable PUR, 2 m
Core cross-section	0.25 mm ²
Housing material	brass, nickel-plated
Sensing face	PBT
Protection degree	IP67
Mass	145 g

Compliance with standards and directives

Standard conformity	
Standards	EN 60947-5-2:2007 IEC 60947-5-2:2007

Approvals and certificates

CCC approval	Products with a maximum operating voltage of ≤ 36 V do not bear a CCC marking because they do not require approval.
--------------	--