




Model Number

NBN15-30GK50-E3-M

Features

- 15 mm non-flush
- e1-Type approval
- With increased sealing, protection class IP68 / IP69k
- Extended temperature range
- Extended operating voltage range


Connection



Accessories

BF 30
Mounting flange, 30 mm

Dimensions

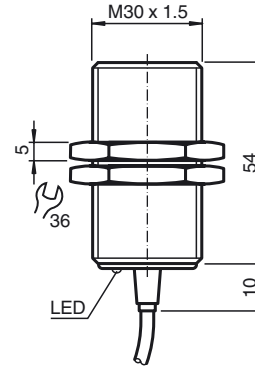

Technical Data

General specifications

Switching element function	PNP	NC
Rated operating distance	s_n	15 mm
Installation	non-flush	
Output polarity	DC	
Assured operating distance	s_a	0 ... 12.15 mm
Actuating element	mild steel, e. g. 1.0037, SR235JR (formerly St37-2) 45 mm x 45 mm x 1 mm	
Reduction factor r_{Al}	0.4	
Reduction factor r_{Cu}	0.3	
Reduction factor r_{304}	0.7	
Reduction factor r_{Brass}	0.4	

Nominal ratings

Installation conditions		
A	15 mm	
B	15 mm	
C	25 mm	
F	80 mm	
Operating voltage	U_B	10 ... 65 V
Switching frequency	f	0 ... 300 Hz
Hysteresis	H	0.04 ... 3.3 mm
Reverse polarity protected	yes	
Short-circuit protection	yes	
Overload resistance	yes	
Wire breakage protection	yes	
Inductive overvoltage protection	yes	
Surge suppression	yes	
Ripple	10 %	
Voltage drop	U_d	≤ 2.5 V
Repeat accuracy	0.4 mm	
Operating current	I_L	0 ... 300 mA
Off-state current	I_r	≤ 0.01 mA
No-load supply current	I_0	≤ 10 mA
Indication of the switching state	LED, yellow	

Functional safety related parameters

MTTF _d	1190 a
Mission Time (T_M)	20 a
Diagnostic Coverage (DC)	0 %

Ambient conditions

Ambient temperature	-40 ... 85 °C (-40 ... 185 °F)
Storage temperature	-40 ... 85 °C (-40 ... 185 °F)

Mechanical specifications

Connection type	cable PUR, 2 m
Core cross-section	0.75 mm ²
Housing material	PPS
Sensing face	PPS
Protection degree	IP68
Mass	160 g


Compliance with standards and directives

Standard conformity	
Standards	EN 60947-5-2:2007 IEC 60947-5-2:2007

Approvals and certificates

e1 Type approval	2006/28/EG
------------------	------------

Installation conditions

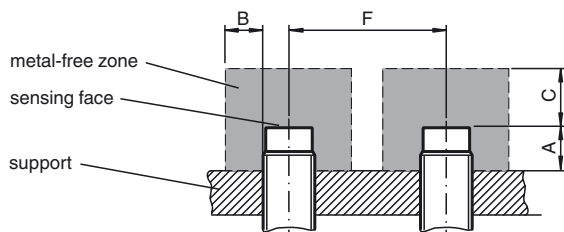

Installation hint

Interference emission and immunity according to Motor Vehicle Directive 2006/28/EC (e1 type approval)
 Immunity according to DIN ISO 11452-2: 30 V/m
 Frequency band of 20 MHz to 2 GHz

Conducted interference according to ISO 7637-2:

Pulse	1	2a	2b	3 a	3b	4
Severity	III	III	III	III	III	III
Failure criterion	C	A	C	A	A	A

EN 61000-4-2 was measured according to the requirements in IEC
 EN 60947-5-2 (4 kV for metal, 8 kV for plastic)
 EN 61000-4-3: 30 V/m (80 - 2500 MHz)
 Severity IV
 EN 61000-4-4: 2 kV
 Severity III
 EN 61000-4-6: 10 V (0.01- 80 MHz)
 Severity III
 EN 55011: Class A