




### Model Number

NBN15-30GK50-E2-M

### Features

- 15 mm non-flush
- e1-Type approval
- With increased sealing, protection class IP68 / IP69k
- Extended temperature range
- Extended operating voltage range


### Connection



### Accessories

**BF 30**  
Mounting flange, 30 mm

### Dimensions

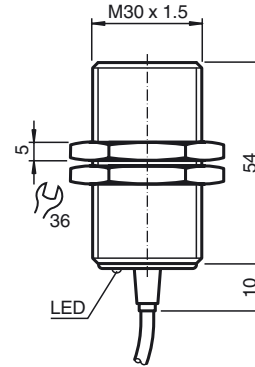

### Technical Data

#### General specifications

Switching element function	PNP	NO
Rated operating distance	$s_n$	15 mm
Installation		non-flush
Output polarity		DC
Assured operating distance	$s_a$	0 ... 12.15 mm
Actuating element		mild steel, e. g. 1.0037, SR235JR (formerly St37-2) 45 mm x 45 mm x 1 mm
Reduction factor $r_{Al}$		0.4
Reduction factor $r_{Cu}$		0.3
Reduction factor $r_{304}$		0.7
Reduction factor $r_{Brass}$		0.4

#### Nominal ratings

Installation conditions	
A	15 mm
B	15 mm
C	25 mm
F	80 mm
Operating voltage	$U_B$ 10 ... 65 V
Switching frequency	$f$ 0 ... 300 Hz
Hysteresis	$H$ 0.04 ... 3.3 mm
Reverse polarity protected	yes
Short-circuit protection	yes
Overload resistance	yes
Wire breakage protection	yes
Inductive overvoltage protection	yes
Surge suppression	yes
Ripple	10 %
Voltage drop	$U_d$ $\leq 2.5$ V
Repeat accuracy	0.4 mm
Operating current	$I_L$ 0 ... 300 mA
Off-state current	$I_r$ $\leq 0.01$ mA
No-load supply current	$I_0$ $\leq 10$ mA
Indication of the switching state	LED, yellow

#### Functional safety related parameters

MTTF <sub>d</sub>	1640 a
Mission Time ( $T_M$ )	20 a
Diagnostic Coverage (DC)	0 %

#### Ambient conditions

Ambient temperature	-25 ... 85 °C (-13 ... 185 °F)
Storage temperature	-40 ... 85 °C (-40 ... 185 °F)

#### Mechanical specifications

Connection type	cable PUR, 2 m
Core cross-section	0.75 mm <sup>2</sup>
Housing material	PPS
Sensing face	PPS
Protection degree	IP68
Mass	160 g


#### Compliance with standards and directives

Standard conformity	
Standards	EN 60947-5-2:2007 IEC 60947-5-2:2007

#### Approvals and certificates

e1 Type approval	2006/28/EG
------------------	------------

**Installation conditions**

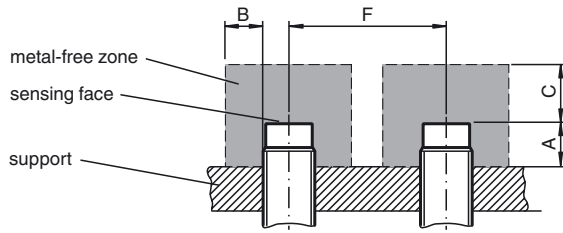

**Installation hint**

Interference emission and immunity according to Motor Vehicle Directive 2006/28/EC (e1 type approval)  
 Immunity according to DIN ISO 11452-2: 30 V/m  
 Frequency band of 20 MHz to 2 GHz

Conducted interference according to ISO 7637-2:

Pulse	1	2a	2b	3 a	3b	4
Severity	III	III	III	III	III	III
Failure criterion	C	A	C	A	A	A

EN 61000-4-2 was measured according to the requirements in IEC  
 EN 60947-5-2 (4 kV for metal, 8 kV for plastic)  
 EN 61000-4-3: 30 V/m (80 - 2500 MHz)  
 Severity IV  
 EN 61000-4-4: 2 kV  
 Severity III  
 EN 61000-4-6: 10 V (0.01- 80 MHz)  
 Severity III  
 EN 55011: Class A