



**Model Number**


**PR16-150-K-2-F-S**

Light grid  
with 7-pin flange connector

**Features**


- Detection range up to 1500 mm
- High-resolution light grid
- Suitable for recording of transparent objects
- Light grid with 16 beams, crossed or parallel
- Smallest obstacle size 2 mm
- Automatic switching threshold adaptation eliminates soiling effects

**Dimensions**

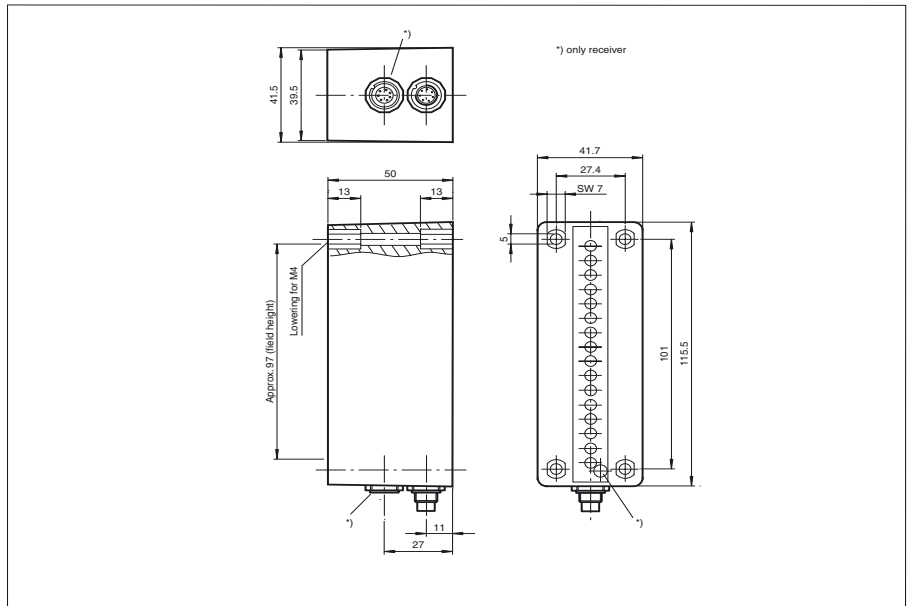


**Electrical connection**

Cable version

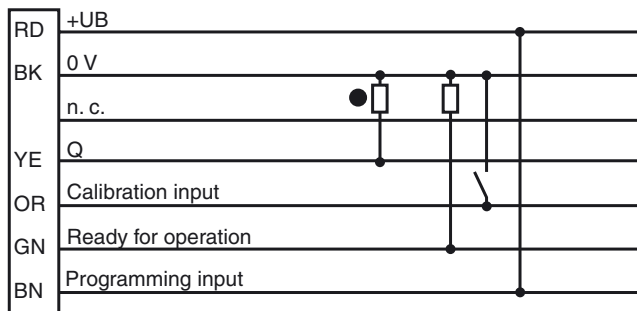

Connector version

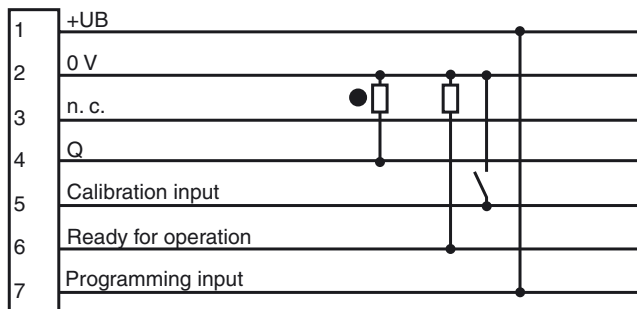

○ = Light on  
● = Dark on

Release date: 2007-09-24 09:54 Date of issue: 2007-09-24 417966\_ENG.xml

**Technical data**

**General specifications**

Effective detection range	500 ... 1500 mm
Threshold detection range	1500 mm
Light source	IREL
Approvals	CE
Field height	97 mm
Obstacle size	2 mm
Beam spacing	6.5 mm
Number of beams	16
Sensing range	0 ... 1500 mm
Light type	infrared, modulated light
Angle of divergence	± 8 °
Ambient light limit	20000 Lux

**Indicators/operating means**

Function display	LED yellow, functional readiness, LED red, switching state, lights up when the beam field is interrupted
------------------	--

**Electrical specifications**

Operating voltage	24 ... 28 V DC
Ripple	5 %

**Input**

Function input	Calibration input > 10 ms, ground active, fixed saving the switching threshold
----------------	--

**Output**

Switching type	dark ON
Signal output	1 pnp, short-circuit proof, open collector
Switching voltage	max. 28 V DC
Switching current	100 mA
Switching frequency f	6 Hz
Response time	40 ms

**Standard conformity**

Standards	EN 60947-5-2
-----------	--------------


**Ambient conditions**

Ambient temperature	-15 ... 50 °C (258 ... 323 K)
Storage temperature	-20 ... 75 °C (253 ... 348 K)


**Mechanical specifications**

Protection degree	IP67
Connection	7-pin, M8 x 1 connector
Material	
Housing	ABS
Optical face	PMMA
Mass	150 g (device)

**Curves/Diagrams**

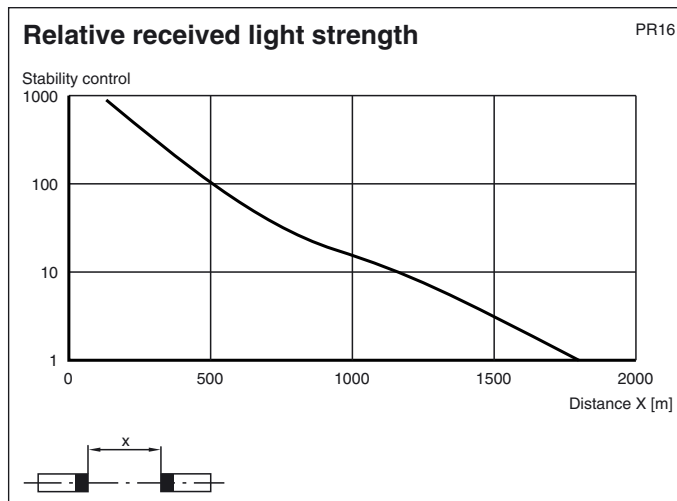

Release date: 2007-09-24 09:54 Date of issue: 2007-09-24 417968\_ENG.xml

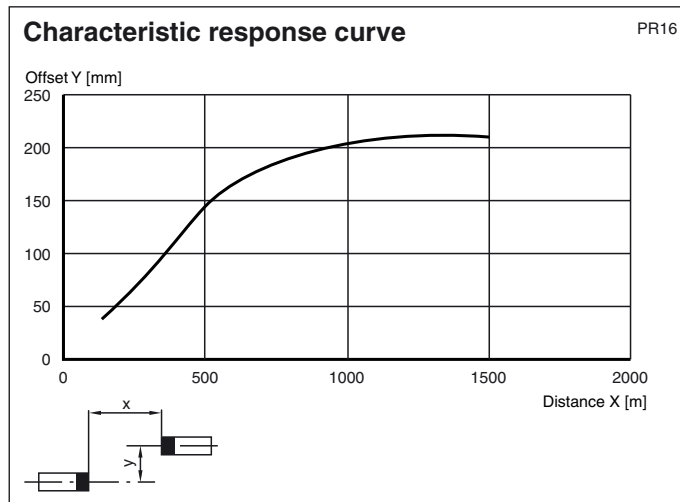

## Course of the beams



## Accessories

### Model number

Cable connector for light grid PR: V18-PR-ASK-VIS  
 Interconnecting cable for light grid PR: V18-PR-Verb-VIS