

Power supply/Power supply module

VS-GA/31/40a/Z-230V

CE



- ◆ Various possibilities for mounting
- ◆ Relay output for high power
- ◆ Adjustable time functions

General specifications

Approvals CE

Indicators/operating means

Operating elements light/dark switch, programming switch, time element, time adjuster

Electrical specifications

Operating voltage 230 V AC

Power consumption P_0 max. 5 VA

Output

Switching type light/dark switching

Signal output Relay, 1 alternator

Switching voltage max. 240 V AC

Switching current max. 2 A

Switching frequency f 25 Hz

Response time 20 ms

Timer function GAN, GAB, IAB, 0.1 ... 10 s programmable

Other outputs Sensor power supply 12 VDC

Standard conformity

Standards EN 60947-5-2

Ambient conditions

Ambient temperature -20 ... 60 °C (253 ... 333 K)

Storage temperature -20 ... 75 °C (253 ... 348 K)

Mechanical specifications

Protection degree IP40


Connection Connection terminals, max. conductor cross-sectional area 2.5 mm²

Material


Housing plastic

Mass 300 g

Dimensions

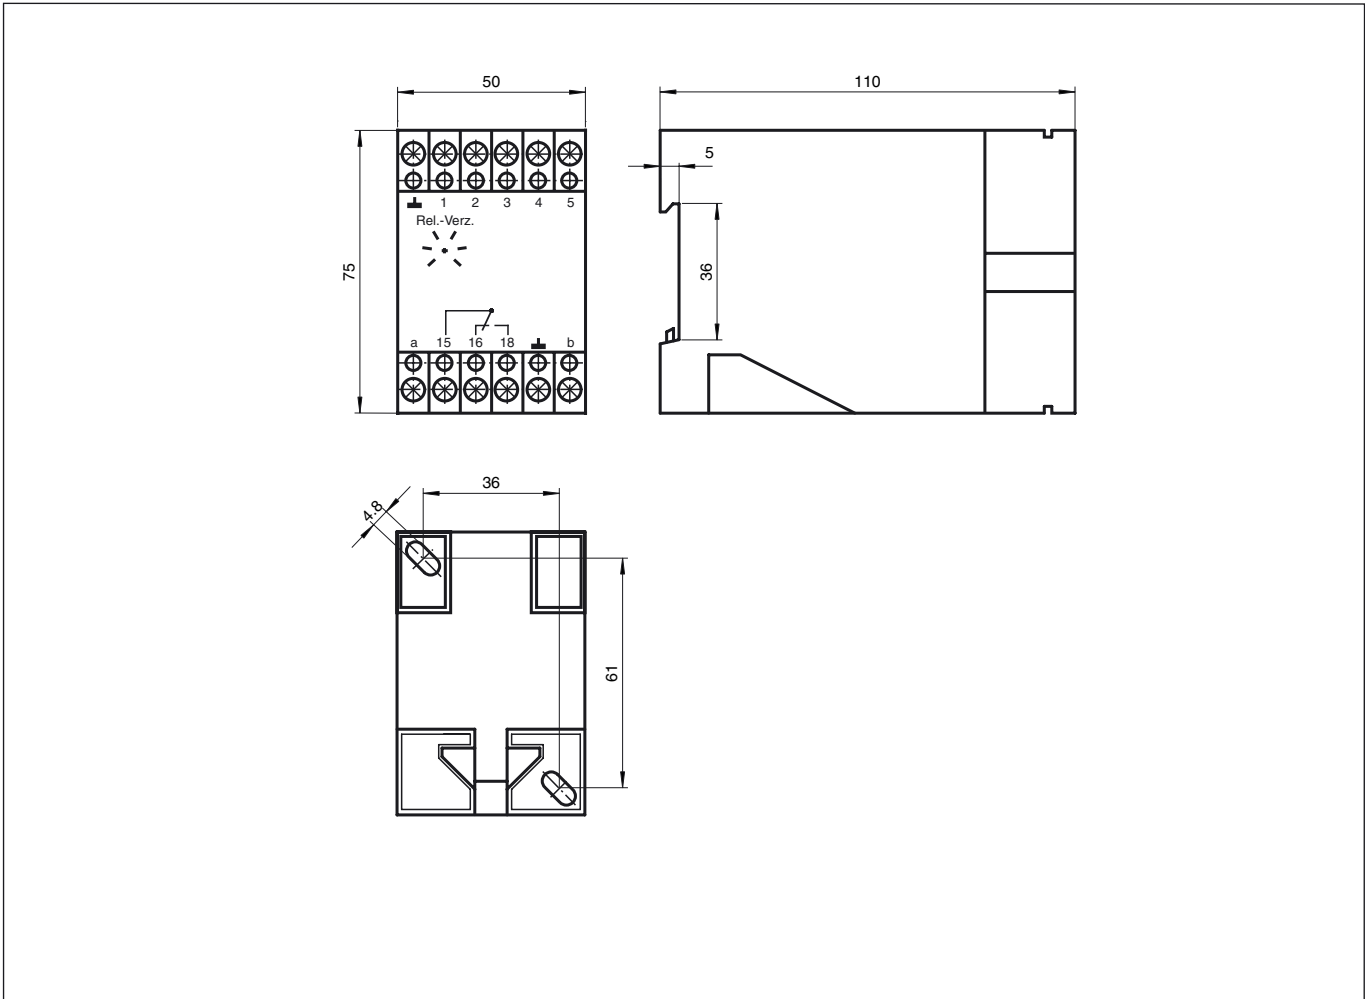

electrical connection

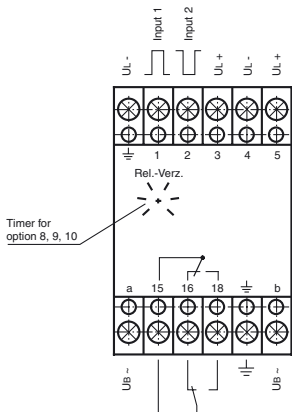

o = light ON, • = dark ON