




### Features

- Coil voltage 415V
- Cast Aluminium
- 335 mm x 310 mm x 205 mm
- Suitable for Ex e motors
- Installation in Zone 1, Zone 2, Zone 21 and Zone 22

### Dimensions (mm)

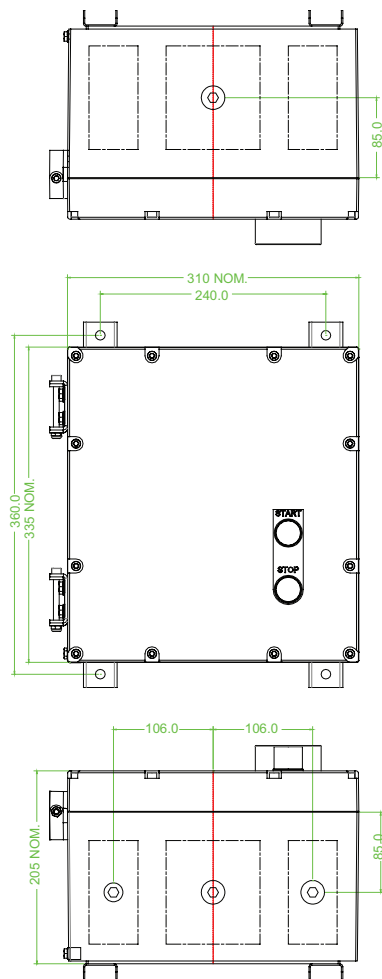

### Technical data

#### Electrical specifications

|                   |   |
|-------------------|---|
| Contactor rating  |   |
| Power             | 11 kW   |
| Current           | 22 A (AC3)  |
| Coil Voltage      | 415 V   |
| Terminal capacity | 6 mm <sup>2</sup> for flexible cable<br>9.6 mm <sup>2</sup> for solid cable |
| Overload relay    | 15 ... 26 A   |
| Phases            | 3   |
| Function          | star delta starter  |

#### Mechanical specifications

|                         |   |
|-------------------------|---|
| Height                  | 335 mm NOM.   |
| Width                   | 310 mm NOM.   |
| Depth                   | 205 mm NOM.   |
| Enclosure cover         | hinged non-detachable   |
| Cover fixing            | M8 stainless steel socket cap head screws   |
| Fastener grade          | A2-70   |
| Protection degree       | IP66  |
| Cable entry             | metric threaded   |
| Number of cable entries | 1 x M25 in face A<br>2 x M25 in face B<br>1 x M20 in face B<br>all entries are fitted with Ex d sealing plugs |
| Material                |   |
| Enclosure               | cast aluminium  |
| Finish                  | painted black   |
| Seal                    | one piece closed cell neoprene  |
| Mass                    | approx. 19 kg   |

|   |  |
|---|--|
| Mounting  | 2 x fabricated stainless steel mounting straps   |
| Grounding   | internal & external brass grounding terminals on base and lid  |
| <b>Ambient conditions</b>                               |  |
| Ambient temperature                                     | -40 ... 55 °C (-40 ... 131 °F)   |
| <b>Data for application in connection with Ex-areas</b> |  |
| EC-Type Examination Certificate                         | SIRA 04 ATEX 1266X   |
| Group, category, type of protection, temperature class  | Ⓧ II 2 GD<br>Ex d IIB T6 Gb, Ex tb IIIC T76°C Db ( ta ... +50°C )<br>Ex d IIB T5 Gb, Ex tb IIIC T82°C Db ( ta ... +55°C )  |
| <b>International approvals</b>                          |  |
| IECEX approval  | IECEX SIR 08.0056X   |
| GOST-R approval   | GOST-R B00218  |
| <b>Conformity</b>                                       |  |
| Protection degree                                       | EN 60529   |
| <b>General information</b>                              |  |
| Supplementary information                               | EC-Type Examination Certificate, Statement of Conformity, Declaration of Conformity, Attestation of Conformity and instructions have to be observed where applicable. For information see <a href="http://www.pepperl-fuchs.com">www.pepperl-fuchs.com</a> . |