


### Features

- Cast Stainless Steel
- Installation in Zone 1, Zone 2, Zone 21 and Zone 22
- Threaded cable entries
- Padlockable switch

### Dimensions (mm)

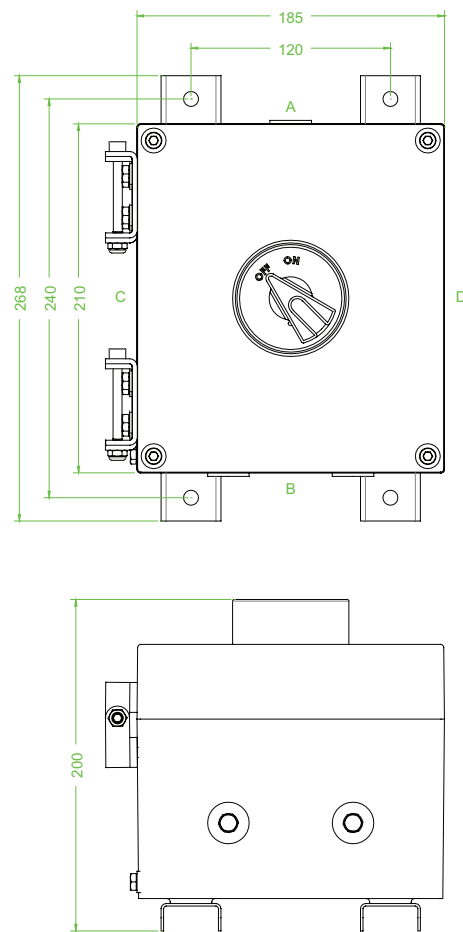

### Technical data

#### Electrical specifications

Operating voltage	690 V
Operating current	63 A (AC21A)
Power	22 kW (AC23A) 18.5 kW (AC3)

Terminal capacity	16 mm <sup>2</sup>
-------------------	--------------------

Function	switch disconnector
----------	---------------------

Number of poles	6
-----------------	---

Auxiliary contacts	2 x n/o early break
--------------------	---------------------

Lockable	in 'OFF' position
----------	-------------------

Labeling	OFF - ON
----------	----------

#### Mechanical specifications

Height	210 mm NOM.
--------	-------------

Width	185 mm NOM.
-------	-------------

Depth	200 mm NOM.
-------	-------------

Enclosure cover	hinged non-detachable
-----------------	-----------------------

Cover fixing	M6 stainless steel socket cap head screws
--------------	---

Fastener grade	A2-70
----------------	-------

Protection degree	IP66
-------------------	------

Cable entry	metric threaded
-------------	-----------------

Number of cable entries	1 x M25 in face A 2 x M25 in face B all entries are fitted with Ex d sealing plugs
-------------------------	--

Material	
----------	--

Enclosure	cast stainless steel
-----------	----------------------

Finish	painted black
--------	---------------

Seal	one piece closed cell neoprene
------	--------------------------------

Mass	approx. 21 kg
------	---------------

Mounting	2 x fabricated stainless steel mounting straps
Grounding	internal & external brass grounding terminals on base and lid
<b>Ambient conditions</b>	
Ambient temperature	-20 ... 55 °C (-4 ... 131 °F)
<b>Data for application in connection with Ex-areas</b>	
EC-Type Examination Certificate	SIRA 03 ATEX 1215
Group, category, type of protection, temperature class	⊕ II 2 GD Ex d IIB T6 Gb, Ex tb IIIC T80°C ( ta ... +40°C ) Ex d IIB T5 Gb, Ex tb IIIC T95°C ( ta ... +55°C )
<b>International approvals</b>	
IECEX approval	IECEX SIR 08.0055
GOST-R approval	GOST-R B00218
<b>Conformity</b>	
Protection degree	EN 60529
Switch	switch disconnecter to IEC 60947-3
<b>General information</b>	
Supplementary information	EC-Type Examination Certificate, Statement of Conformity, Declaration of Conformity, Attestation of Conformity and instructions have to be observed where applicable. For information see <a href="http://www.pepperl-fuchs.com">www.pepperl-fuchs.com</a> .